
GIGA-BYTE TECHNOLOGY CO. LTD. G A - 3 0 0

Card Type Video Chip Set Maximum Video Memory Video Types Supported Highest Resolution Supported Data Bus

Video card S3 1MB VRAM VGA, XVGA 1280 x 1024 32-bit VESA Local Bus

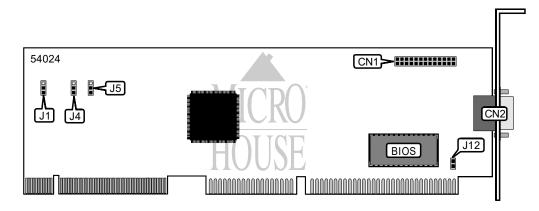

CONNECTIONS					
Function	Label	Function	Label		
Feature connector	CN1	15-pin analog video port C			

USER CONFIGURABLE SETTINGS					
Function	Label	Position			
IRQ9 enabled	J12	Closed			
IRQ9 disabled	J12	Open			

MONITOR CONFIGURATION SELECTION						
Resolution	Vertical	J1	J4	J5		
640 x 480	60Hz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed		
640 x 480	72Hz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed		
800 x 600	60Hz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed		
800 x 600	72Hz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed		
800 x 600	56Hz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed		
1024 x 768	43.5Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed		
1024 x 768	60Hz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed		
1024 x 768	72Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed		
1280 x 1024	43.5Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed		