



Intel® 852GME Chipset for Embedded Computing

Product Overview

The Intel® 852GME Chipset for Embedded Computing is an optimized integrated graphics solution with a 400/533 MHz system bus and integrated 32-bit 3D core at 133 MHz (at 533 MHz system bus). It features a low-power design, supports the Intel® Pentium® 4 processor and the Intel® Celeron® processor, and supports up to 2 GB of DDR 266/333 system memory.

Intel's platform architecture delivers the performance and high scalability required for today's cutting-edge e-business and e-home applications. The Intel 852GME chipset is part of Intel's comprehensive validation process that enables fast deployment of next-generation platforms to maximize competitive advantage while minimizing development risks.


Product Highlights

- The Intel 852GME chipset is designed, validated, and optimized for the Intel Pentium 4 processor and Intel Celeron processor with Intel® NetBurst® microarchitecture
- 400 MHz or 533 MHz system bus delivers a high-bandwidth connection between the processor and the platform
- Integrated graphics utilizing Intel® Extreme Graphics 2 technology
- AGP 4X support
- Advanced packaging technology and industry-leading electrical design innovations deliver long-term system reliability over wide operating conditions



- Three USB host controllers provide high-performance peripherals with 480 Mbps of bandwidth, while enabling support for up to six USB 2.0 ports. This results in a significant increase over previous integrated 1-4 port hubs at 12 Mbps
- The latest AC '97 implementation delivers 20-bit audio for enhanced sound quality and full surround sound capability. Integrated audio solutions continue to enjoy success as a very cost-effective, yet high-performance solution
- LAN Connect Interface (LCI) provides flexible network solutions such as 10/100 Mbps Ethernet and 10/100 Mbps Ethernet with LAN manageability
- Dual Ultra ATA/100 controllers, coupled with the Intel® Application Accelerator – a performance software package – support faster IDE transfers to storage devices

Intel in
Communications

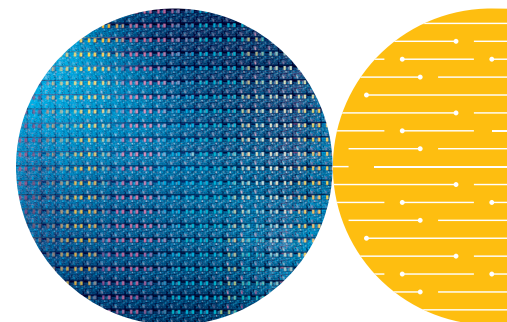

- Error Correcting Code (ECC) support in integrated graphics mode only
- The Intel Application Accelerator software provides additional performance over native ATA drivers by improving I/O transfer rates and enabling faster O/S load time, resulting in accelerated boot times
- Communication and Network Riser (CNR) offers flexibility in system configuration with a baseline feature set that can be upgraded with an audio card, modem card, or network card
- Embedded lifecycle support
- Integrated graphics

Display

- Analog display support
- Dual independent pipe support
 - Concurrent: different images and native display timings on each display device
 - Simultaneous: same images and native display timings on each display device
- DVO (DVOB and DVOC) support
 - Digital video out ports DVOB and DVOC with 165 MHz dot clock on each 12-bit interface; two 12-bit channels can be combined to form one dual-channel 24-bit interface with an effective dot clock of 330 MHz

- Compliant with DVI Specification 1.0
- Dedicated Local Flat Panel (LFP) LVDS interface

Internal Graphics Features

- Core frequency
 - Display core frequency of 133 MHz
 - Render core frequency of 133 MHz

Intel® Embedded Graphics Driver

- Graphics interface support
 - GDI and DirectX* DirectDraw* with overlay for Windows* XP, Windows* 2000, and Windows* Embedded XP
 - XFree86*, XAA, and Xv for Linux*
- Multi-monitor support
 - Multiple programmable configurations
 - Dual independent display
 - DVO device support/TV-Out
- Dynamic display-mode support
 - User definable and extensible
- Embedded video BIOS
 - Common port interface support
 - Full VGA compatibility

Intel® 852GME Chipset for Embedded Computing

Product	Product Code	Package	Features
852GME Memory Controller Hub (GMCH)	RG82852GME	732 micro-FC-BGA	<ul style="list-style-type: none"> ■ 400 MHz or 533 MHz System Bus ■ DDR 266/333 Memory ■ Integrated graphics support
I/O Controller Hub 4	FW82801DB	421 micro-BGA	<ul style="list-style-type: none"> ■ Direct connection to MCH with Intel® Accelerated Hub Architecture ■ Supports 32-bit PCI ■ IDE controllers with ATA/100 ■ Six USB ports with USB 2.0 support ■ AC '97 controller with 20-bit audio support ■ Integrated LAN connect interface

Intel Access

Developer's Site:	developer.intel.com
Embedded Intel Architecture Homepage:	www.intel.com/design/intarch
Intel Technical Documentation Center:	www.intel.com/go/techdoc
General Information Hotline:	(800) 628-8686 or (916) 356-3104 5 a.m. to 5 p.m. PST

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. Intel products are not intended for use in medical, life saving, or life sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

Copyright © 2003 Intel Corporation. All rights reserved.

Intel, the Intel logo, Pentium, Celeron, and NetBurst are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Printed in USA.

0903/0C/DC/PDF

Please Recycle

252970-002

