


# WYSE TECHNOLOGY, INC.

## WY-956

Q3/96

Data bus: 16-bit ISA  
 Size: Half-length, full-height card  
 Hard drive supported: Up to seven SCSI devices  
 Floppy drives supported: None

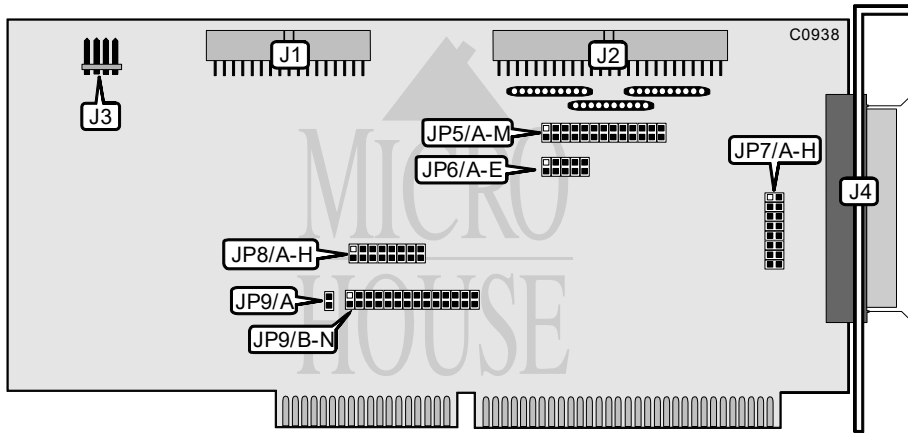

CONNECTIONS	
Function	Location
34-pin cable connector - floppy drive	J1
50-pin SCSI connector - internal	J2
4-pin connector - drive active LED	J3
50-pin SCSI connector - external	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Synchronous negotiation disabled	JP5/A	Open
Synchronous negotiation enabled	JP5/A	Closed
í Factory configured - do not alter	JP5/B	Open
í SCSI parity check enabled	JP5/C	Open
SCSI parity check disabled	JP5/C	Closed
í BIOS enable	JP6/A	Closed
BIOS disabled	JP6/A	Open
í Factory configured - do not alter	JP6/B	Open
í Factory configured - do not alter	JP6/C	Open
í Factory configured - do not alter	JP6/D	Open
í Auto sense disabled	JP6/E	Open
Auto sense enabled	JP6/E	Closed

Continued on next page. . .

WYSE TECHNOLOGY, INC.  
WY-956

...continued from previous page

USER CONFIGURABLE SETTINGS (CONTINUED)		
Function	Location	Setting
í Floppy secondary address disabled	JP7/A	Open
Floppy secondary address enabled	JP7/A	Closed
í Floppy drive interface disabled	JP8/A	Open
Floppy drive interface enabled	JP8/A	Closed
í Floppy drive is single speed	JP8/H	Open
Floppy drive is dual speed	JP8/H	Closed

BIOS ADDRESS SELECTION		
Address	JP7/G	JP7/H
í C8000-CBFFFh	Closed	Closed
CC000-CFFFFh	Closed	Open
D8000-DBFFFh	Open	Closed
DC000-DFFFFh	Open	Open

BIOS WAIT STATE SELECTION		
Delay	JP7/E	JP7/F
í 0 ns (IOCHRDY disabled)	Open	Open
100 ns	Closed	Open
200ns	Open	Closed
300ns	Closed	Closed

BASE I/O ADDRESS SELECTION			
Address	JP7/B	JP7/C	JP7/D
130h	Closed	Open	Closed
134h	Open	Open	Closed
230h	Closed	Closed	Open
234h	Open	Closed	Open
í 330h	Closed	Open	Open
334h	Open	Open	Open

Continued on next page. . .

WYSE TECHNOLOGY, INC.  
WY-956

...continued from previous page

FLOPPY DMA SELECTION				
Channel	JP8/B	JP8/C	JP8/D	JP8/E
í 2	Closed	Open	Closed	Open
3	Open	Closed	Open	Closed

FLOPPY INTERRUPT SELECTION		
Setting	JP8/F	JP8/G
í 6	Closed	Open
10	Open	Closed

SCSI ID SELECTION			
SCSI ID	JP5/D	JP5/E	JP5/F
0	Closed	Closed	Closed
1	Open	Closed	Closed
2	Closed	Open	Closed
3	Open	Open	Closed
4	Closed	Closed	Open
5	Open	Closed	Open
6	Closed	Open	Open
í 7	Open	Open	Open

DMA TRANSFER SPEED SELECTION		
Setting	JP5/L	JP5/M
í 5.0 MB/s	Open	Open
5.7MB/s	Closed	Open
6.7MB/s	Open	Closed
8.0MB/s	Closed	Closed

DMA SELECTION						
Channel	JP5/G	JP5/H	JP9/A	JP9/B	JP9/C	JP9/D
0	Closed	Closed	Closed	Open	Open	Open
í 5	Open	Closed	Open	Closed	Open	Open
6	Closed	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Open	Closed

DMA SELECTION (CONTINUED)				
Channel	JP9/E	JP9/F	JP9/G	JP9/H
0	Closed	Open	Open	Open
í 5	Open	Closed	Open	Open
6	Open	Open	Closed	Open
7	Open	Open	Open	Closed

Continued on next page.

WYSE TECHNOLOGY, INC.  
WY-956

...continued from previous page

INTERRUPT SELECTION									
IRQ	JP5/I	JP5/J	JP5/K	JP9/I	JP9/J	JP9/K	JP9/L	JP9/M	JP9/N
9	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Closed	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Closed	Open	Open	Open	Closed	Open	Open	Open
12	Closed	Closed	Open	Open	Open	Open	Closed	Open	Open
14	Open	Open	Closed	Open	Open	Open	Open	Closed	Open
15	Closed	Open	Closed	Open	Open	Open	Open	Open	Closed