


DATA TECHNOLOGY CORPORATION DTC2277 (TEKRAM VER. 1)

Chipset	Tekram
Maximum Onboard Memory	Unidentified
Data Bus	32-bit VESA local bus
Card Size	Full height, full length
Hard Drives Supported	Four IDE-AT devices
Floppy Drives Supported	Unidentified

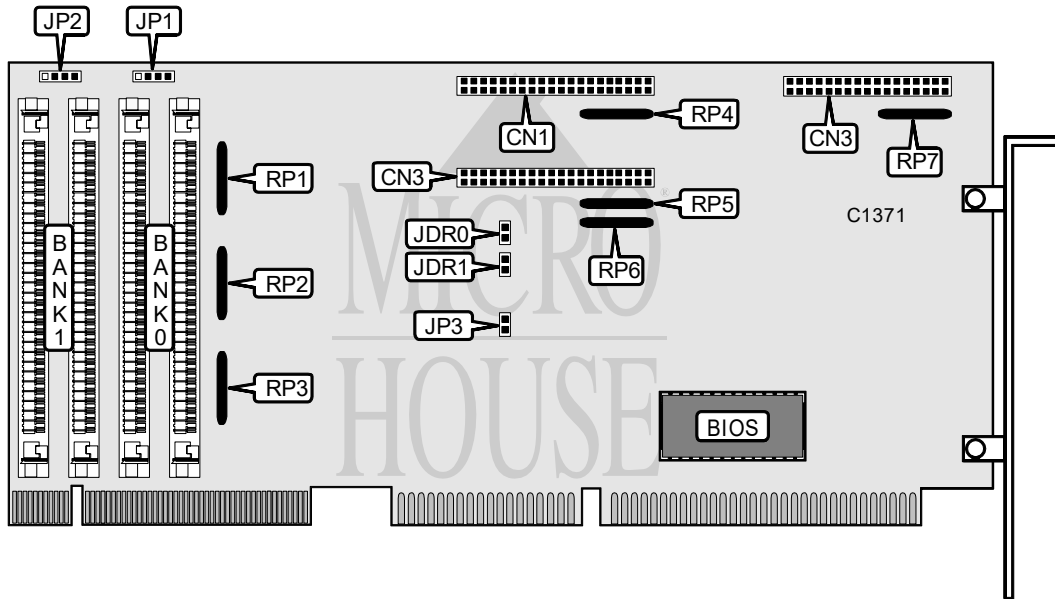

CONNECTIONS			
Function	Label	Function	Label
4-pin drive active LED	JP1	40-pin secondary IDE(AT) connector	CN2
4-pin connector to speaker	JP2	34-pin cable connector - floppy drive	CN3
40-pin primary IDE(AT) connector	CN1		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
Primary IDE channel noise filter mode 1 enabled	JDR0	Open	
Primary IDE channel noise filter mode 2 enabled	JDR0	Closed	
Secondary IDE channel noise filter mode 1 enabled	JDR1	Open	
Secondary IDE channel noise filter mode 2 enabled	JDR1	Closed	
Factory configured - do not alter	JP3	Unidentified	
Factory configured - do not alter	RP1	Unidentified	
Factory configured - do not alter	RP2	Unidentified	
Factory configured - do not alter	RP3	Unidentified	
Factory configured - do not alter	RP4	Unidentified	
Factory configured - do not alter	RP5	Unidentified	
Factory configured - do not alter	RP6	Unidentified	
Factory configured - do not alter	RP7	Unidentified	

Note: The exact implementation of the noise filter modes are unidentified. However, mode 1 is compatible with most hard drives.

Continued on next page. . .

DATA TECHNOLOGY CORPORATION
DTC2277 (TEKRAM VER. 1)

. . . continued from previous page

DRAM CONFIGURATION

The configuration of the memory is unidentified.