


DATA TECHNOLOGY CORPORATION

DTC3270VL (900032-89XX)

Data Bus 32-bit VESA local bus
Card Size Full height, full length
Hard Drives Supported Up to 7 SCSI-2 devices
Floppy Drives Supported Unidentified

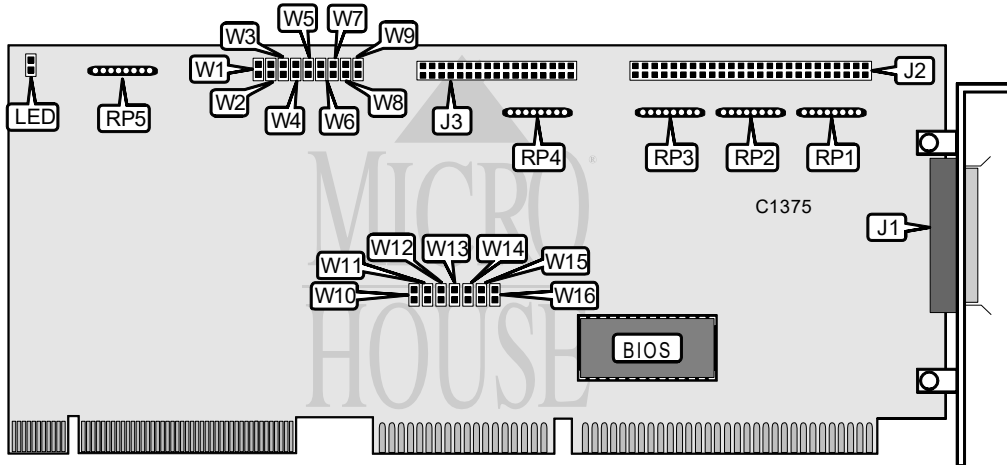

CONNECTIONS			
Function	Label	Function	Label
50-pin SCSI connector - external	J1	34-pin cable connector - floppy drive	J3
50-pin SCSI connector - internal	J2	2-pin drive active LED	LED

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í SCSI parity enabled	W3	Closed	
SCSI parity disabled	W3	Open	
í Mainboard generates edge triggered interrupt	W4	Closed	
Mainboard generates level triggered interrupt	W4	Open	
í Factory configured - do not alter	W10	Unidentified	
í Factory configured - do not alter	RP1	Unidentified	
í Factory configured - do not alter	RP2	Unidentified	
í Factory configured - do not alter	RP3	Unidentified	
í Factory configured - do not alter	RP4	Unidentified	
í Factory configured - do not alter	RP5	Unidentified	

VESA BUS CLOCK SELECTION			
Setting	W1	W2	
20MHz	Closed	Open	
25MHz	Closed	Open	
í 33MHz	Open	Closed	
40MHz	Open	Open	
50MHz	Open	Open	

Continued on next page . . .

DATA TECHNOLOGY CORPORATION
DTC3270VL

. . . continued from previous page

INTERRUPT SELECTION						
Setting	W11	W12	W13	W14	W15	W16
IRQ10	Closed	Closed	Open	Open	Open	Closed
í IRQ11	Closed	Open	Open	Open	Closed	Open
IRQ12	Open	Closed	Open	Closed	Open	Open
IRQ15	Open	Open	Closed	Open	Open	Open
Disabled	Open	Open	Open	Open	Open	Open

BIOS ADDRESS SELECTION		
Setting	W8	W9
C800h	Closed	Open
CC00h	Closed	Closed
í D800h	Open	Open
DC00h	Open	Closed

SCSI ADDRESS SELECTION			
Setting	W5	W6	W7
0	Closed	Closed	Closed
1	Closed	Closed	Open
2	Closed	Open	Closed
3	Closed	Open	Open
4	Open	Closed	Closed
5	Open	Closed	Open
6	Open	Open	Closed
í 7	Open	Open	Open

SCSI TERMINATION
The method for selecting SCSI termination is unidentified.