



High Definition Audio SoundMAX® Codec

AD1988A/AD1988B

FEATURES

Ten 192 kHz DACs

Five independent stereo DAC pairs

7.1 surround sound plus independent headphone

Independent 8 kHz, 11.025 kHz, 16 kHz, 22.05 kHz, 32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, and 192 kHz sample rates

Selectable stereo mixer on outputs

16-, 20-, and 24-bit PCM resolution

Six 192 kHz ADCs

Three independent stereo ADC pairs

Simultaneous record of up to three stereo channels

Support for quad microphone arrays plus independent capture channel

Independent 8 kHz, 11.025 kHz, 16 kHz, 22.05 kHz, 32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, and 192 kHz sample rates

16-, 20-, and 24-bit resolution

S/PDIF output

44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, and 192 kHz sample rates

16-, 20-, and 24-bit data widths

PCM, WMA/PRO, Dolby®, AC3, and DTS® formats

Digital PCM gain control

Digital PCM ADC/stream mixer

S/PDIF input

44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, and 192 kHz sample rates

16-, 20-, and 24-bit data widths

PCM, WMA/PRO, Dolby, AC3, and DTS formats

Digital PCM gain control

Auto synchronizes to source

High quality stereo CD input with GND sense

MONO_OUT pin for internal speakers or telephony

Retasking jack support

ENHANCED FEATURES

Three stereo headphone amps

AD1988A: Windows Vista™ Operating System Premium Logo compliant

95 dB outputs

90 dB audio inputs

AD1988B: Windows Vista Premium Logo compliant and Dolby Master Studio™ compliant

101 dB outputs

92 dB audio inputs

Internal 32-bit arithmetic for greater accuracy

Impedance and presence detection on all jacks

Analog PCBEEP and digital synthesis BEEP

C/LFE channel swap

Two general-purpose digital I/O (GPIO) pins

3.3 V analog and digital supplies

Reduced support components

Advanced power management modes

48-pin LQFP and LFCSP_VQ package options, Pb-free

Supports Andrea Active Noise Reduction headphones

Hardware volume control

Built-in microphone gain amps

Adjustable microphone bias pins

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 www.analog.com
Fax: 781.461.3113 ©2006 Analog Devices, Inc. All rights reserved.

AD1988A/AD1988B

TABLE OF CONTENTS

Features	1	Pin Configuration and Function Descriptions.....	8
Enhanced Features.....	1	Clarification of Output Configurations	11
Revision History	2	HD Audio Widgets.....	12
Functional Block Diagram	3	Jack Presence Detection.....	18
Specifications.....	4	HD Audio Style Jack Presence Detection	18
Test Conditions.....	4	Hardware Volume Control.....	19
Absolute Maximum Ratings.....	7	Outline Dimensions	20
Thermal Resistance	7	Ordering Guide	20
ESD Caution.....	7		

REVISION HISTORY

10/06—Revision 0: Initial Version

OBSOLETE

FUNCTIONAL BLOCK DIAGRAM

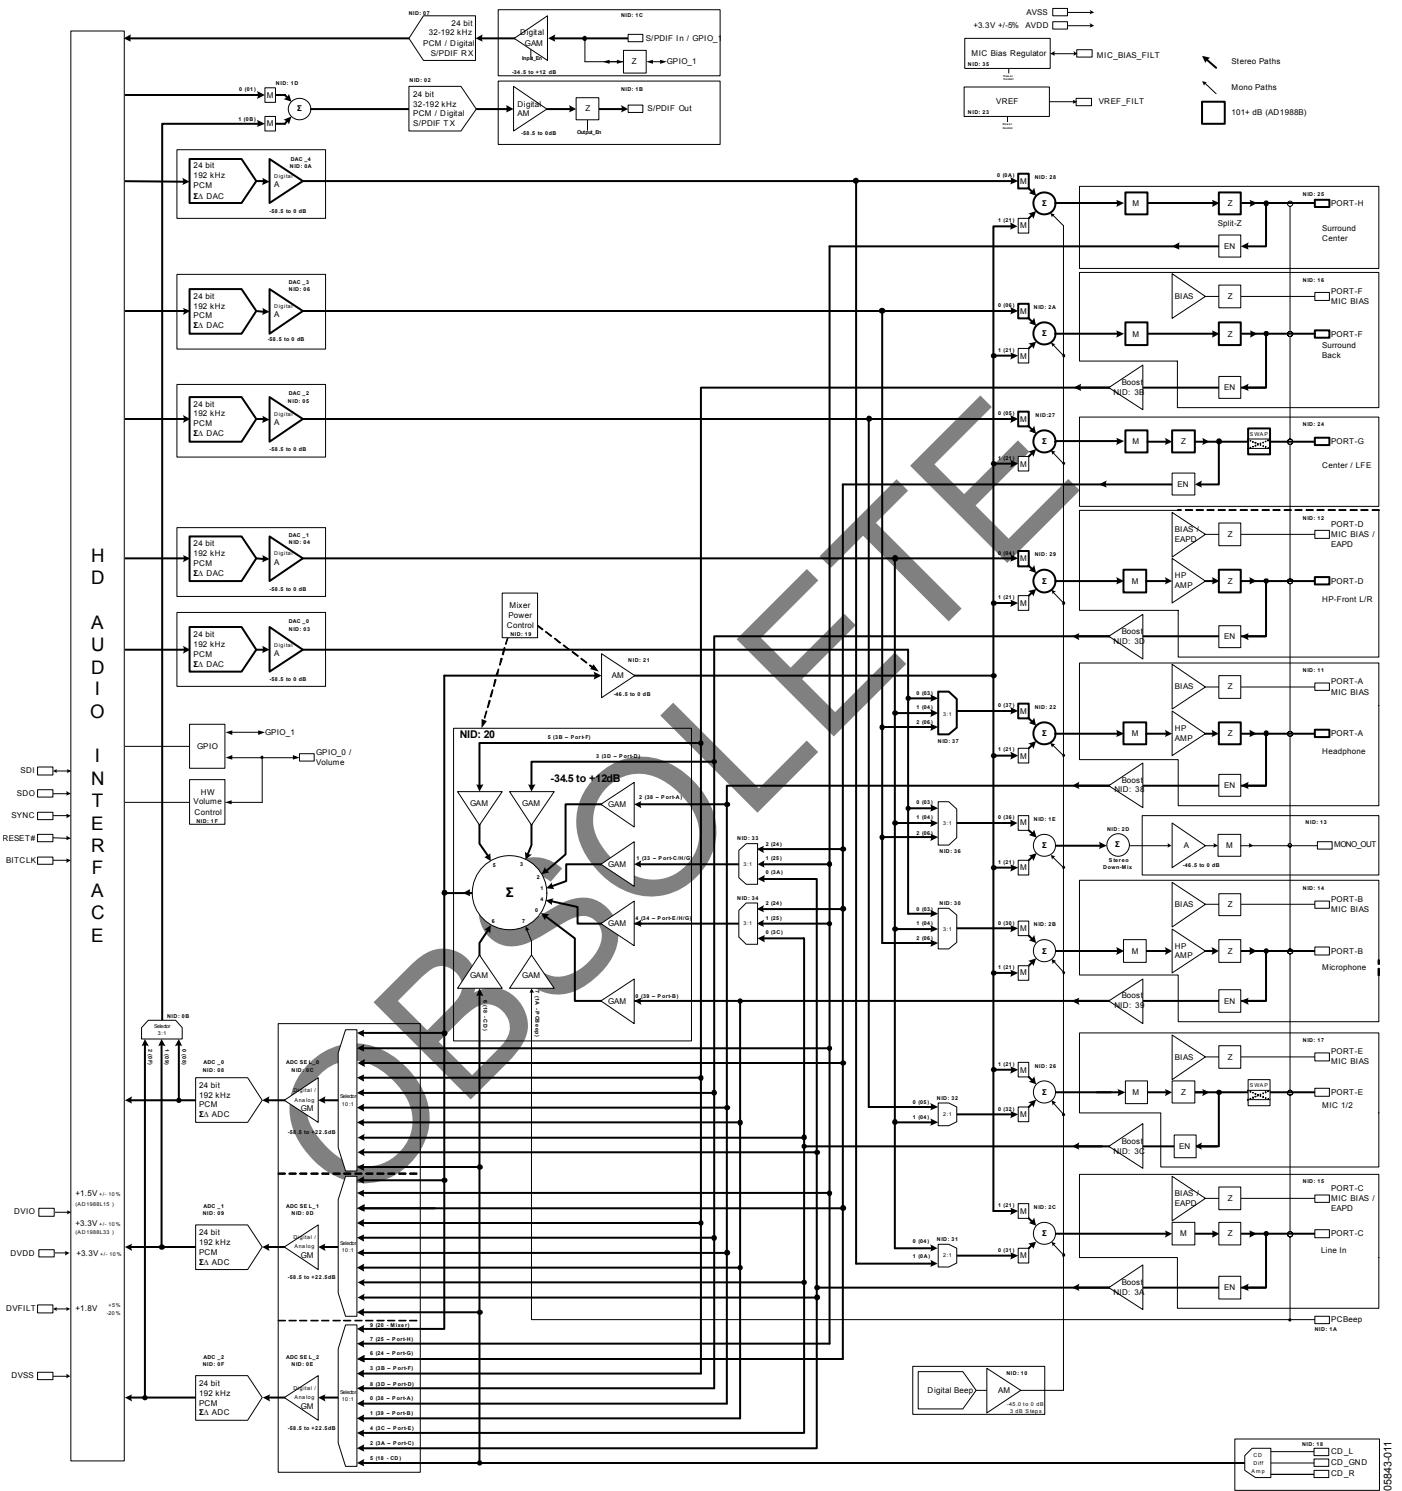


Figure 1. Block Diagram

AD1988A/AD1988B

SPECIFICATIONS

TEST CONDITIONS

Test Conditions for the AD1988A and AD1988B are as follows, unless otherwise noted.

Analog Input/Output Conditions

Temperature at 25°C
 Digital supply (DV_{DD}) at 3.3 V $\pm 10\%$
 Analog supply (AV_{DD}) at 3.3 V $\pm 5\%$
 MIC_BIAS_FILT at 5.0 V $\pm 5\%$
 Sample rate (f_s) at 48 kHz
 Input signal at 1008 Hz
 Analog output pass band at 20 Hz to 20 kHz

DAC Conditions

Calibrated
 Output -3 dB relative to full scale
 10 kΩ output load: line out tests
 32 Ω output load: headphone tests

ADC Conditions

Calibrated
 0 dB PGA gain
 Input -3.0 dB relative to full scale

Table 1.

Parameter	Conditions/Comments	Min	Typ AD1988A/ AD1988B	Max	Unit
DIGITAL DECIMATION AND INTERPOLATION FILTERS ¹	f_s 8 kHz ~ 192 kHz	0	0.40 f_s ± 0.005	0.40 f_s ± 0.005	Hz dB
Pass Band		0.60 f_s		-100	Hz dB
Pass-Band Ripple		20		20	1/ f_s
Stop Band		0		0	μs
Stop Band Rejection					
Group Delay					
Group Delay Variation over Pass Band					
ANALOG-TO-DIGITAL CONVERTERS					
Resolution ¹		24			Bits
Gain Error	Full-scale span relative to nominal input voltage		± 10		%
Interchannel Gain Mismatch	Difference of gain errors	± 0.2	± 0.5		dB
ADC Offset Error			± 5		mV
ADC Crosstalk ¹					
Line Inputs	Input L, Ground R, Read R; Input R, Ground L, Read L	-85			dB
LINE_IN to Other		-100	-80		dB
DIGITAL-TO-ANALOG CONVERTERS					
Resolution ¹		24			Bits
Gain Error	Full-scale span relative to nominal input voltage		± 10		%
Interchannel Gain Mismatch	Difference of gain errors	± 0.2	± 0.5		dB
Total Out-of-Band Energy ¹	To 100 kHz	-85			dB
DAC Crosstalk ¹	Input L, Zero R, Read R; Input R, Zero L, Read L	-95			dB
DAC VOLUMES—PROGRAMMABLE GAIN ATTENUATOR					
Step Size	DAC_0, DAC_1, DAC_2, DAC_3, DAC_4	+1.5			dB
Output Gain/Attenuation Range		-58.5	0		dB
ADC VOLUMES—PROGRAMMABLE GAIN AMPLIFIER/ATTENUATOR					
Step Size	ADCSEL_0, ADCSEL_1, ADCSEL_2	+1.5			dB
PGA Gain/Attenuation Range		-58.5	+22.5		dB
ANALOG MIXER—PROGRAMMABLE GAIN AMPLIFIER/ATTENUATOR					
Signal-to-Noise Ratio (SNR) ^{1,2}	Input to output (including CD in)	95/96			
Step Size	All mixer inputs	+1.5			dB
Input Gain/Attenuation Range	All mixer inputs	-34.5	+12.0		dB

Parameter	Conditions/Comments	Min	Typ AD1988A/ AD1988B	Max	Unit
ANALOG LINE LEVEL OUTPUTS					
Full-Scale Output Voltage PORT-C, PORT-E, PORT-F, PORT-G, PORT-H, and MONO_OUT	Line out drive enabled When ports are used as line level outputs	1.0 2.83			V rms ³ V p-p
Output Impedance ¹ External Total Load Impedance		300 10		1000	Ω kΩ
Output Capacitance ¹ External Load Capacitance ¹		15			pF pF
Total Harmonic Distortion (THD+N) ¹		–85/–85			dB
Dynamic Range ¹	–60 dB reference to f _s A-weighted	+95/+101			dB
ANALOG HP DRIVE OUTPUTS					
Full-Scale Output Voltage PORT-A, PORT-B, and PORT-D	Output drive enabled When ports are used as outputs	1.0 2.83 32		0.5	V rms ³ V p-p Ω
Output Impedance ¹ External Load Impedance ¹		15		1000	Ω pF
Output Capacitance ¹ External Load Capacitance ¹					pF pF
Total Harmonic Distortion (THD+N) ¹	10 kΩ load 32 Ω load –60 dB reference to f _s A-weighted, 10 kΩ or 32 Ω loads	–83/–84 –83/–84			dB dB
Dynamic Range ¹		+95/+101			dB
ANALOG INPUTS					
PORT-G, PORT-H, or CD	When ports are used as inputs	1 2.83			V rms ³ V p-p
Microphone Boost Amplifiers PORT-A, PORT-B, PORT-C, PORT-D, PORT-E, or PORT-F	0 dB boost +10 dB boost +20 dB boost +30 dB boost	1 2.83 0.316 0.894 0.1 0.283 0.032 0.089			V rms ³ V p-p V rms ³ V p-p V rms ³ V p-p V rms ³ V p-p
Input Impedance ¹ PCBEEP PORT-G, PORT-H All others (with 0 dB boost)		23 60 150			kΩ kΩ kΩ
Input Capacitance ¹		5	7.5		pF
ANALOG INPUT PERFORMANCE					
Total Harmonic Distortion Plus Noise (THD+N) ¹		–81/–82			dB
Dynamic Range	–60 dB in reference to f _s A-weighted	+90/+92			dB
Signal-to-Noise Ratio (SNR) ²		+90/+92			dB
STATIC DIGITAL SPECIFICATIONS					
Digital I/O (DV _{IO})	DV _{IO} @ 3.3 V ± 10%	2.97	3.3	3.63	V
V _{IH}			2.0		V
V _{IL}			0.8		V
V _{OH}			2.4		V
V _{OL}			0.6		V

AD1988A/AD1988B

Parameter	Conditions/Comments	Typ			Unit
		Min	AD1988A/ AD1988B	Max	
POWER SUPPLY					
Analog (AV _{DD})	3.3 V ± 5%	3.13	3.30	3.46	V
Power Supply Range		155/172			mW
Power Dissipation		47/52			mA
Supply Current					
Digital (DV _{DD})	3.3 V ± 10%	2.97	3.30	3.63	V
Power Supply Range		247.5/238			mW
Power Dissipation		75/75			mA
Supply Current					
Digital I/O (DV _{IO})	3.3 V ± 10%	2.97	3.30	3.63	V
Power Supply Range		3.96			mW
Power Dissipation		1.20			mA
Supply Current		80			dBV
Power Supply Rejection ¹ (AV _{DD})	100 mV p-p signal @ 1 kHz				

¹ Guaranteed, not tested.

² SNR measurement defined as "the difference in level between a reference output signal and the device output with no signal applied." This definition is taken from B. Metzler, *Audio Measurement Handbook*, 1st edition, Audio Precision, Inc., 1993, p. 165.

³ RMS values assume sine wave input.

Table 2. Power-Down States

Parameter	Comments	D-State	D _{I_{DD}} Typ	A _{I_{DD}} Typ	Unit
POWER-DOWN STATES					
FUNCTION Node		D3	21/20	1.2/1.7	mA
DAC Pair	Powered down saves (each)	D3	6/6	5/5.6	mA
ADC Pair	Powered down saves (each)	D3	5.3/5.4	3.2/3.1	mA
Mixer Power Control (and Associated Amps)	Saves	D3	0/0	2.0/2.4	mA
MIC_BIAS	Powered down saves	D3	0/0	0.5/0.5	mA
RESET	Low (active) state		2.9/2.7	3.1/3.4	mA

ABSOLUTE MAXIMUM RATINGS

Table 3.

Parameter	Rating
Digital (DV_{DD})	-0.30 V to +3.65 V
Digital I/O (DV_{IO})	-0.30 V to +3.65 V
Analog (AV_{DD})	-0.30 V to +3.65 V
Input Current (Except Supply Pins)	$\pm 10.0 \text{ mA}$
Analog Input Voltage (Signal Pins)	-0.30 V to $AV_{DD} + 0.3 \text{ V}$
Digital Input Voltage (Signal Pins)	-0.30 V to $DV_{IO} + 0.3 \text{ V}$
Ambient Temperature (Operating)	0°C to +70°C
Storage Temperature Range	-65°C to +150°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

Ambient temperature ratings are as follows:

$$T_{AMB} = T_{CASE} - (P_D \times \theta_{CA})$$

where:

T_{CASE} = case temperature in °C.

P_D = power dissipation in W.

θ_{CA} = thermal resistance (case-to-ambient).

Table 4. Thermal Resistance

Package Type	θ_{JA} ¹	θ_{JC} ²	θ_{CA} ³	Unit
LQFP	48	17	31	°C/W
LFCSP_VQ ⁴	47	15	32	°C/W

¹ θ_{JA} = thermal resistance: junction-to-ambient.

² θ_{JC} = thermal resistance: junction-to-case.

³ θ_{CA} = thermal resistance: case-to-ambient.

⁴ VQ = very thin quad.

ESD CAUTION

ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

AD1988A/AD1988B

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

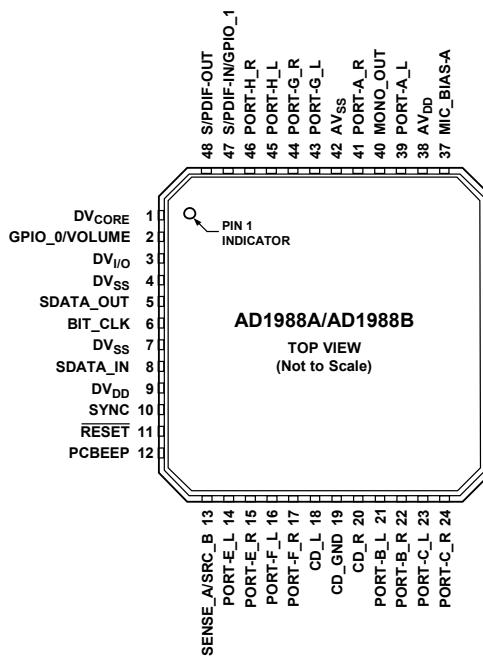


Figure 2. LFCSP_VQ Pin Configuration

06843-001

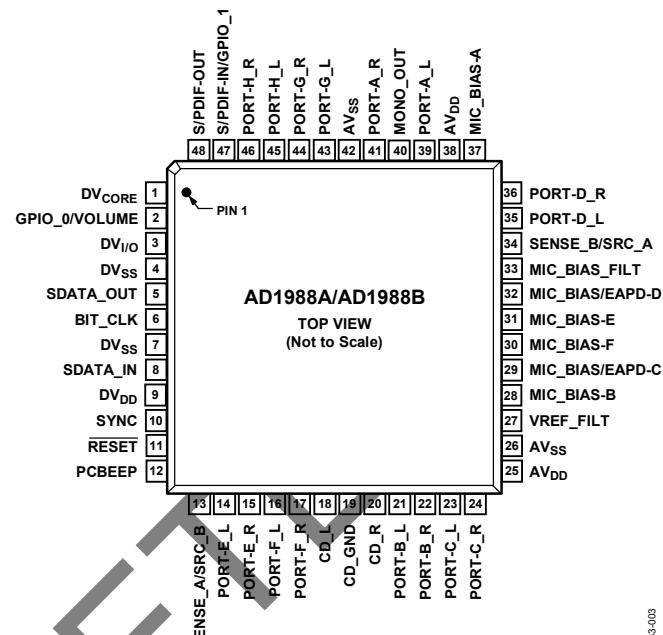


Figure 3. LFQP Pin Configuration

06843-003

Table 5. Pin Function Descriptions

Mnemonic	Pin Number	I/O	Description
DV _{CORE}	1	O	Filter Connection for Internal Core Voltage Regulator. This pin must be connected to filter capacitors: 10 µF, 1.0 µF, and 0.1 µF connected in parallel between Pin 1 and DV _{SS} (Pin 4 and Pin 7).
GPIO_0/VOLUME	2	I/O	General-Purpose Input/Output Pin (Digital I/O). Digital signal used to control external circuitry. Volume Control. When enabled, it can be used as an external volume control.
DV _{I/O}	3	I	Link Digital I/O Voltage Reference. 3.3 V (±10%).
DV _{SS}	4, 7	I	Digital Supply Return (Ground).
SDATA_OUT	5	I	Link Serial Data Output (Digital Interface). AD1988 input stream. Clocked on both edges of the BIT_CLK.
BIT_CLK	6	O	Link Bit Clock (Digital Interface). 24.000 MHz serial data clock.
SDATA_IN	8	I/O	Link Serial Data Input (Digital Interface). AD1988 output stream. Clocked only on one edge of BIT_CLK.
DV _{DD}	9	I	Digital Supply Voltage 3.3 V ± 10%. This is regulated down to 1.9 V on Pin 1 to supply the internal digital core internal to the AD1988.
SYNC	10	I	Link Frame Sync (Digital Interface). 48 kHz frame sync plus SDI stream IDs.
RESET	11	I	Link Reset (Digital Interface). AD1988 master hardware reset.
PCBEEP	12	I	Monaural Input from System for PCBEEP. Line level input.
SENSE_A/SRC_B	13	I/O	Jack Sense A to Jack Sense D Input/Sense B Drive.
PORT-E_L, PORT-E_R	14, 15	I/O	Left and Right Rear Panel Stereo Mic In/C/LFE (Analog Input/Output). Input: line level input, supports microphones with MIC_BIAS and boost amplifiers. Output: line level output.
PORT-F_L, PORT-F_R	16, 17	I/O	Left and Right Rear Panel Stereo Mic In/Surround Rear (Analog Input/Output). Input: line level input, supports microphones with MIC_BIAS and boost amplifiers. Output: line level output only.
CD_L, CD_R	18, 20	I	CD Audio Left Channel, CD Audio Right Channel.
CD_GND	19	I	CD Audio Analog Ground Reference (for Analog CD Input). Line level input only.
PORT-B_L, PORT-B_R	21, 22	I/O	Front Panel Stereo Mic In/Front Panel Headphones. Analog input/output. Input: line level input, supports microphones with MIC Bias and boost amplifiers. Output: line level output, capable of driving headphone load and power.

Mnemonic	Pin Number	I/O	Description
PORT-C_L, PORT-C_R	23, 24	I/O	Rear Panel Line-In/Surround Back Output. Analog input/output. Input: line level input, supports microphones with MIC Bias and boost amplifiers. Output: line level output only.
AV _{DD}	25, 38	I	Analog Supply Voltage. 3.3 V only. Caution: Do not apply 5.0 V to this pin. AV _{DD} supplies should be well regulated and filtered because supply noise degrades audio performance.
AV _{SS}	26, 42	I	Analog Supply Return (Ground). AV _{SS} should be connected to DV _{SS} using a conductive trace under, or close to, the AD1988A/AD1988B.
VREF_FILT	27	O	Voltage Reference Filter. This pin must be connected to filter capacitors: 1.0 μ F and 0.1 μ F connected in parallel between Pin 27 and AV _{SS} (Pin 26).
MIC_BIAS-B	28	O	Switchable Microphone Bias for PORT-B. Capable of: High-Z, 0 V, 1.65 V, 3.78 V, and 3.95 V (with 5.0 V on Pin 33). High-Z, 0 V, 1.65 V, 2.86 V, and 3.10 V (with 3.3 V on Pin 33).
MIC_BIAS-C	29	O	Switchable Microphone Bias for PORT-C. This pin has the same function as MIC_BIAS-B.
MIC_BIAS-F	30	O	Switchable Microphone Bias for PORT-F. This pin has the same function as MIC_BIAS-B.
MIC_BIAS-E	31	O	Switchable Microphone Bias for PORT-E. This pin has the same function as MIC_BIAS-B.
MIC_BIAS-D	32	O	Switchable Microphone Bias for PORT-D. This pin has the same function as MIC_BIAS-B.
MIC_BIAS_FILT	33	I	Filter for Microphone Bias Boost Circuitry. Connect this pin to 5.0 V via a low-pass filter. When connected in this way, the AD1988A/AD1988B are each capable of providing 3.95 V as a microphone bias to all of the MIC_BIAS pins. If 5 V is not available, connect this pin to 3.3 V (AV _{DD}) via a low-pass filter. The AD1988A/AD1988B produce a MIC_BIAS voltage relative to the AV _{DD} supply (typically 3.1 V @ AV _{DD} = 3.3 V).
SENSE_B/SRC_A	34	I/O	Jack Sense E to Jack Sense H Input/Sense A Drive.
PORT-D_L, PORT-D_R	35, 36	I/O	Left and Right Rear Panel Headphone (Front Line Out)/Stereo MIC In. Analog input/output. Input: line level input, supports microphones with MIC_BIAS and boost amplifiers. Output: line level output, capable of driving headphone load and power.
MIC_BIAS-A	37	O	Switchable Microphone Bias for PORT-A. This pin has the same function as MIC_BIAS-B.
PORT-A_L, PORT-A_R	39, 41	I/O	Left and Right Front Panel Headphone Output/Stereo MIC In. Analog input/output. Input: line level input, supports microphones with MIC_BIAS and boost amplifiers. Output: line level output, capable of driving headphone load and power.
MONO_OUT	40	O	Monaural Output to Internal Speaker or Telephony Subsystem. Line level output only.
PORT-G_L, PORT-G_R	43, 44	O	Left and Right Rear Panel C/LFE Output/Line Input. Input: line level input. Output: line level output.
PORT-H_L, PORT-H_R	45, 46	O	Left and Right Rear Panel Surround Center/Side Output/Line Input. Analog input/output. Input: line level input. Output: line level output.
S/PDIF_IN/GPIO_1	47	I/O	S/PDIF_IN/GPIO Pin. S/PDIF_IN supports S/PDIF input. When enabled, GPIO_1 can be used as a GPIO pin.
S/PDIF_OUT	48	O	S/PDIF_OUT. Supports S/PDIF output.

AD1988A/AD1988B

Table 6. Pins Grouped by Function

Function	Pin No.	Mnemonic
Digital Interface	5 6 8 10 11	SDATA_OUT BIT_CLK SDATA_IN SYNC RESET
Digital Input/Output	48 47 2	S/PDIF_OUT S/PDIF_IN/GPIO_1 GPIO_0/VOLUME
Jack Sense	13 34	SENSE_A/SRC_B SENSE_B/SRC_A
Filter/Reference	1 27 33	DV _{CORE} VREF_FILT MIC_BIAS_FILT
Microphone Bias	28 29 30 31 32 37	MIC_BIAS-B MIC_BIAS-C MIC_BIAS-F MIC_BIAS-E MIC_BIAS-D MIC_BIAS-A
Power and Ground	9 3 4, 7 25, 38 26, 42	DV _{DD} DV _{IO} DV _{SS} AV _{DD} AV _{SS}
Analog Input/Output	12 14 15 16 17 18 20 21 22 23 24 35 36 39 40 41 43 44 45 46	PCBEEP PORT-E_L PORT-E_R PORT-F_L PORT-F_R CD_L CD_R PORT-B_L PORT-B_R PORT-C_L PORT-C_R PORT-D_L PORT-D_R PORT-A_L MONO_OUT PORT-A_R PORT-G_L PORT-G_R PORT-H_L PORT-H_R

CLARIFICATION OF OUTPUT CONFIGURATIONS

DAC, ADC, and port assignments are arbitrary; however, ports are optimized for certain configurations. Use the guidelines in Table 7, Table 8, and Table 9 when selecting ports for particular functions. Note the following for each of these tables:

- HP is the output capable of driving headphone load and power
- MIC is input that supports microphones with MIC Bias and boost amplifiers
- LO is the line level output
- LI is the line level input

In desktop applications with discreet jacks (the default configuration), assign the ports as listed in Table 7.

Table 7. Discreet Jacks (Default Configuration)

Port	Function	HP	MIC	LO	LI
POR-T-A	Front Panel Headphone	x	x	x	x
POR-T-B	Front Panel Microphone	x	x	x	x
POR-T-C	Rear Panel Line-In		x	x	x
POR-T-D	Rear Panel Front/Headphone	x	x	x	x
POR-T-E	Rear Panel Microphone	x	x	x	
POR-T-F	Rear Panel Surround-Rear (5.1)		x	x	
POR-T-G	Rear Panel C/LFE		x	x	
POR-T-H	Rear Panel Surround-Center/Side (7.1)		x	x	
MONO_OUT	Internal Mono Speaker (use GPIO as EAPD)			x	

In desktop applications with shared input/5.1 jacks, assign the ports as listed in Table 8.

Table 8. Shared Input/5.1 Jacks

Port	Function	HP	MIC	LO	LI
POR-T-A	Front Panel Headphone	x	x	x	x
POR-T-B	Front Panel Microphone	x	x	x	x
POR-T-C	Rear Panel Line-In/Surround-Rear (5.1)		x	x	x
POR-T-D	Rear Panel Front/Headphone	x	x	x	x
POR-T-E	Rear Panel Microphone/C/LFE		x	x	x
MONO_OUT	Internal Mono Speaker (use GPIO as EAPD)			x	

In notebook applications, to support fully retasking jacks, assign the ports as listed in Table 9.

Table 9.

Port	Function	HP	MIC	LO	LI
POR-T-A	Headphone Jack	x	x	x	x
POR-T-B	Microphone Jack	x	x	x	x
POR-T-D	Line-In Jack	x	x	x	x
POR-T-C	Internal Stereo Speakers (use GPIO as EAPD)		x	x	x
POR-T-E/POR-T-F	Internal Quad Microphone Array (Optional)		x	x	x

AD1988A/AD1988B

HD AUDIO WIDGETS

Table 10.

Node ID	Name	Type	Description
00	ROOT	Root	Device identification
01	FUNCTION	Function	Designates this device as an audio codec
02	S/PDIF DAC	Audio output	S/PDIF digital stream output interface
03	DAC_0	Audio output	Stereo headphone channel digital/audio converters
04	DAC_1	Audio output	Stereo front channel digital/audio converters
05	DAC_2	Audio output	Stereo C/LFE channel digital/audio converters
06	DAC_3	Audio output	Stereo surround-back (5.1) channel digital/audio converters
07	S/PDIF ADC	Audio input	S/PDIF digital stream input interface
08	ADC_0	Audio input	Stereo record Channel 0 audio/digital converters
09	ADC_1	Audio input	Stereo record Channel 1 audio/digital converters
0A	DAC_4	Audio output	Stereo surround-side (7.1) channel digital/audio converters
0B	S/PDIF Mix Selector	Audio selector	Selects the ADC to drive the S/PDIF mixer
0C	ADC Selector 0	Audio selector	Selects and amplifies/attenuates the input to ADC_0
0D	ADC Selector 1	Audio selector	Selects and amplifies/attenuates the input to ADC_1
0E	ADC Selector 2	Audio selector	Selects and amplifies/attenuates the input to ADC_2
0F	ADC_2	Audio input	Stereo record Channel 2 audio/digital converters
10	Digital Beep	Beep generator	Internal digital PCBEEP signal
11	PORT-A	Pin complex	Front panel headphone jack
12	PORT-D	Pin complex	Rear panel front speaker jack
13	MONO_OUT	Pin complex	Monaural output pin (internal speakers or telephony system)
14	PORT-B	Pin complex	Front panel microphone jack
15	PORT-C	Pin complex	Rear panel line-in jack
16	PORT-F	Pin complex	Rear panel surround-back (5.1) jack
17	PORT-E	Pin complex	Rear panel microphone jack
18	CD IN	Pin complex	Analog CD input
19	Mixer Power-Down	Power widget	Powers down the analog mixer and associated amps
1A	Analog PCBEEP	Pin complex	External analog PCBEEP signal input
1B	S/PDIF Out	Pin complex	S/PDIF output pin
1C	S/PDIF In	Pin complex	S/PDIF input pin
1D	S/PDIF Mixer	Audio mixer	Mixes the selected ADC with the digital stream to drive S/PDIF out
1E	MONO_OUT Mixer	Audio mixer	Selects the source that drives the MONO_OUT signal
1F	Volume Knob	Vendor defined	Hardware volume knob
20	Analog Mixer	Audio mixer	Mixes individual gain analog inputs
21	Mixer Output Attenuator	Audio selector	Attenuates the mixer output to drive the port mixers
22	PORT-A Mixer	Audio mixer	Mixes the DAC_0 and mixer output amps to drive PORT-A
23	VREF Power-Down	Vendor defined	Powers down the internal and external VREF circuitry
24	PORT-G	Pin complex	Rear panel C/LFE jack
25	PORT-H	Pin complex	Rear panel surround-side (7.1) jack
26	PORT-E Mixer	Audio mixer	Mixes the PORT-E selected DAC and mixer output amps to drive PORT-E
27	PORT-G Mixer	Audio mixer	Mixes the DAC_3 and mixer output amps to drive PORT-G
28	PORT-H Mixer	Audio mixer	Mixes the DAC_4 and mixer output amps to drive PORT-H
29	PORT-D Mixer	Audio mixer	Mixes the DAC_1 and mixer output amps to drive PORT-D
2A	PORT-F Mixer	Audio mixer	Mixes the DAC_2 and mixer output amps to drive PORT-F
2B	PORT-B Mixer	Audio mixer	Mixes the PORT-B selected DAC and mixer output amps to drive PORT-B
2C	PORT-C Mixer	Audio mixer	Mixes the PORT-C selected DAC and mixer output amps to drive PORT-C
2D	Stereo Mix-Down	Audio mixer	Mixes the stereo L/R channels to drive MONO_OUT
2F	BIAS Power-Down	Vendor defined	Powers down the internal MIC_BIAS_FILT and all MIC_BIAS pins
30	PORT-B Out Selector	Audio selector	Selects DAC_0, DAC_1, and DAC_3 for PORT-B
31	PORT-C Out Selector	Audio selector	Selects DAC_2 and DAC_4 for PORT-C
32	PORT-E Out Selector	Audio selector	Selects DAC_2 and DAC_4 for PORT-E
33	PORT-C In Selector	Audio selector	Selects from the PORT-C, PORT-G, and PORT-H inputs to the mixer input

Node ID	Name	Type	Description
34	PORTE In Selector	Audio selector	Selects from the PORT-E, PORT-G, and PORT-H inputs to the mixer input
36	MONO_OUT Selector	Audio selector	Selects DAC_0, DAC_1, and DAC_3 for MONO_OUT
37	PORT-A Out Selector	Audio selector	Selects DAC_0, DAC_1, and DAC_3 for PORT-A
38	PORT-A Boost	Audio selector	Microphone boost amp for PORT-A
39	PORT-B Boost	Audio selector	Microphone boost amp for PORT-B
3A	PORT-C Boost	Audio selector	Microphone boost amp for PORT-C
3B	PORT-F Boost	Audio selector	Microphone boost amp for PORT-F
3C	PORT-E Boost	Audio selector	Microphone boost amp for PORT-E
3D	PORT-D Boost	Audio selector	Microphone boost amp for PORT-D

Table 11. AD1988A Device Root and Function Node Parameters

Node ID	Name	Vendor ID 0x00	Revision ID¹ 0x02	Sub Node Count 0x04	Function Group Type 0x05	Audio Function Group Capabilities 0x08	GPIO Capabilities 0x11
00	ROOT	11D41988	00100400	00010001			
01	FUNCTION			0002003C	00000001	00010C0C	40000002

¹ Silicon revision number may change without prior notice. Number shown is current at the publication date of this document.

Table 12. AD1988B Device Root and Function Node Parameters

Node ID	Name	Vendor ID 0x00	Revision ID¹ 0x02	Sub Node Count 0x04	Function Group Type 0x05	Audio Function Group Capabilities 0x08	GPIO Capabilities 0x11
00	ROOT	11D4198B	00100300	00010001			
01	FUNCTION			0002003C	00000001	00010C0C	40000002

¹ Silicon revision number may change without prior notice. Number shown is current at the publication date of this document.

AD1988A/AD1988B

Table 13. Widget Parameters

Node ID	Type ID	Widget Capabilities	PCM Size, Rate	Stream Formats	Pin Capabilities	Input Amp Capabilities	Con. List Length	Power States	Output Amp Capabilities	Volume Knob Capabilities
		09	0A	0B	0C	0D	0E	0F	12	13
01	X	000004C0	000E07FF	00000001		80000000		00000009	00052727	
02	0	00030311	000E07E0	00000005			00000001			
03	0	00000405	000E07FF	00000001			00000000	00000009	00052727	
04	0	00000405	000E07FF	00000001			00000000	00000009	00052727	
05	0	00000405	000E07FF	00000001			00000000	00000009	00052727	
06	0	00000405	000E07FF	00000001			00000000	00000009	00052727	
07	1	00130391	000E07E0	00000005			00000001			
08	1	00100501	000E07FF	00000001			00000001	00000009		
09	1	00100501	000E07FF	00000001			00000001	00000009		
0A	0	00000405	000E07FF	00000001			00000000	00000009	00052727	
0B	3	00300301					00000003			
0C	3	0030010D					00000007		80053627	
0D	3	0030010D					00000007		80053627	
0E	3	0030010D					00000007		80053627	
0F	1	00100501	000E07FF	00000001			00000001	00000009		
10	7	0070000C					00000000		800B0F0F	
11	4	0040018D		0000373F			00000001		80000000	
12	4	0040018D		0000373F			00000001		80000000	
13	4	0040010C		00000010			00000001		80051F1F	
14	4	0040018D		0000373F			00000001		80000000	
15	4	0040018D		00003737			00000001		80000000	
16	4	0040018D		00003737			00000001		80000000	
17	4	0040098D		00003737			00000001		80000000	
18	4	00400001		00000020			00000000			
19	5	00500500					00000002	00000009		
1A	4	00400000		00000020			00000000			
1B	4	0040030D		00000010			00000001		80052727	
1C	4	0040020B		00000020	80051F17	00000000				
1D	2	00200303				80000000	00000002			
1E	2	00200103				80000000	00000002			
1F	6	00600080					00000000		000000BF	
20	2	0020010B			80051F17	00000008				
21	3	0030010D					00000001		80051F1F	
22	2	00200103			80000000	00000002				
23	F	00F00100					00000008			
24	4	0040098D		00000037			00000001		80000000	
25	4	0040018D		00000037			00000001		80000000	
26	2	00200103			80000000	00000002				
27	2	00200103			80000000	00000002				
28	2	00200103			80000000	00000002				
29	2	00200103			80000000	00000002				
2A	2	00200103			80000000	00000002				
2B	2	00200103			80000000	00000002				
2C	2	00200103			80000000	00000002				
2D	2	00200100				00000001				
2F	F	00F00100				00000006				
30	3	00300101				00000003				
31	3	00300101				00000002				

Node ID	Type ID	Widget Capabilities	PCM Size, Rate	Stream Formats	Pin Capabilities	Input Amp Capabilities	Con. List Length	Power States	Output Amp Capabilities	Volume Knob Capabilities
		09	0A	0B	0C	0D	0E	0F	12	13
32	3	00300101					00000002			
33	3	00300101					00000003			
34	3	00300101					00000003			
36	3	00300101					00000003			
37	3	00300101					00000003			
38	3	0030010D					00000001		00270300	
39	3	0030010D					00000001		00270300	
3A	3	0030010D					00000001		00270300	
3B	3	0030010D					00000001		00270300	
3C	3	0030010D					00000001		00270300	
3D	3	0030010D					00000001		00270300	

OBSOLETE

AD1988A/AD1988B

Table 14. Connection List

Node	Connections		Length	0		1		2		3		4		5		6		7	
	ID	0 to 3	4 to 7	NID	I	NID													
02	0000001D			1	1D														
03				0															
04				0															
05				0															
06				0															
07	0000001C			1	1C														
08	0000000C			1	0C														
09	0000000D			1	0D														
0A				0															
0B	000F0908			3	08		09		0F										
0C	2418BC38	00203D25		7	38	1	3C		18		24		25		3D		20		
0D	2418BC38	00203D25		7	38	1	3C		18		24		25		3D		20		
0E	2418BC38	00203D25		7	38	1	3C		18		24		25		3D		20		
0F	0000000E			1	0E														
10				0															
11	00000022			1	22														
12	00000029			1	29														
13	0000002D			1	2D														
14	0000002B			1	2B														
15	0000002C			1	2C														
16	0000002A			1	2A														
17	00000026			1	26														
18				0															
19	00002120			2	20		21												
1A				0															
1B	00000002			1	02														
1C				0															
1D	00000B01			2	01		0B												
1E	00002136			2	36		21												
1F				0															
20	3D383339	1A183B34		8	39		33		38		3D		34		3B		18		
21	00000020			1	20														
22	00002137			2	37		21												
23	25249811	2120BD38		8	11	1	18		24		25		38	1	3D		20		
24	00000027			1	27														
25	00000028			1	28														
26	00002132			2	32		21												
27	00002105			2	05		21												
28	0000210A			2	0A		21												
29	00002104			2	04		21												
2A	00002106			2	06		21												
2B	00002130			2	30		21												
2C	00002131			2	31		21												
2D	0000001E			1	1E														
2F	15141211	00001716		6	11		12		14		15		16		17				
30	00060403			3	03		04		06										
31	00000A04			2	04		0A												
32	00000405			2	05		04												
33	0024253A			3	3A		25		24										
34	0024253C			3	3C		25		24										

Node	Connections			0	1	2	3	4	5	6	7	
	ID	0 to 3	4 to 7	Length	NID	I	NID	I	NID	I	NID	I
36	00060403			3	03		04		06			
37	00060403			3	03		04		06			
38	00000011			1		11						
39	00000014			1		14						
3A	00000015			1		15						
3B	00000016			1		16						
3C	00000017			1		17						
3D	00000012			1		12						

Table 15. Default Configuration Bytes¹

Node ID	MSB	31	29	27	23	19	15	8	7	3
	LSB	30	28	24	20	16	12	8	4	0
	Value	Connectivity	Location		Default Device	Conn Type	Color	Misc JD Ovrrd	Def Assn	Seq
11	02214030	Jack	External	Front	HP out	1/8" jack	Green	0	3	0
12	01014010	Jack	External	Rear	Line out	1/8" jack	Green	0	1	0
13	9913011F	Fixed	Internal	Special 3	Speaker	ATAPI	Unknown	1	1	F
14	02A19040	Jack	External	Front	Mic in	1/8" jack	Pink	0	4	0
15	01813021	Jack	External	Rear	Line in	1/8" jack	Blue	0	2	1
16	01011012	Jack	External	Rear	Line out	1/8" jack	Black	0	1	2
17	01A19020	Jack	External	Rear	Mic in	1/8" jack	Pink	0	2	0
18	9933012E	Fixed	Internal	Special 3	CD	ATAPI	Unknown	1	2	E
1A	99F301F0	Fixed	Internal	Special 3	Other	ATAPI	Unknown	1	F	0
1B	014511F0	Jack	External	Rear	S/PDIF out	Optical	Black	1	F	0
1C	01C511F0	Jack	External	Rear	S/PDIF in	Optical	Black	1	F	0
24	01016011	Jack	External	Rear	Line out	1/8" jack	Orange	0	1	1
25	01012014	Jack	External	Rear	Line out	1/8" jack	Gray	0	1	4

¹ Default configuration values are set on codec power-up only. To preserve modifications by BIOS control, default configuration values do not change by reset operations.

JACK PRESENCE DETECTION

HD AUDIO STYLE JACK PRESENCE DETECTION

The AD1988 uses two jack sense pins for presence detection on up to eight audio jacks. This, combined with the device identification engine, enables software to determine if there is a device plugged into the circuit, and the type of device it is. Allowing software to configure jacks and amplifiers, as necessary, ensures proper audio operation.

Detect jack presence by using a resistor tree arrangement detailed by the HD audio specification, allowing up to four jacks per sense line. Jacks must have normally open, isolated switches to use this method of jack presence detection.

For proper operation, there must be a $2.67\text{ k}\Omega$ 1% resistor connected between SENSE_A and AV_{DD}, and another $2.67\text{ k}\Omega$ 1% resistor between SENSE_B and AV_{DD}.

The specific resistor values for each jack are listed in Table 16. Use 1% tolerance resistors to ensure accurate detection.

Table 16. Jack Sense Mapping

Resistor Value (1% Tolerance)	SENSE_A			SENSE_B		
	Name	Port	Node ID	Name	Port	Node ID
2.67 kΩ	Pull-up to AV _{DD}			Pull-up to AV _{DD}		
5.10 kΩ	FRONT	D	0x12	SURR_SIDE (7.1)	H	0x25
10.0 kΩ	LINE IN	C	0x15	C/LFE	G	0x24
20.0 kΩ	FRONT_MIC	B	0x14	SURR_BACK (5.1)	F	0x16
39.2 kΩ	HP_OUT	A	0x11	REAR_MIC	E	0x17

HARDWARE VOLUME CONTROL

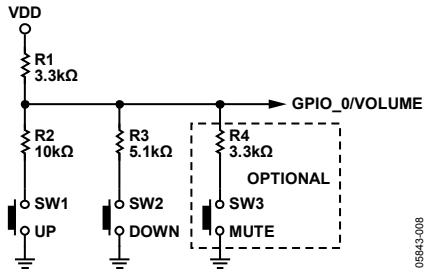


Figure 4. Volume Control Circuitry

The AD1988A/AD1988B support external volume control on Pin 2 (GPIO_0/VOLUME). The circuit diagram in Figure 4 allows up/down/mute control using only three switches and four resistors external to the codec. The up/down switches can also be replaced by a center-position-off SPDT toggle switch. The mute switch is optional, but desirable, for a satisfactory user interface.


To use the GPIO_0/VOLUME pin (Pin 2) as a GPIO pin, it is recommended to pull it down using a 10 k Ω resistor (Pin 2 to DV_{SS}). In the GPIO configuration, the volume control widget has no effect.

When the GPIO_0/VOLUME pin (Pin 2) is used as a volume control, pull-up Pin 2 to AV_{DD}. The volume control widget operates the codec volumes only under software control. If one of the buttons is pressed, the control volume setting is incremented (up), decremented (down), or set Bit 7 (mute). The volume control supports 40 steps (other than mute) and uses a range of 0 (0x00, minimum volume) to 63 (0x3F, maximum volume). Pressing the mute switch (or both up and down simultaneously) toggles Bit 7 which indicates mute on/off.

OBSOLETE

AD1988A/AD1988B


OUTLINE DIMENSIONS

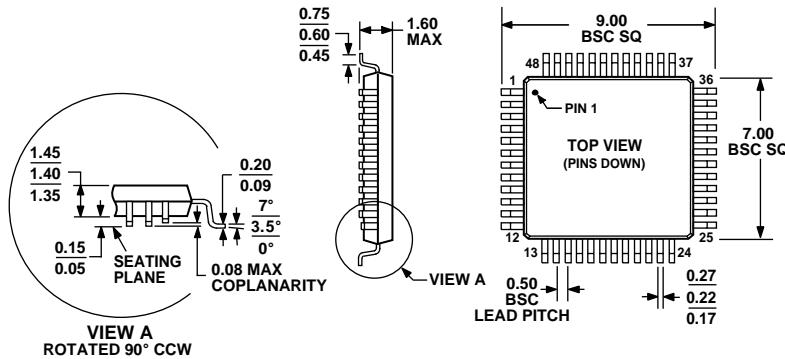

COMPLIANT TO JEDEC STANDARDS MS-026-BBC

Figure 5. 48-Lead Low Profile Quad Flat Package [LQFP]
(ST-48)

Dimension shown in millimeters

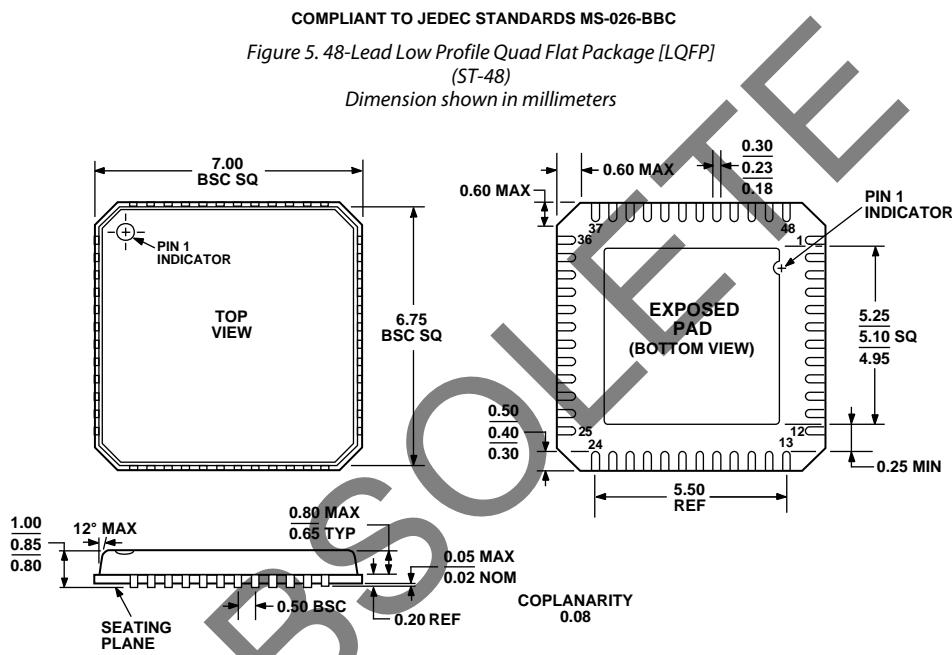

COMPLIANT TO JEDEC STANDARDS MO-220-VKDD-2

Figure 6. 48-Lead Lead Frame Chip Scale Package [LFCSP_VQ]
7 mm × 7 mm Body, Very Thin Quad
(CP-48-1)

Dimension shown in millimeters

ORDERING GUIDE

Model	Audio Output Performance	Temperature Range	Package Description	Package Option
AD1988AJSTZ ¹	95 dB	0°C to 70°C	48-Lead LQFP, Tray	ST-48
AD1988AJSTZ-RL ¹	95 dB	0°C to 70°C	48-Lead LQFP, Reel	ST-48
AD1988AJCPZ ¹	95 dB	0°C to 70°C	48-Lead LFCSP_VQ, Tray	CP-48-1
AD1988AJCPZ-RL ¹	95 dB	0°C to 70°C	48-Lead LFCSP_VQ, Reel	CP-48-1
AD1988BJSTZ ¹	101 dB	0°C to 70°C	48-Lead LQFP, Tray	ST-48
AD1988BJSTZ-RL ¹	101 dB	0°C to 70°C	48-Lead LQFP, Reel	ST-48
AD1988BJCPZ ¹	101 dB	0°C to 70°C	48-Lead LFCSP_VQ, Tray	CP-48-1
AD1988BJCPZ-RL ¹	101 dB	0°C to 70°C	48-Lead LFCSP_VQ, Reel	CP-48-1

¹Z = Pb-free part.

Dolby and Dolby Master Studio are trademarks of Dolby Laboratories. DTS is a trademark of DTS, Inc. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.