


MEDIA VISION TECHNOLOGY, INC. DOUBLE FUSION LX LSMI (650-0082-03)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Game/MIDI port, microphone in, stereo line in, stereo line out, audio in, LMSI connector
Data Bus	16-bit ISA

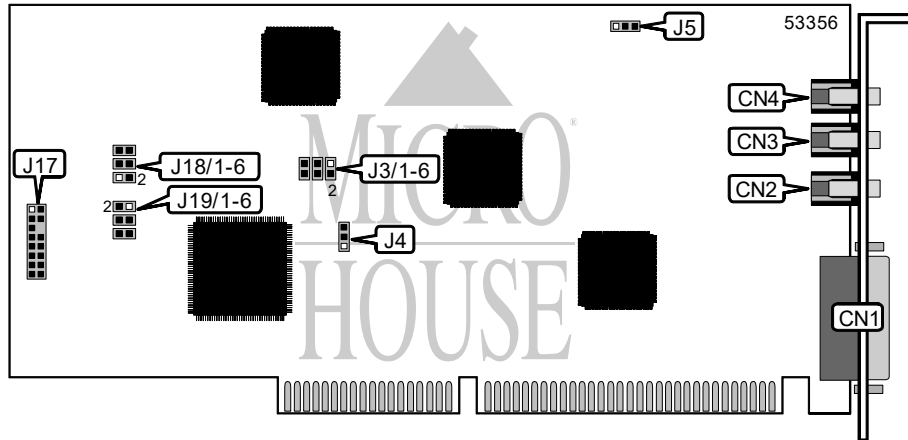

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	Stereo line in	CN4
Microphone in	CN2	Audio in - CD-ROM	J5
Stereo line out	CN3	15-pin LMSI connector	J17

USER CONFIGURABLE SETTINGS		
Function	Label	Position
i DMA sharing	J4	Pins 1 & 2 closed
Note: The default DMA sharing connector has pins 1 & 2 closed but it is unknown whether this enables or disables DMA sharing.		

CD-ROM I/O ADDRESS SELECTION			
Setting	J18/pins 1 & 2	J18/pins 3 & 4	J18/pins 5 & 6
300	Closed	Closed	Closed
310	Closed	Closed	Open
320	Closed	Open	Closed
330	Closed	Open	Open
i 340	Open	Closed	Closed
350	Open	Closed	Open
360	Open	Open	Closed
370	Open	Open	Open

Continued on next page . . .

MEDIA VISION TECHNOLOGY, INC.
 DOUBLE FUSION LX LSMI (650-0082-03)

. . . continued from previous page

BOARD ID SELECTION			
Setting	J3/pins 1 & 2	J3/pins 3 & 4	J3/pins 5 & 6
0	Open	Open	Open
1	Closed	Open	Open
2	Open	Closed	Open
3	Closed	Closed	Open
4	Open	Open	Closed
Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings.			

CD-ROM INTERRUPT SELECTION			
Setting	J19/pins 1 & 2	J19/pins 3 & 4	J19/pins 5 & 6
IRQ11	Closed	Open	Open
IRQ12	Open	Closed	Open
IRQ15	Open	Open	Closed