


# DTK COMPUTER, INC.

## P T M - 1 2 3 0 C

<b>Processor</b>	80286
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	VLSI/VTI
<b>Max. Onboard DRAM</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	DTK
<b>Dimensions</b>	341.6mm x 204.2mm
<b>I/O Options</b>	Parallel port, serial ports (2)
<b>NPU Options</b>	80287

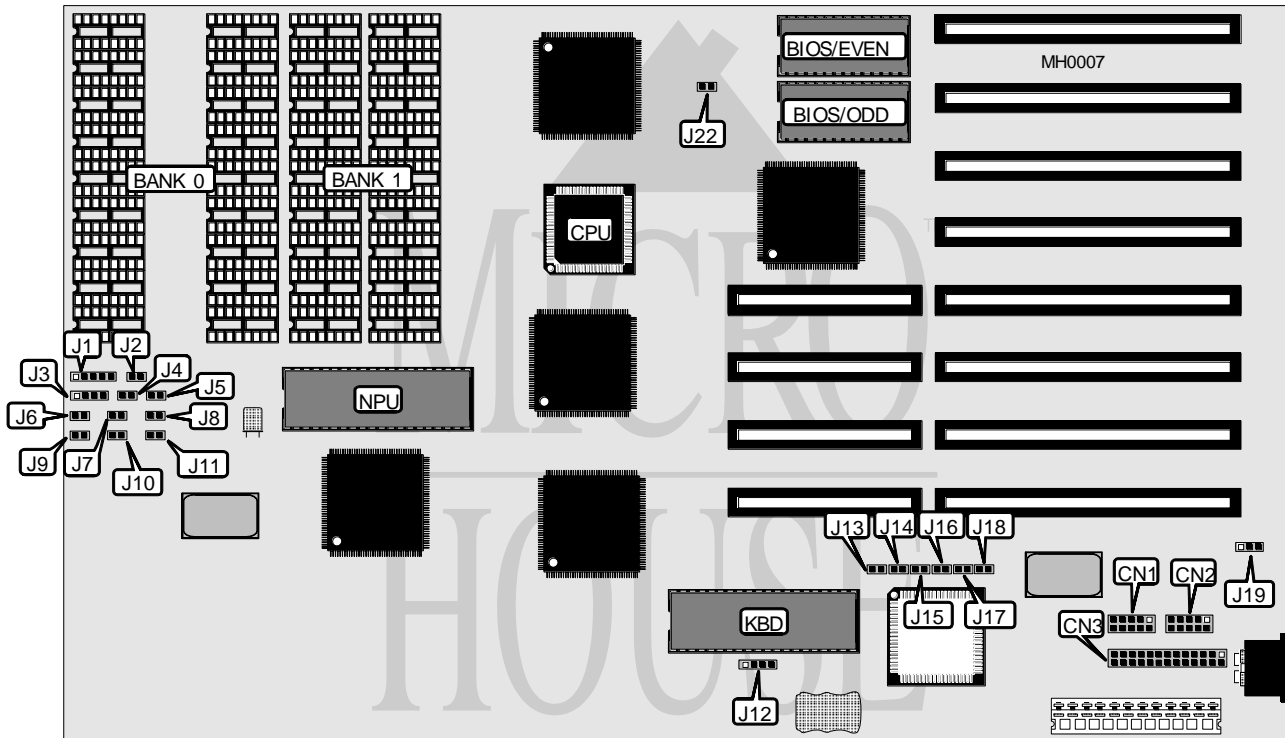

CONNECTIONS				
Purpose	Location	Purpose	Location	
Power LED & keylock	J1	External battery	J12	
Reset switch	J2	Serial port (COM2)	CN1	
Speaker	J3	Serial port (COM1)	CN2	
Turbo LED	J4	Parallel port	CN3	
Turbo switch	J5			

Continued on next page . . .

**DTK COMPUTER, INC.**  
**P T M - 1 2 3 0 C**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í DRAM speed select 0 wait states	J6	Closed
DRAM speed select 1 wait state	J6	Open
í Factory configured - do not alter	J7	Unknown
í Factory configured - do not alter	J10	N/A
í Monitor type select color	J11	Closed
Monitor type select monochrome	J11	Open
í BIOS type select 27256	J22	Closed
BIOS type select 27128	J22	Open
í CMOS memory normal operation	JP1	Closed
CMOS memory clear	JP1	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION		
Size	J8	J9
512KB	Closed	Closed
640KB	Closed	Open
1MB	Open	Closed

PARALLEL PORT (CN3) CONFIGURATION			
Port	J13	J14	J19
LPT1	Closed	Closed	pins 1 & 2 closed
LPT2	Open	Open	pins 2 & 3 closed
Disabled	Open	Closed	N/A
Disabled	Closed	Open	N/A

SERIAL PORT CONFIGURATION					
Serial Port 1 (CN2)	J15	J16	Serial Port 2 (CN1)	J17	J18
COM1	Closed	Closed	COM2	Closed	Closed
COM3	Open	Open	COM4	Open	Open
Disabled	Closed	Open	Disabled	Closed	Open
Disabled	Open	Closed	Disabled	Open	Closed