


DATA TECHNOLOGY CORPORATION DTC3250

Q2/92

Data bus: 8-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Up to seven SCSI devices
 Floppy drives supported: Three 360KB or 720KB

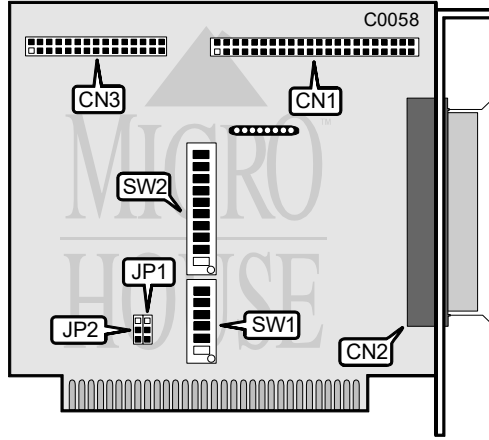

CONNECTIONS	
Function	Location
50-pin SCSI connector-internal	CN1
50-pin SCSI connector-external	CN2
34-pin data cable connector-floppy drive	CN3

BIOS ADDRESS		
Address	SW2/switch 5	SW2/switch 6
í D800h	off	off
DC00h	on	off
C800h	off	on
CC00h	on	on

Continued on next page . . .

**DATA TECHNOLOGY CORPORATION
DTC3250**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy port address 3F2-3F7h	JP1	pins 1 & 2 closed
Floppy port address 372-377h	JP1	pins 2 & 3 closed
í Normal operation	JP2	pins 2 & 3 closed
Factory test enabled	JP2	pins 1 & 2 closed
í SCSI parity check disabled	SW1/switch 3	on
SCSI parity check enabled	SW1/switch 3	off
í Dual-speed floppy supported	SW2/switch 7	on
Single-speed floppy supported	SW2/switch 7	off
í PS/2-type floppy on Drive Select 2 not supported	SW2/switch 8	on
PS/2-type floppy drive on Drive Select 2 supported	SW2/switch 8	off
í Floppy drive disabled	SW2/switch 9	off
Floppy drive enabled	SW2/switch 9	on
í Normal operation mode	SW2/switch 10	off
Factory test enabled	SW2/switch 10	on

INTERRUPT REQUEST SWITCHES - SW1 AND SW2						
#	INTERRUPT "A"		INQUIRY INTERRUPT "B"			
	SW1/1	SW1/2	SW2/1	SW2/2	SW2/3	SW2/4
4	on	on	off	off	off	on
5	off	on	off	off	on	off
6	on	off	off	on	off	off
í 7	off	off	on	off	off	off

SCSI ADDRESS			
SCSI ID	SW1/switch 4	SW1/switch 5	SW1/switch 6
0	on	on	on
1	off	on	on
2	on	off	on
3	off	off	on
4	on	on	off
5	off	on	off
6	on	off	off
í 7	off	off	off