


FUJIKAMA USA, INC.

486AW 33/50

Processor	80486DX
Processor Speed	33/50MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	64/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	4167

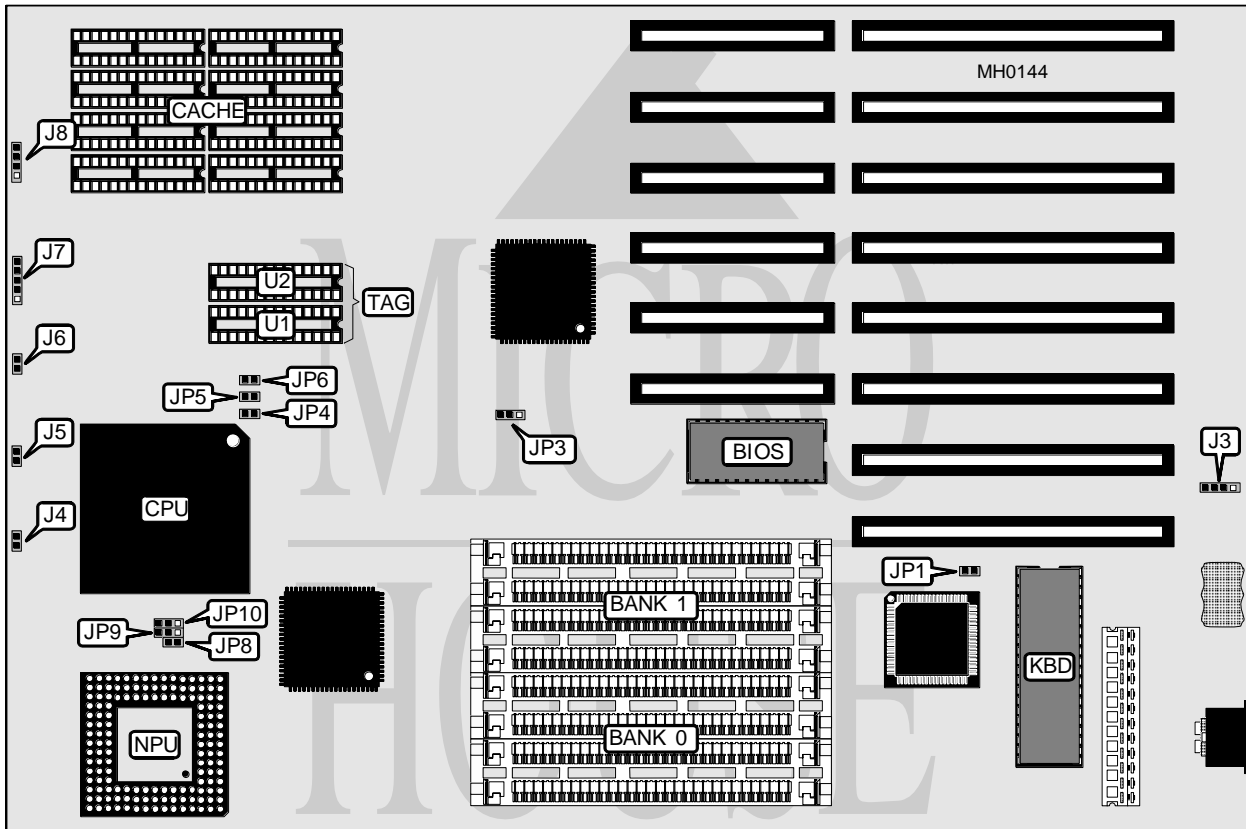

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Reset switch	J6
Turbo switch	J4	Power LED & Keylock	J7
Turbo LED	J5	Speaker	J8

Continued on next page . . .

FUJIKAMA USA, INC.
486AW 33/50

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP1	Open
Monitor type select color	JP1	Closed
í CPU speed select 33MHz	JP3	pins 2 & 3 closed
CPU speed select 50MHz	JP3	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	TAG (U1)	TAG (U2)
64KB	(8) 8K x 8	(1) 8K x 8	NONE
256KB	(8) 32K x 8	(1) 8K x 8	(1) 8K x 8
256KB	(8) 32K x 8	(1) 32K x 8	NONE

CACHE JUMPER CONFIGURATION			
Size	JP4	JP5	JP6
64KB	Open	Open	Open
256KB	Closed	Closed	Closed

CPU TYPE CONFIGURATION			
Type	JP8	JP9	JP10
80486SX	Open	pins 2 & 3 closed	open
80487SX	Closed	pins 1 & 2 closed	pins 1 & 2 closed
80486DX	Closed	pins 1 & 2 closed	pins 2 & 3 closed