


# EISA TECH CORPORATION AUSTI

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	TI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/128/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387/3167

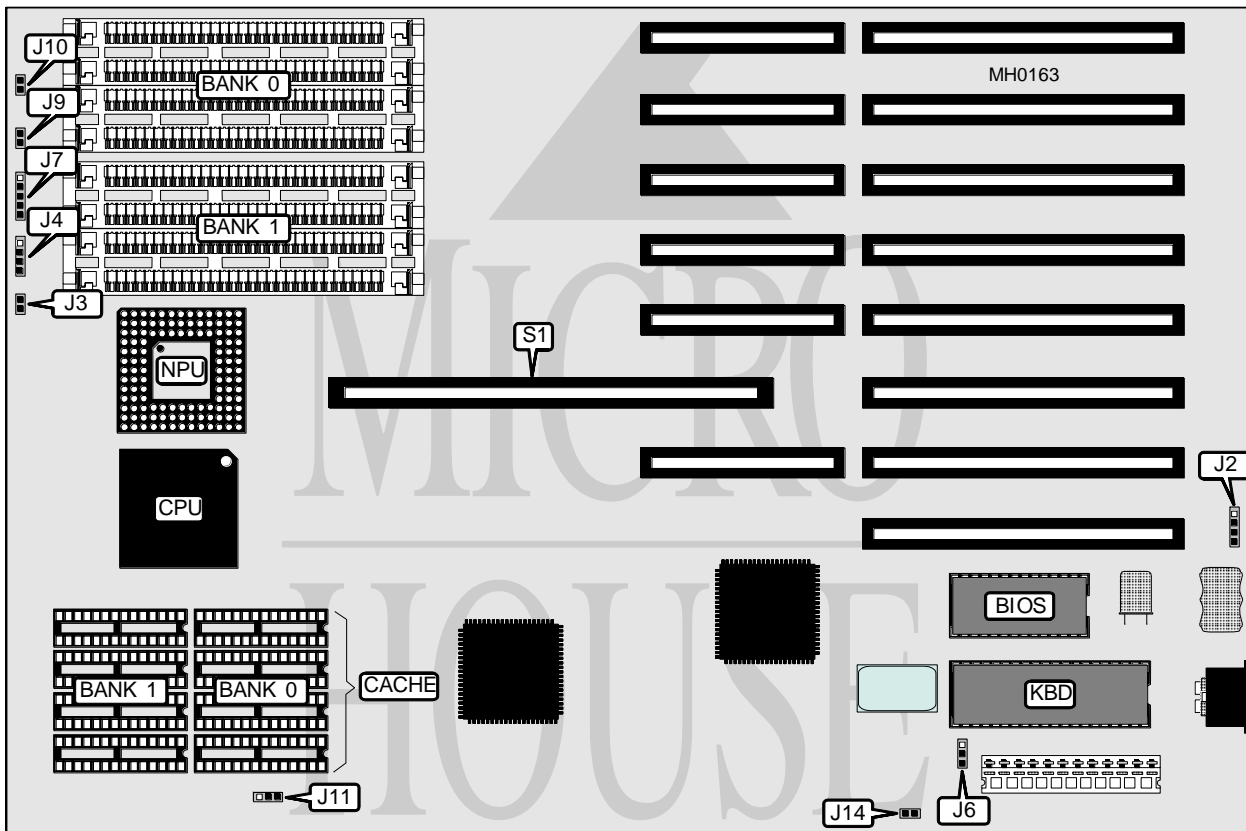

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	J9
Reset switch	J3	Turbo LED	J10
Speaker	J4	32-bit external memory card	S1
Power LED & keylock	J7		

Continued on next page . . .

# EISA TECH CORPORATION

## AUSTI

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	jumper	Position
í Monitor type select color	J6	pins 1 & 2 closed
Monitor type select monochrome	J6	pins 2 & 3 closed
í POST enabled	J14	Closed
POST disabled	J14	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
6MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	NONE
7MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
17MB	(4) 4M x 9	(4) 256K x 9	NONE	NONE
20MB	(4) 4M x 9	(4) 1M x 9	NONE	NONE
24MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
40MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	(4) 4M x 9
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	NONE
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

Note: Banks 2 and 3 are used when a 32-bit external memory card is installed at S1.

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
64KB	(4) 8K x 8	(4) 8K x 8
128KB	(4) 32K x 8	NONE
256KB	(4) 32K x 8	(4) 32K x 8

CACHE JUMPER CONFIGURATION	
Size	J11
64KB	pins 1 & 2 closed
128KB	pins 2 & 3 closed
256KB	pins 2 & 3 closed