


# FREE COMPUTER TECHNOLOGY, INC. 80486 EISA

<b>Processor</b>	80486DX
<b>Processor Speed</b>	33/50MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	64MB
<b>Cache</b>	256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	None
<b>NPU Options</b>	4167

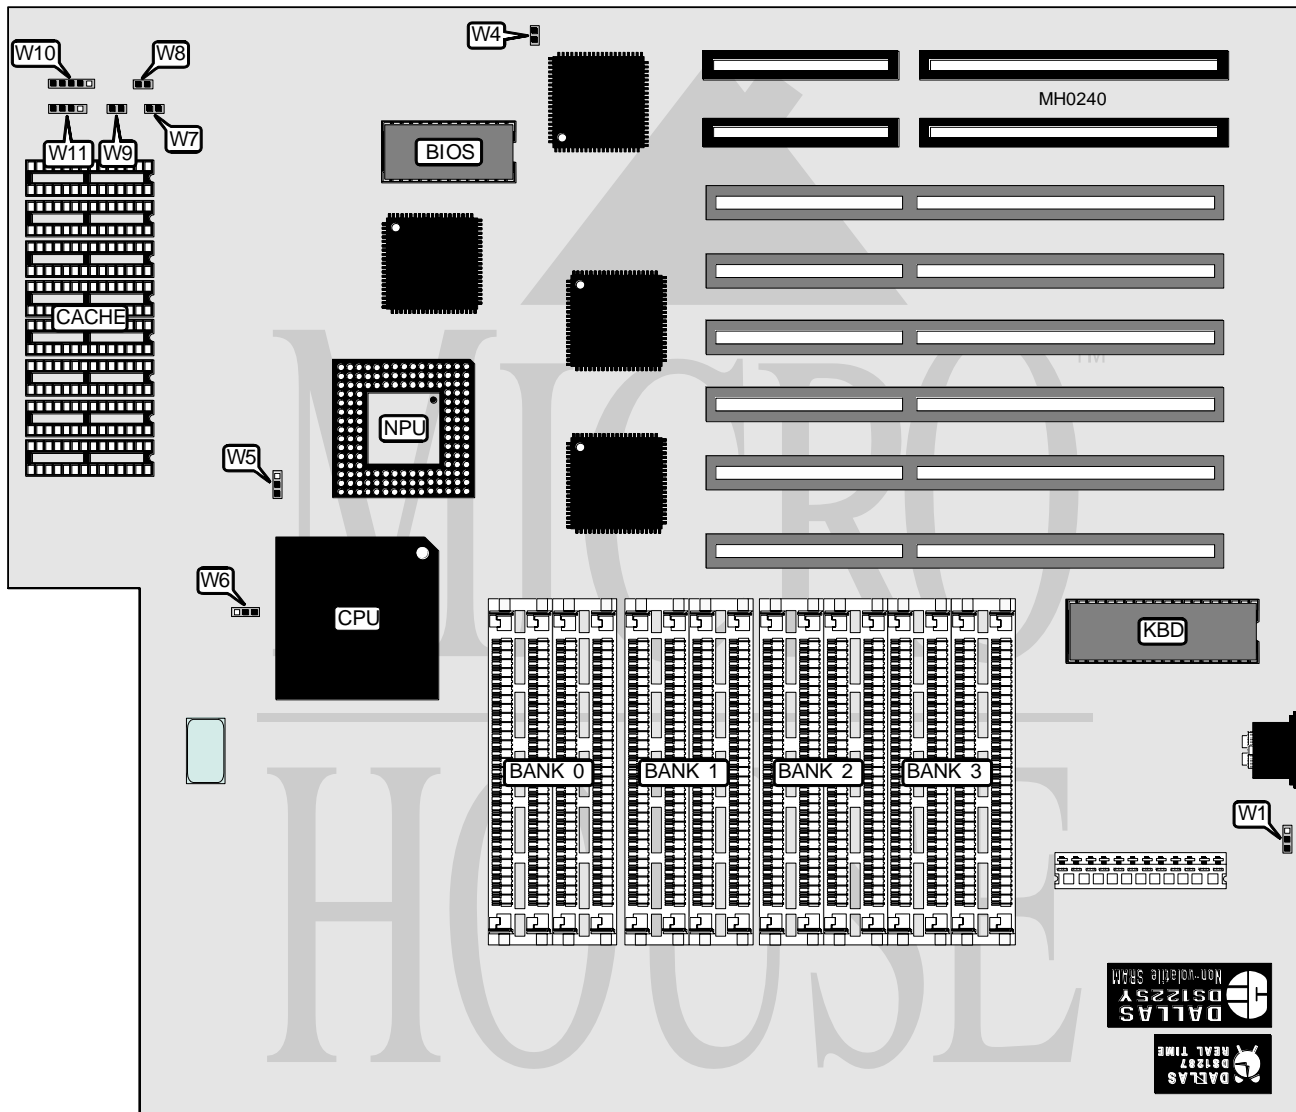

Continued on next page . . .

# FREE COMPUTER TECHNOLOGY, INC.

## 80486 EISA

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	W7	Power LED & keylock	W10
Turbo switch	W8	Speaker	W11
Turbo LED	W9		

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Power good signal detect from power supply	W1	pins 2 & 3 closed
Power good signal detect from board	W1	pins 1 & 2 closed
í Factory configured - do not alter	W4	N/A
í Factory configured - do not alter	W5	N/A
í Factory configured - do not alter	W6	N/A

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 1M x 9	(4) 256K x 9	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
9MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
13MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
17MB	(4) 4M x 9	(4) 256K x 9	NONE	NONE
20MB	(4) 4M x 9	(4) 1M x 9	NONE	NONE
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
33MB	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9	NONE
36MB	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9	NONE
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	NONE
49MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9
52MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION	
Size	Bank 0
256KB	(8) 32K x 8