


SEAGATE TECHNOLOGY, INC.
ST05X, ST325X

Q3/92

Data bus: 8-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Two IDE (XT) Interface drives
 Floppy drives supported: None

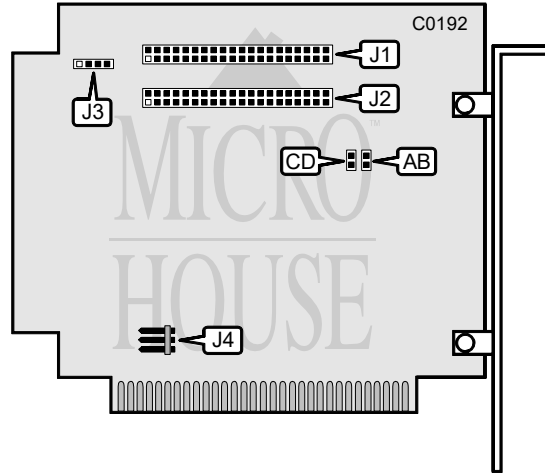

CONNECTIONS	
Function	Location
40-pin XT interface (IDE) control cable connector-internal	J1
40-pin XT interface (IDE) control cable connector-internal	J2
4-pin connector-drive active LED	J3
5-pin connector-DC power	J4

BIOS ADDRESS		
Address	Jumper AB	Jumper CD
C800h	open	open
D800h	open	closed
D000h	closed	open
E000h	closed	closed

MISCELLANEOUS TECHNICAL NOTES
Drive 0 on J1 uses I/O port address 320h-323h; Drive 1 on J2 uses I/O port address 324h-327h