


# DYNA MICRO, INC.

## MBA-386A-33/64

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	Addonics
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	64KB
<b>BIOS</b>	Award
<b>Dimensions</b>	332mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387/3167

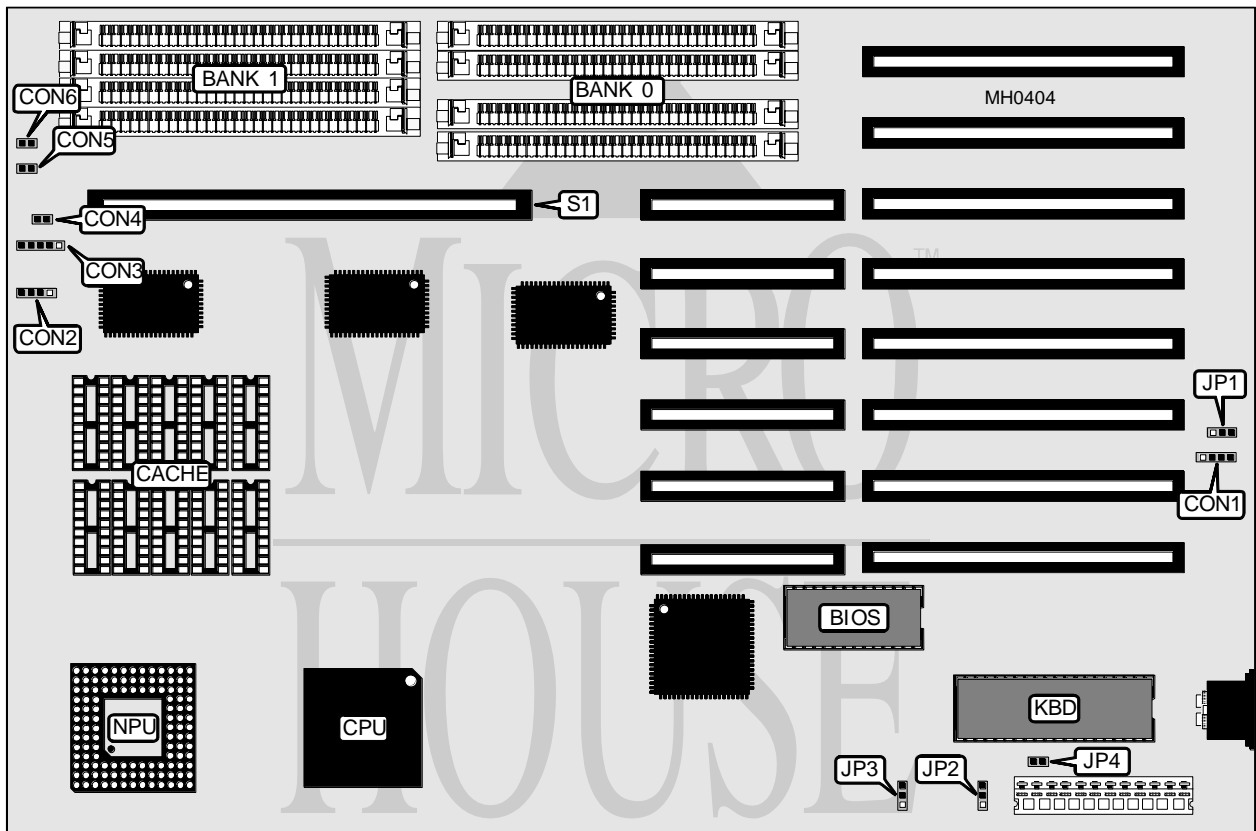

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CON1	Turbo switch	CON5
Speaker	CON2	Reset switch	CON6
Power LED & keylock	CON3	32-bit external memory card	S1
Turbo LED	CON4		

Continued on next page . . .

## DYNA MICRO, INC.

## MBA-386A-33/64

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery select external	JP1	pins 1 & 2 closed
Battery select internal	JP1	pins 2 & 3 closed
Battery select none	JP1	Open
í Monitor type select monochrome	JP2	pins 1 & 2 closed
Monitor type select color	JP2	pins 2 & 3 closed
í Power good signal detect from power supply	JP3	pins 2 & 3 closed
Power good signal detect from board	JP3	pins 1 & 2 closed
í Factory configured - do not alter	JP4	N/A
Note: This board does not come standard with an internal battery,		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
Note: Banks 2 & 3 are used when a 32-bit external memory card is installed at S1.				

CACHE CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 8K x 8	(2) 16K x 1
Note: The location of the TAG is unidentified. This board comes standard with 64KB cache and is not alterable.		