


UNIDENTIFIED

BI-039B MATE I/O

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives
Maximum heads/cyl. 8 heads and 1024 cylinders
Special Features Two serial, one parallel, and one game port

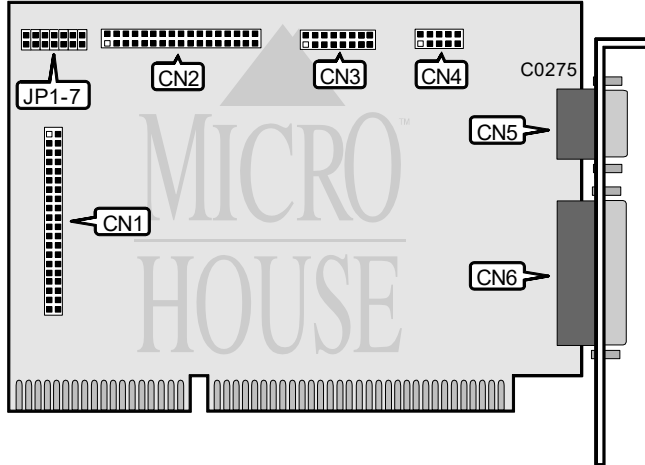

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) control cable connector	CN1
34-pin control cable connector-floppy drive	CN2
16-pin game port-internal	CN3
9-pin serial port (COM2/4)-internal	CN4
9-pin serial port (COM1/3)-external	CN5
25-pin parallel port (LPT1/2)-external	CN6

Continued on next page . . .

UNIDENTIFIED

BI-039B MATE I/O

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í COM2 enabled	JP1	closed
COM2 disabled	JP1	open
í COM1 enabled	JP2	closed
COM1 disabled	JP2	open
í Floppy drive enabled	JP3	closed
Floppy drive disabled	JP3	open
í Hard drive enabled	JP4	closed
Hard drive disabled	JP4	open
í Game port enabled	JP5	closed
Game port disabled	JP5	open

GAME PORT ADDRESS		
Address	Jumper JP6	Jumper JP7
Enabled	open	open
3BCh	closed	open
378h	closed	closed
278h	open	closed