


# DYNA MICRO, INC.

## M B A - 3 8 6 B - 2 5

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	UMC
<b>Max. Onboard DRAM</b>	12MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387/3167

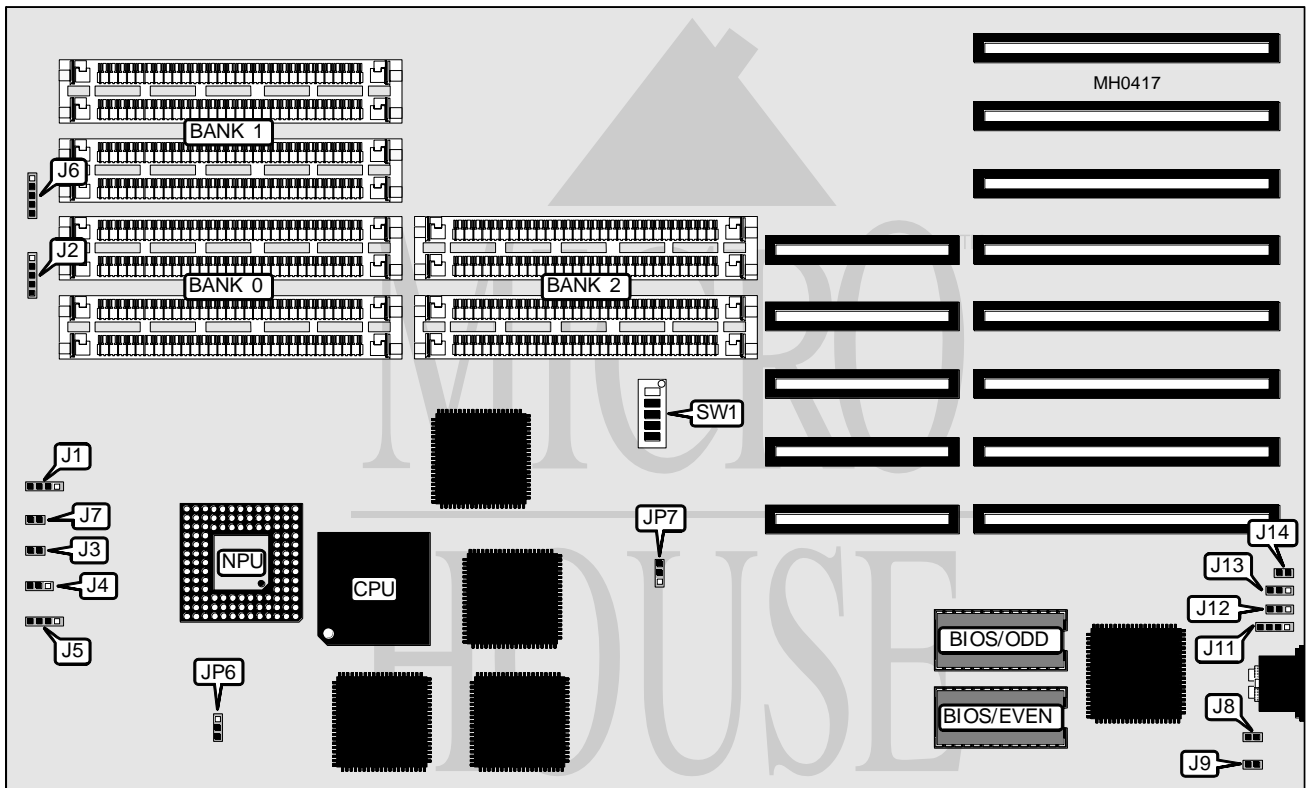

CONNECTIONS			
Purpose	Location	Purpose	Location
Speed display	J1	Speaker	J5
Auxiliary keyboard	J2	Power LED & keylock	J6
Reset switch	J3 & J4	Turbo LED	J7
Turbo switch	J4 & J13	External battery	J11

Continued on next page . . .

DYNA MICRO, INC.  
MBA-386B-25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J8	open
Monitor type select color	J8	closed
í NPU type select 3167 or none	J9	closed
NPU type select 80387	J9	open
í Battery select internal	J12	pins 2 & 3 closed
Battery select external	J12	pins 1 & 2 closed
í Factory configured - do not alter	JP6	pins 1 & 2 closed
í Factory configured - do not alter	JP7	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
1MB	(4) 256K x 9	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

DRAM SWITCH CONFIGURATION			
Size	SW1/1	SW1/2	SW1/3
1MB	On	On	On
2MB	On	Off	On
3MB	On	Off	Off
4MB	Off	On	On
8MB	Off	Off	On
12MB	Off	Off	Off

DRAM SPEED CONFIGURATION			
Speed	SW1/1	SW1/2	SW1/3
80ns	On	On	On
100ns	On	Off	On