


# UNIDENTIFIED 286 TURBO

<b>Processor</b>	80286
<b>Processor Speed</b>	10/12MHz
<b>Chip Set</b>	VLSI
<b>Max. Onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	AMI/Award/Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

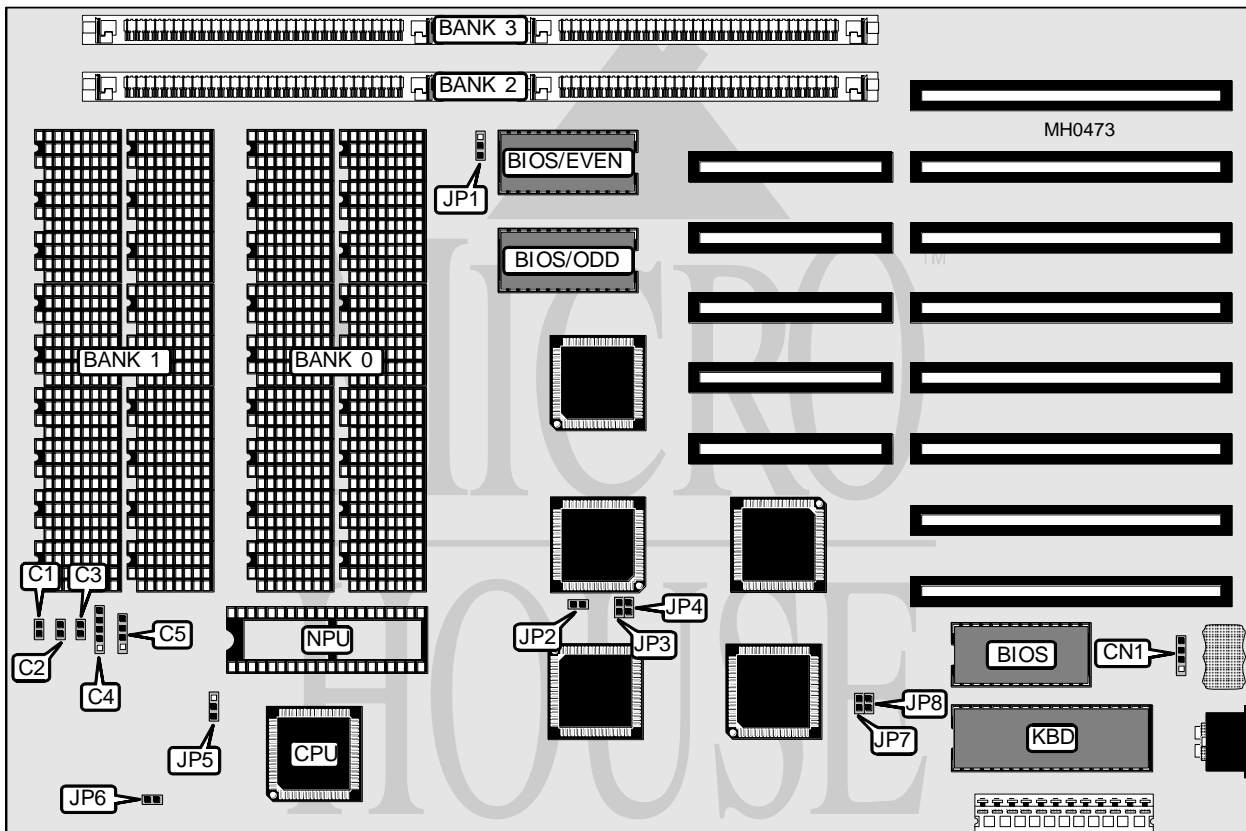

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	C1	Power LED & keylock	C4
Turbo LED	C2	Speaker	C5
Reset switch	C3	External battery	CN1

Continued on next page . . .

# UNIDENTIFIED

## 286 TURBO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Location
í BIOS type select 27256	JP1	pins 1& 2 closed
BIOS type select 27512	JP1	pins 2 & 3 closed
Factory configured - do not alter	JP5	N/A
CPU slow speed select 8MHz	JP6	Open
CPU slow speed select 6MHz	JP6	Closed
í Monitor type select color	JP7	Closed
Monitor type select monochrome	JP7	Open
í DRAM speed select 0 wait states	JP8	Open
DRAM speed select 1 wait state	JP8	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	NONE	NONE	NONE
512KB	NONE	NONE	(2) 256K x 9	NONE
640KB	(18) 41256	(18) 4164	NONE	NONE
640KB	NONE	NONE	(2) 256K x 9	(2) 64K x 9
1MB	(18) 41256	(18) 41256	NONE	NONE
1MB	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	(18) 411000	NONE	NONE	NONE
2MB	NONE	NONE	(2) 1M x 9	NONE
4MB	(18) 411000	(18) 411000	NONE	NONE
4MB	NONE	NONE	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION			
Size	JP2	JP3	JP4
512KB	Closed	Closed	Closed
512KB	Closed	Closed	Closed
640KB	Closed	Closed	Open
640KB	Closed	Closed	Open
1MB	Closed	Open	Closed
1MB	Closed	Open	Closed
2MB	Closed	Open	Open
2MB	Closed	Open	Open
4MB	Open	Closed	Closed
4MB	Open	Closed	Closed