


LONGSHINE MICROSYSTEM, INC.
LCS-6822N

Q1/93

Data bus: 8-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Up to six SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

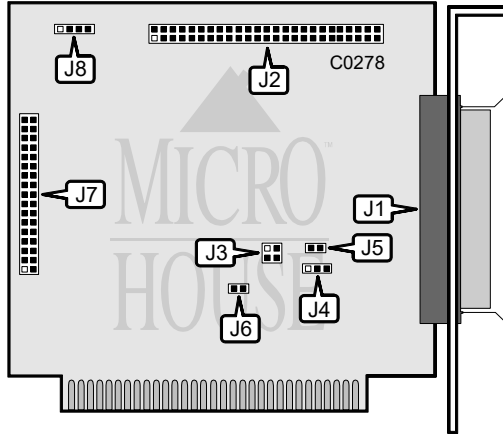

CONNECTIONS	
Function	Location
25-pin SCSI connector-external	J1
25-pin SCSI connector-internal	J2
34-pin control cable connector-floppy drives	J7
4-pin connector-drive active LED	J8

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Interrupt Request is IRQ3	J4	pins 1 & 2 closed
Interrupt Request is IRQ5	J4	pins 2 & 3 closed
One wait state enabled	J5	open
Zero wait state enabled	J5	closed
Floppy drive enabled	J6	open
Floppy drive disabled	J6	closed

Continued on next page . . .

LONGSHINE MICROSYSTEM, INC.
LCS-6822N

. . . continued from previous page

BIOS ADDRESS		
Address	Jumper J3	
í CA00h	pins 1 & 2 open	pins 3 & 4 open
CE00h	pins 1 & 2 open	pins 3 & 4 closed
C800h	pins 1 & 2 closed	pins 3 & 4 open
DE00h	pins 1 & 2 closed	pins 3 & 4 closed