


# INFORMTECH INTERNATIONAL, INC. IT-PACK4

Q4/93

**Data bus:** 16-bit, ISA  
**Size:** Half-length, full-height card  
**Hard drive supported:** Two IDE(AT) Interface drives  
**Floppy drives supported:** Two 360KB, 720KB, 1.2MB, or 1.44MB drives

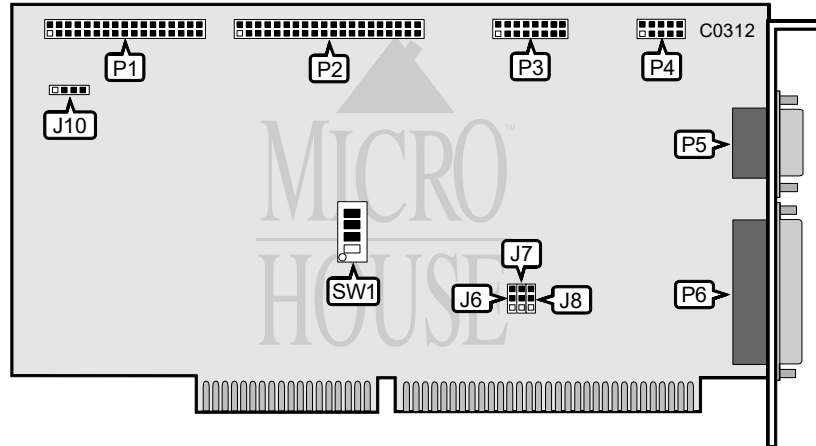

CONNECTIONS	
Purpose	Location
4-pin connector - Drive active LED	J10
34-pin control cable connector - floppy drive	P1
40-pin IDE(AT) Interface connector	P2
15-pin game port-internal	P3
10-pin serial port (COM2/4) - internal	P4
9-pin serial port (COM1/3) - external	P5
25-pin parallel port - external	P6

SERIAL PORT CONFIGURATION			
Serial port 1	Serial port 2	SW 1/switch 1	SW1/switch 2
COM1	COM2	on	on
COM2	COM3	off	on
COM3	COM4	on	off
Disabled	Disabled	off	off

Continued on next page . . .

**INFORMTECH INTERNATIONAL, INC.  
IT-PACK4**

*. . . continued from previous page*

PARALLEL PORT CONFIGURATION		
Parallel port	SW1/switch 3	SW1/switch 4
MDA printer (3BC-3BFh)	on	off
LPT1 (378-37Fh)	off	on
LPT2 (278-27Fh)	on	on
Disabled	off	off

MISCELLANEOUS TECHNICAL NOTES
Jumpers J6 - J8 are factory configured - do not alter