


# UNIDENTIFIED

## 386/33-25

**Processor** 80386DX  
**Processor Speed** 25/33MHz  
**Chip Set** SIS  
**Max. Onboard DRAM** 8MB  
**Cache** 32/64/128KB  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** 32-bit external memory card slot  
**NPU Options** 80387

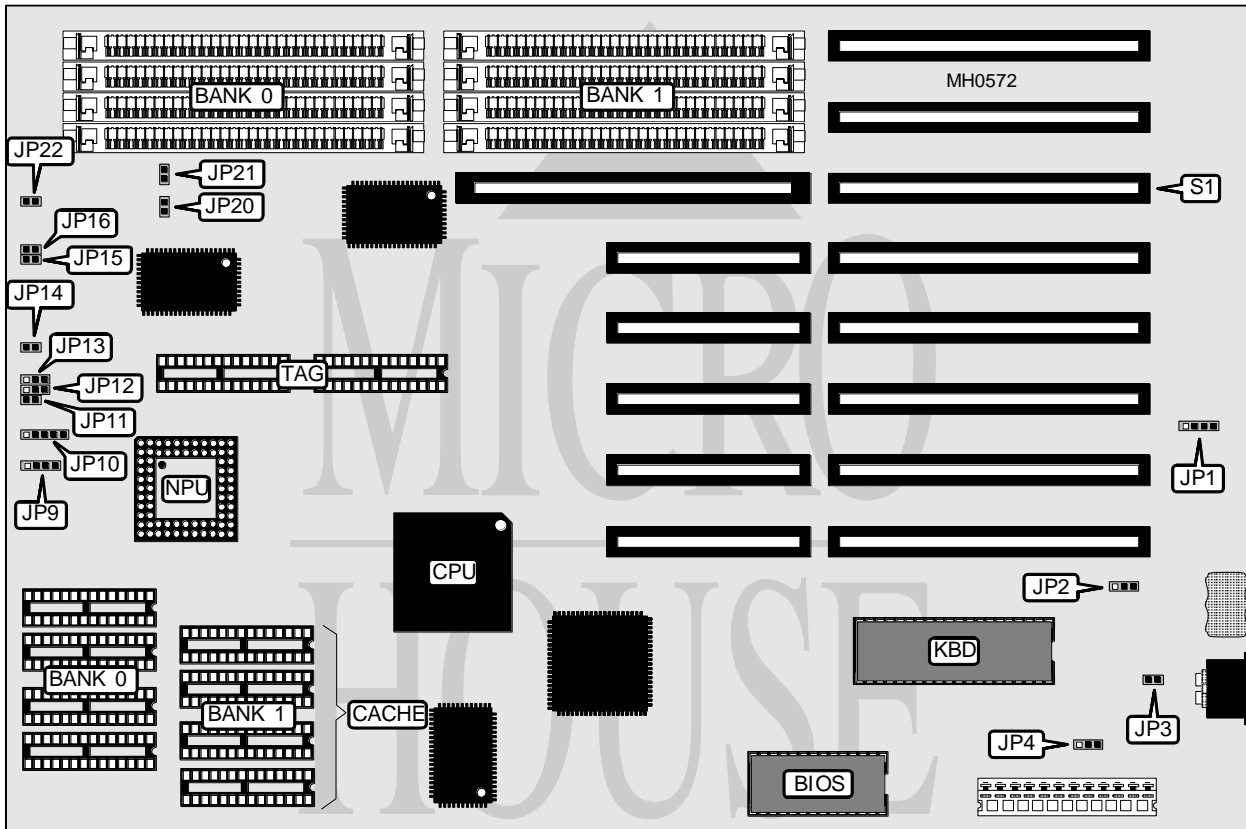

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP1	Turbo switch	JP14
Speaker	JP9	Turbo LED	JP22
Power LED & keylock	JP10	32-bit external memory card	S1
Reset switch	JP11		

Continued on next page . . .

# UNIDENTIFIED

## 386/33-25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	JP2	pins 2 & 3 closed
Battery type select external	JP2	pins 1 & 2 closed
í CMOS memory normal operation	JP3	Open
CMOS memory clear	JP3	Closed
í Monitor type select color	JP4	pins 2 & 3 closed
Monitor type select monochrome	JP4	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 4	NONE
2MB	(4) 256K x 4	(4) 256K x 4
4MB	(4) 1M x 4	NONE
8MB	(4) 1M x 4	(4) 1M x 4

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
32KB	(4) 8K x 8	NONE	(2) 16K x 4
64KB	(4) 8K x 8	(4) 8K x 8	(2) 16K x 4
128KB	(4) 32K x 8	NONE	(2) 64K x 4

CACHE JUMPER CONFIGURATION		
Size	JP12	JP13
32KB	pins 2 & 3 closed	pins 1 & 2 closed
64KB	pins 2 & 3 closed	pins 2 & 3 closed
128KB	pins 1 & 2 closed	pins 2 & 3 closed

CACHE JUMPER CONFIGURATION				
Setting	JP15	JP16	JP20	JP21
Enabled	Open	Open	Open	Open
Disabled	Closed	Closed	Closed	Closed