


# DD&TT ENTERPRISE USA COMPANY DT-3767

Q4/93

**Data bus:** 16-bit, ISA  
**Size:** Half-length, full-height card  
**Hard drive supported:** Two IDE(AT) Interface drives  
**Floppy drives supported:** Two 360KB, 720KB, 1.2MB, or 1.44MB drives

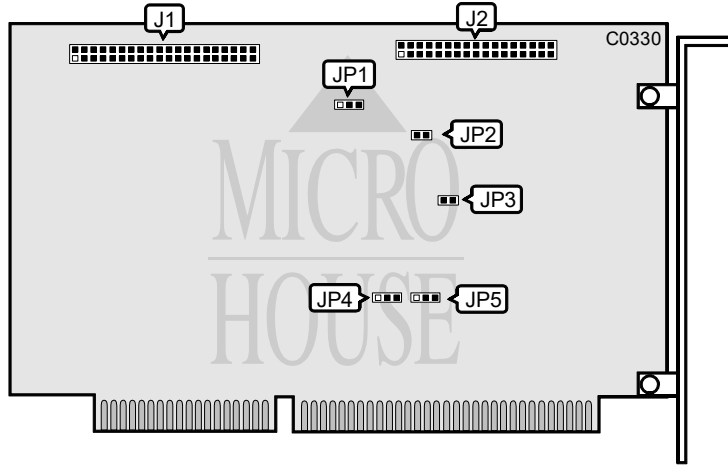

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	J1
34-pin control cable connector-floppy drive	J2
2-pin connector-Drive active LED	JP2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Direct IRQ14 control	JP1	Pins 1 & 2 closed
Select SLAVE/ACTIVE control	JP1	Pins 2 & 3 closed
Floppy drive enabled	JP3	open
Floppy drive disabled	JP3	closed
Hard drive (CS0) port address is 1F0-1F7h	JP4	Pins 2 & 3 closed
Hard drive (CS0) port address is 170-177h	JP4	Pins 1 & 2 closed
Hard drive disabled	JP4 & JP5	open
Hard drive (CS1) port address is 3F0-3F7h	JP5	Pins 2 & 3 closed
Hard drive (CS1) port address is 370-377h	JP5	Pins 1 & 2 closed

