


# COMPAQ COMPUTER CORPORATION

## DESKPRO 386 (TYPE 'A')

<b>Processor</b>	80386DX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	ETEQ
<b>Max. Onboard DRAM</b>	2MB (on system memory card)
<b>Cache</b>	None
<b>BIOS</b>	Compaq
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Proprietary system memory card slot, proprietary external memory card slot (on system memory card)
<b>NPU Options</b>	80287

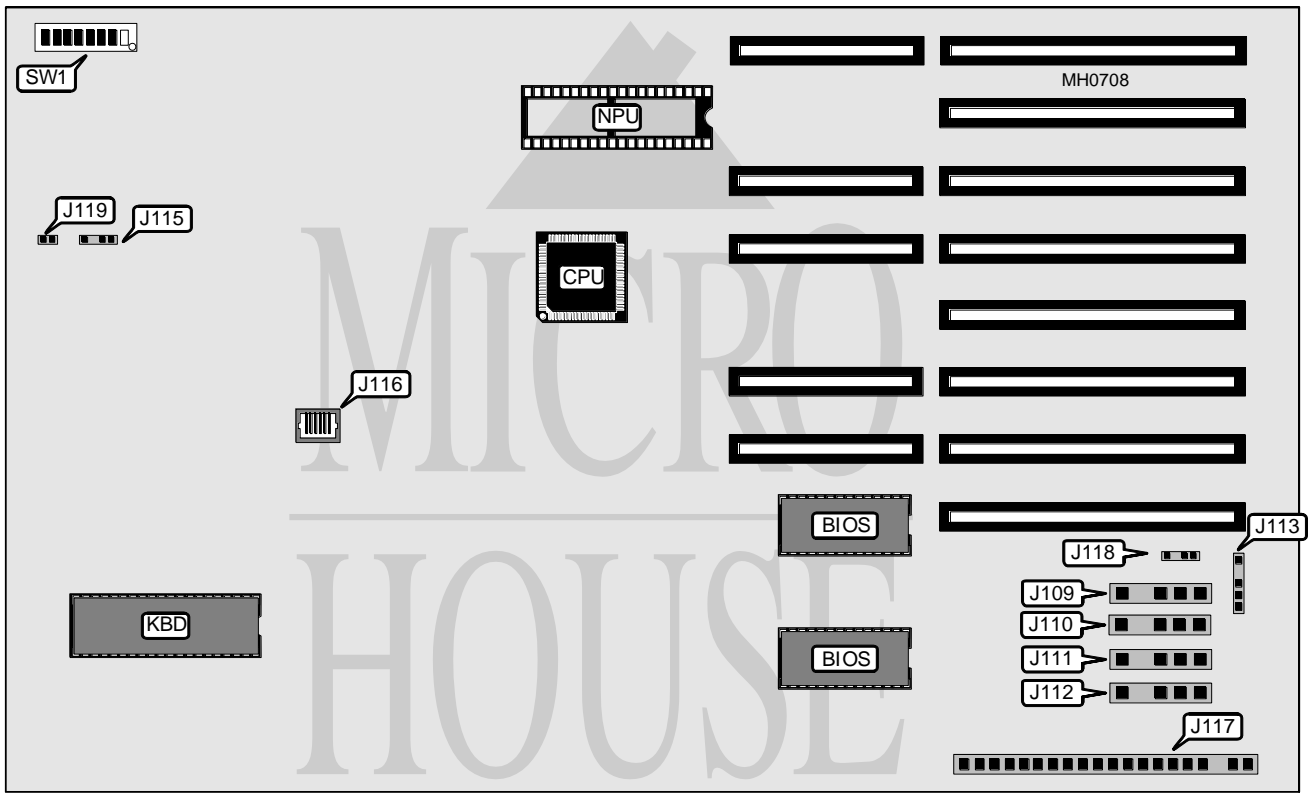


CONNECTIONS			
Purpose	Location	Purpose	Location
Fixed drive power	J109	Proprietary keyboard plug	J116
Tape backup power	J110	Main power	J117
Floppy drive power	J111	External battery	J118
Floppy drive power	J112	Keylock	J119
Monitor power	J113	Proprietary system memory card	S1
Speaker	J115		

Continued on next page . . .

# COMPAQ COMPUTER CORPORATION DESKPRO 386 (TYPE 'A')

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Fail-safe timer enabled	SW1/1	On
Fail-safe timer disabled	SW1/1	Off
í NPU enabled	SW1/2	On
NPU disabled	SW1/2	Off
í NPU type select 4MHz	SW1/3	On
NPU type select 8MHz	SW1/3	Off
í CPU speed at boot automatic	SW1/4	On
í CPU speed at boot high	SW1/4	Off
í Factory configured - do not alter	SW1/5	Off
í Monitor type select dual-mode/color	SW1/6	On
Monitor type select monochrome other than Compaq	SW1/6	Off
í Factory configured - do not alter	SW1/7	On
í Factory configured - do not alter	SW1/8	On

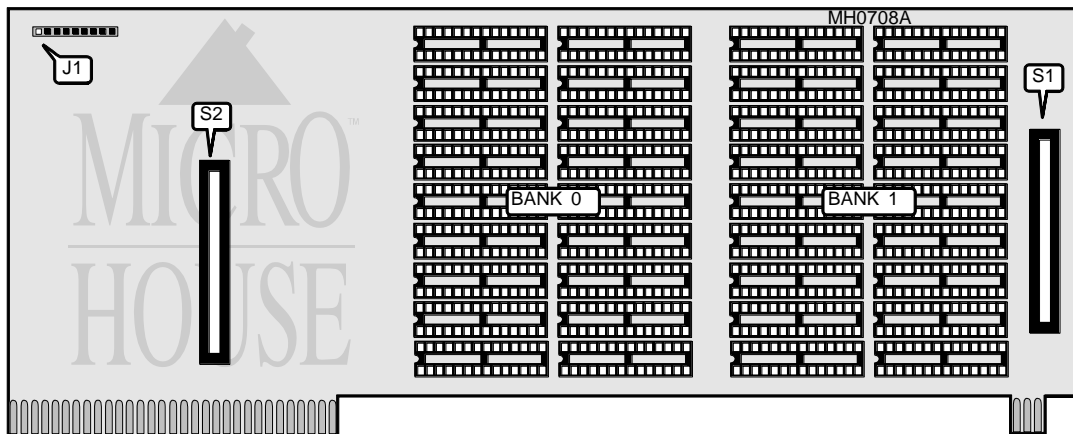

CONNECTIONS	
Purpose	Location
Proprietary external memory card	S1 & S2

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(36) 41256	NONE
2MB	(36) 41256	(36) 41256

DRAM CONFIGURATION				
Size	Base Memory	Ext. Memory	1MBExp. Memory	J1
1MB	256KB	768KB	disabled	pins 1 & 2, 4 & 5, 7 & 8 closed
1MB	512KB	512KB	disabled	pins 2 & 3, 4 & 5, 7 & 8 closed
1MB	640KB	384KB	disabled	pins 2 & 3, 5 & 6, 7 & 8 closed
2MB	256KB	768KB	enabled	pins 1 & 2, 4 & 5, 8 & 9 closed
2MB	512KB	512KB	enabled	pins 2 & 3, 4 & 5, 8 & 9 closed
2MB	640KB	384KB	enabled	pins 2 & 3, 5 & 6, 8 & 9 closed

Note: Jumpers 3 & 4 and 6 & 7 should never be closed as serious damage to the system may result.

