


WYSE TECHNOLOGY, INC

WY-964

Q1/94

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

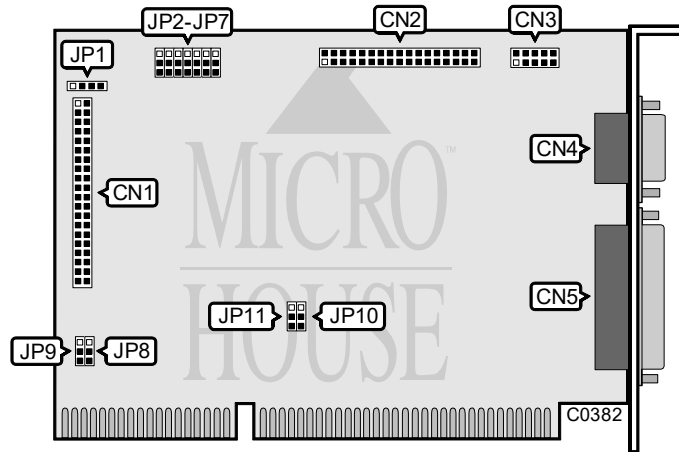

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
10-pin serial port (COM2/4) - internal	CN3
10-pin serial port (COM1/3) - external	CN4
25-pin parallel port (LPT1/2) - external	CN5
4-pin connector - Drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Index address 398, Data address 399 enabled	JP7	pins 1 & 2 closed
Index address 26E, Data address 26F enabled	JP7	pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTES
 Jumpers JP2, JP3, JP4, JP5, JP6, JP9, and JP11 are factory configured to pins 1 & 2 closed; JP8 and JP10 are factory configured to pins 2 & 3 closed - do not alter.