


WYSE TECHNOLOGY, INC

WY-954

Q1/94

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

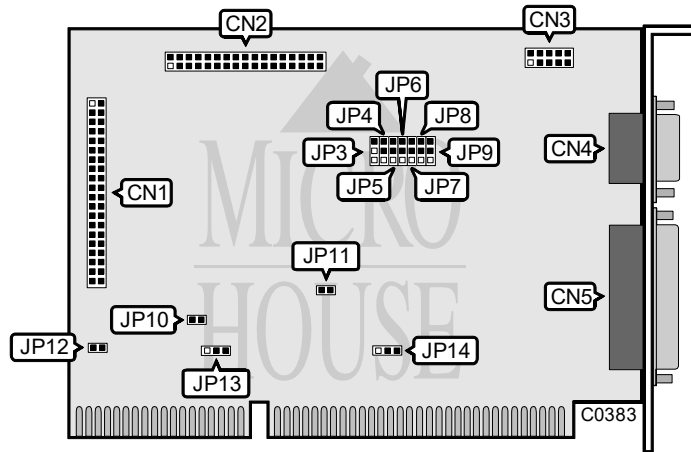

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
10-pin serial port (COM2/4) - internal	CN3
10-pin serial port (COM1/3) - external	CN4
25-pin parallel port (LPT1/2) - external	CN5
2-pin connector - Drive active LED	JP12

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive enabled	JP8	pins 2 & 3 closed
	JP8	pins 1 & 2 closed
f Hard drive enabled	JP10 & JP11	closed
	JP10 & JP11	open
f Parallel Port interrupt IRQ7 enabled	JP14	pins 1 & 2 closed
	JP14	pins 2 & 3 closed

Continued on next page . . .

WYSE TECHNOLOGY, INC
WY-954

. . . continued from previous page

SERIAL PORT CONFIGURATION				
Serial Port 1	Serial Port 2	JP5	JP6	JP7
COM1	COM2	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed
COM1	Disabled	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
COM2	COM1	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	COM1	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	COM2	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed
COM2	Disabled	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
Disabled	Disabled	pins 1 & 2 closed	pins 1 & 2 closed	n/a

PARALLEL PORT CONFIGURATION		
LPT	JP3	JP4
LPT1	pins 1 & 2 closed	pins 2 & 3 closed
LPT2	pins 2 & 3 closed	pins 2 & 3 closed
LPT3	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed

MISCELLANEOUS TECHNICAL NOTES
Jumpers JP9 and JP13 are factory configured to pins 2 & 3 closed - do not alter.