


# DATA TECHNOLOGY CORPORATION DTC51-2G

Q1/94

Data bus: 8-bit, ISA  
 Size: Half-length, full-height card  
 Hard drive supported: Up to seven SCSI devices  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

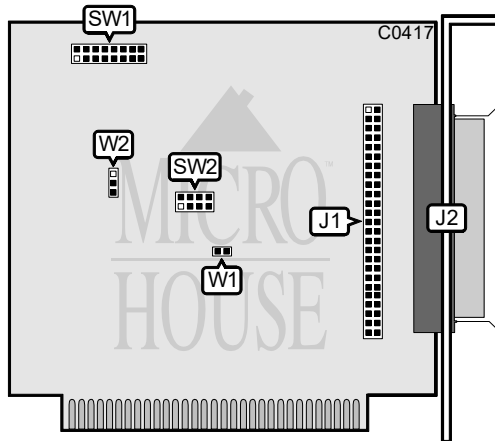

CONNECTIONS	
Function	Location
50-pin SCSI connector - internal	J1
26-pin SCSI connector - external	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í SCSI retries enabled	SW1/jumper 2	open
SCSI retries disabled	SW1/jumper 2	closed
í SCSI parity check enabled	SW1/jumper 3	closed
SCSI parity check disabled	SW1/jumper 3	open
í DMA Channel 1 enabled	SW1/jumper 5	closed
DMA Channel 3 enabled	SW1/jumper 5	open
í DMA enabled	SW1/jumper 6	open
DMA disabled	SW1/jumper 6	closed

Continued on next page . . .

**DATA TECHNOLOGY CORPORATION  
DTC51-2G**

. . . continued from previous page

I/O PORT ADDRESS - SW1		
Address	SW1/jumper 7	SW1/jumper 8
320h	closed	closed
í 330h	closed	open
340h	open	closed

BIOS ADDRESS - SW2				
Address	SW2/jumper 1	SW2/jumper 2	SW2/jumper 3	SW2/jumper 4
C000h	closed	closed	closed	closed
C400h	closed	closed	closed	open
C800h	closed	closed	open	closed
CC00h	closed	closed	open	open
D000h	closed	open	closed	closed
D400h	closed	open	closed	open
í D800h	closed	open	open	closed
DC00h	closed	open	open	open
E000h	open	closed	closed	closed
E400h	open	closed	closed	open
E800h	open	closed	open	closed
EC00h	open	closed	open	open
F000h	open	open	closed	closed
F400h	open	open	closed	open
F800h	open	open	open	closed
FC00h	open	open	open	open

MISCELLANEOUS TECHNICAL NOTES
Jumpers SW1/jumper 1, SW1/jumper 4, W2, and W2 are factory configured as follows: SW1/jumper 1 - open, SW1/jumper 4 - closed, Jumper W1 - closed, Jumper W2 - pins 2 & 3 closed. Do not alter these settings.