


# HEDAKA HED--826

Q1/94

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Two IDE (AT) Interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

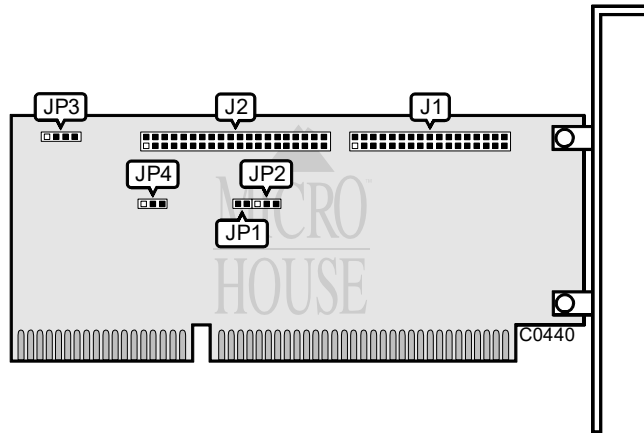

CONNECTIONS	
Function	Location
34-pin control cable connector-floppy drive	J1
40-pin AT Interface (IDE) connector	J2
4-pin connector-Drive active LED	JP3

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Single speed floppy drives supported	JP1	open
Dual speed floppy drives supported	JP1	closed
IRQ14 normal	JP4	pins 2 & 3 closed
IRQ14 delayed until ACTIVE- signal is removed	JP4	pins 1 & 2 closed

MISCELLANEOUS TECHNICAL NOTES
Jumper JP2 is reserved - do not alter.