


DATA TECHNOLOGY CORPORATION DTC3270VL REV. A

Q1/94

Data bus: 32-bit, VL-bus
 Size: Three-quarter-length, full-height card
 Hard drive supported: Up to seven SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

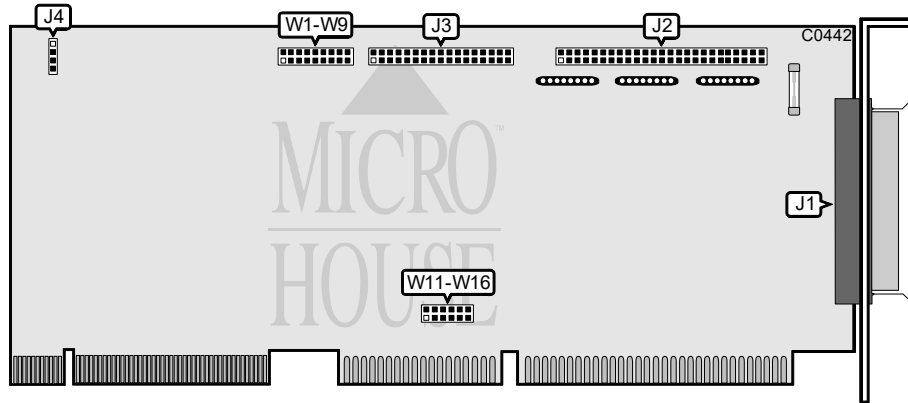

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	J1
50-pin SCSI connector - internal	J2
34-pin control cable connector-floppy drive	J3
4-pin connector-Drive active LED	J4

VL-BUS CLOCK SPEED		
Speed	Jumper W1	Jumper W2
20/25MHz	open	closed
33MHz	closed	open
40/50MHz	open	open

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
SCSI parity check enabled	W3	on
SCSI parity check disabled	W3	off
Shared Interrupt disabled	W4	on
Shared Interrupt enabled	W4	off

Continued on next page . . .

DATA TECHNOLOGY CORPORATION
DTC3270VL REV. A

. . . continued from previous page

SCSI ID			
ID	Jumper W5	Jumper W6	Jumper W7
0	closed	closed	closed
1	closed	closed	open
2	closed	open	closed
3	closed	open	open
4	open	closed	closed
5	open	closed	open
6	open	open	closed
7	open	open	open

BIOS ADDRESS		
Address	Jumper W8	Jumper W9
C800h	closed	closed
CC00h	closed	open
D800h	open	closed
DC00h	open	open

SCSI ID						
ID	W11	W12	W13	W14	W15	W16
10	closed	closed	open	open	open	closed
11	closed	open	open	open	closed	open
12	open	closed	open	closed	open	open
15	open	open	closed	open	open	open
Disabled	open	open	open	open	open	open