


DATA TECHNOLOGY CORPORATION

DTC5180C REV. G

Q2/94

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two MFM ST506/412 drives
 Floppy drives supported: None

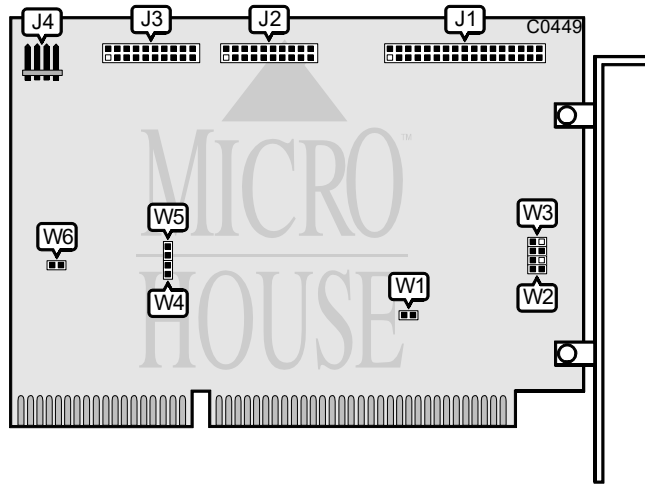

CONNECTIONS	
Function	Location
34-pin control cable connector - hard drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
4-pin connector-Drive active LED	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive change not driven	W1	open
Floppy drive change signal driven low	W1	closed
f Hard drive port address is 3F6, 3F7, 1F0-1F7h	W4 & W5	open
Hard drive port address is 376, 377, 170-177h	W4 & W5	closed

HARDWARE/FIRMWARE DRIVE SELECT MODE ENABLE			
Function	W2 & W3/jumper 1	W2 & W3/jumper 2	W6
Hardware mode	closed	open	closed
Firmware mode	open	closed	open