


MITSUBISHI ELECTRONICS

MP 3220

Processor	80386DX
Processor Speed	25MHz
Chip Set	Mitsubishi
Max. onboard DRAM	1MB (location unknown)
SRAM Cache	32KB
BIOS	Mitsubishi
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card, IDE interface, floppy drive interface, parallel port, serial ports (2)
NPU Options	80387DX/3167

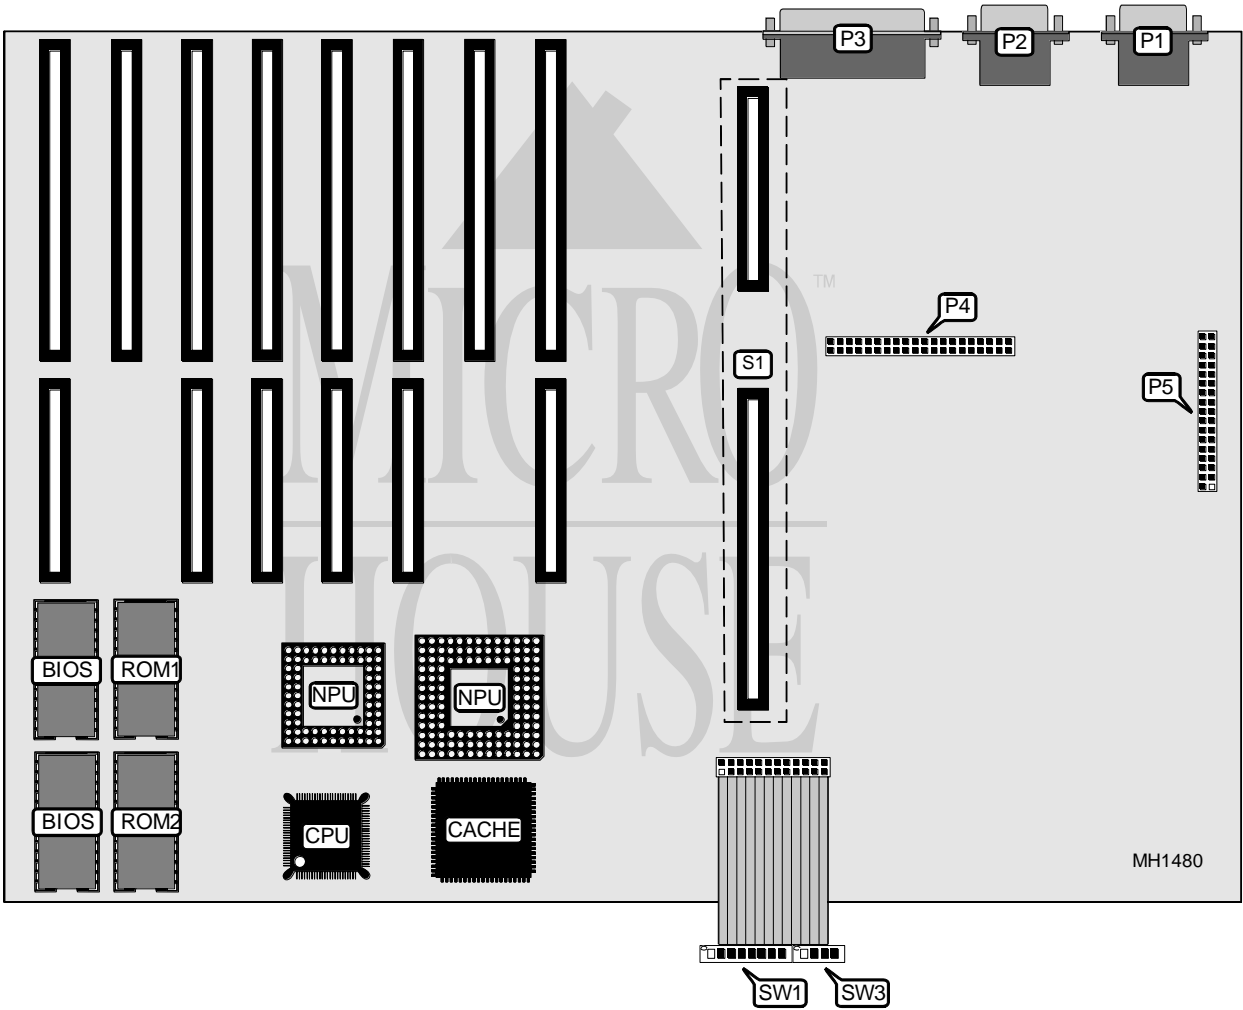

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port (COM1)	P1	IDE interface	P4
Serial port (COM2)	P2	Floppy drive interface	P5
Parallel port	P3	32-bit external memory card	S1

Continued on next page . . .

MITSUBISHI ELECTRONICS

MP 3220

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í I/O bus speed select 8MHz	SW1/switch 1	On
I/O bus speed select 6MHz	SW1/switch 1	Off
í External memory card enabled	SW1/switch 2	Off
External memory card disabled	SW1/switch 2	On
í Factory configured - do not alter	SW1/switch 3	Off
í POST select normal	SW1/switch 4	Off
POST select minimum	SW1/switch 4	On
í Base memory select 512KB	SW1/switch 5	Off
Base memory select 256KB	SW1/switch 5	On
í Factory configured - do not alter	SW1/switch 6	Off
í Keyboard select enhanced	SW1/switch 7	On
Keyboard select standard	SW1/switch 7	Off
í Monitor type select color	SW1/switch 8	On
Monitor type select monochrome	SW1/switch 8	Off
í Cache enabled	SW2/switch 1	On
Cache disabled	SW2/switch 1	Off
í IDE interface enabled	SW2/switch 2	Off
IDE interface disabled	SW2/switch 2	On
í NPU enabled	SW2/switch 3	Off
NPU disabled	SW2/switch 3	On
í Floppy drive interface enabled	SW2/switch 4	Off
Floppy drive interface disabled	SW2/switch 4	On

SERIAL PORT CONFIGURATION			
COM1 (P1)	COM2 (P2)	SW3/switch 5	SW3/Switch 6
Enabled	Enabled	Off	Off
Enabled	Disabled	Off	On
Disabled	Enabled	On	Off
Disabled	Disabled	On	On

PARALLEL PORT CONFIGURATION		
LPT	SW3/switch 7	SW3/Switch 8
í LPT1	Off	Off
LPT2	Off	On
LPT3	On	Off
Disabled	On	On