


**DTK COMPUTER, INC.**  
**P T M - 1 0 3 0**

**Processor** 80286  
**Processor Speed** 10MHz  
**Chip Set** VLSI  
**Max. onboard DRAM** 1MB  
**Cache** None  
**BIOS** DTK  
**Dimensions** 220mm x 218mm  
**I/O Options** None  
**NPU Options** 80287

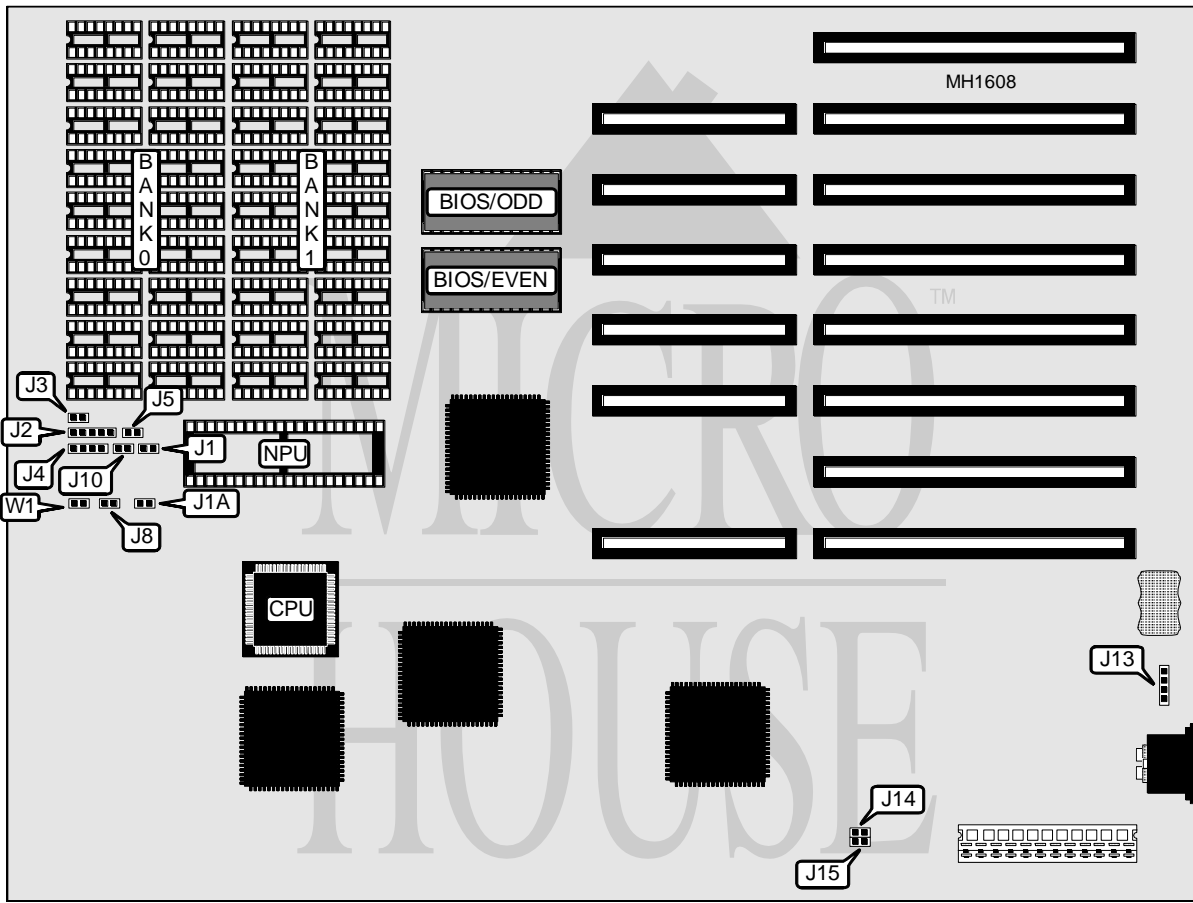

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J1	Reset switch	J5
Power LED & keylock	J2	Turbo LED	J10
Speaker	J4	External battery	J13

Continued on next page . . .

**DTK COMPUTER, INC.**  
**P T M - 1 0 3 0**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J3	Open
Monitor type select color	J3	Closed
í Select 0 wait state	J8	Closed
Select 1 wait states	J8	Open
í CPU speed normal	J1A	Closed
CPU speed high	J1A	Open
í Factory configured - do not alter	W1	N/A
Note: Turbo speed can also be activated by pressing Ctrl, Alt and - simultaneously.		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	J14	J15
512KB	(18) 41256	None	Closed	Closed
640KB	(18) 41256	(18) 4164	Closed	Open
1MB	(18) 41256	(18) 41256	Open	Closed
Note: Do not allow both J14 and J15 to be open at the same time.				