


LONGSHINE MICROSYSTEM, INC.
LCS-6611/W

Q3/94

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drive supported: Two MFM ST506/412 drives
Floppy drives supported: None

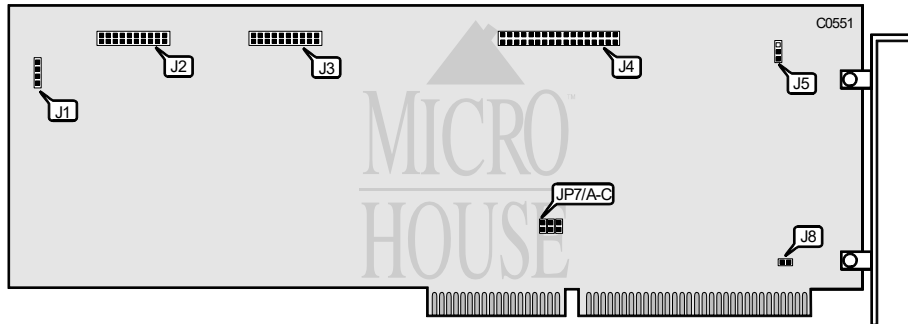

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	J1
20-pin data cable connector - drive 1	J2
20-pin data cable connector - drive 0	J3
34-pin control cable connector - hard drive	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive primary address select	J5	pins 1 & 2 closed
Hard drive alternate address select	J5	pins 2 & 3 closed
í Hard drive LED in latch mode	J7/A	open
Hard drive LED in non-latch mode	J7/A	closed
í Factory configured - do not alter	J7/B	open
í Hard drive incompatible with WD1003-WAH	J7/C	open
Hard drive compatible with WD1003-WAH	J7/C	closed
í Bracket and ground are unconnected	J8	open
Bracket and ground are connected	J8	closed