


# LONGSHINE MICROSYSTEM, INC. LCS 6623

Data bus: 16-bit ISA  
 Size: Mid-length, full-height card  
 Hard drive supported: Two IDE (AT) Interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

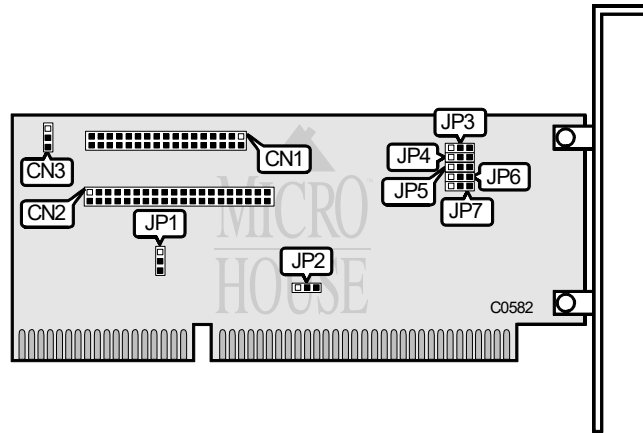

CONNECTIONS	
Function	Location
40-pin IDE (AT) Interface connector	CN1
34-pin control cable connector floppy drive	CN2
2-pin connector - Drive active LED	CN3

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
i IRQ14 enabled	JP1	Pins 2 & 3 closed	
i IRQ14 disabled	JP1	Pins 1 & 2 closed	
i IOCHRDY enabled	JP2	Pins 2 & 3 closed	
i IOCHRDY disabled	JP2	Pins 1 & 2 closed	
i Reserved	JP3	Pins 1 & 2 closed	
Reserved invalid	JP3	Pins 2 & 3 closed	
i Floppy disk address - Primary	JP4	Pins 1 & 2 closed	
Floppy disk address - Secondary	JP4	Pins 2 & 3 closed	
i Floppy disk enabled	JP5	Pins 1 & 2 closed	
Floppy disk disabled	JP5	Pins 2 & 3 closed	
i Hard disk enabled	JP6	Pins 1 & 2 closed	
Hard disk disabled	JP6	Pins 2 & 3 closed	
i Hard disk address Primary	JP7	Pins 1 & 2 closed	
Hard disk address Secondary	JP7	Pins 2 & 3 closed	