


## UNIDENTIFIED

### 386SX-33

<b>Processor</b>	80386SX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

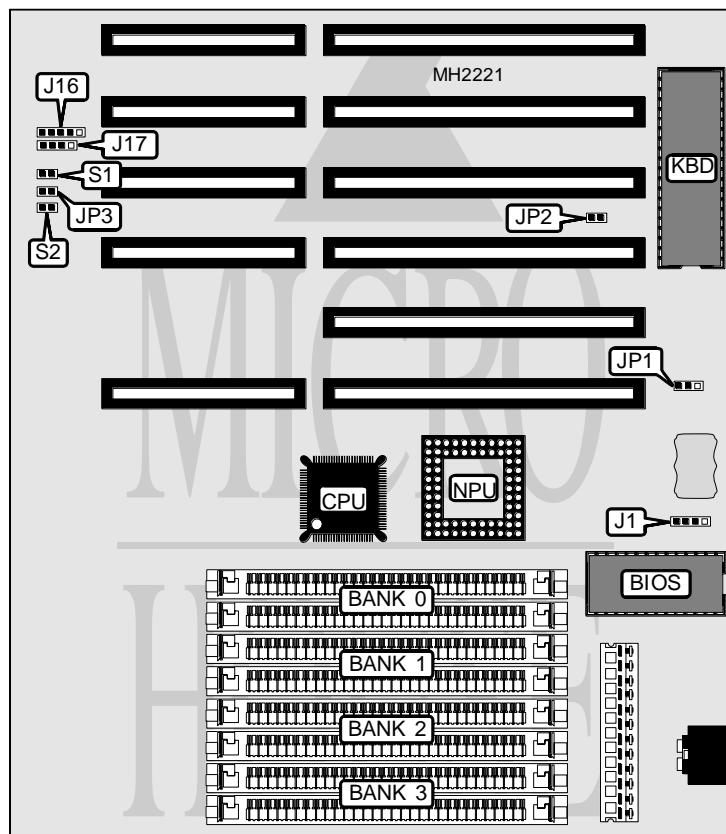

#### CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	JP3
Power LED & keylock	J16	Turbo switch	S1
Speaker	J17	Reset switch	S2

*Continued next page...*

**UNIDENTIFIED****386SX-33***... continued from previous page***USER CONFIGURABLE SETTINGS**

Function	Jumper	Position
í Battery type select internal	JP1	pins 1 & 2 closed
Battery type select external	JP1	pins 2 & 3 closed
í Factory configured - do not alter	JP2	Open

**DRAM CONFIGURATION**

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE