


LONGSHINE MICROSYSTEM, INC.
LCS-6624U, LCS-6624UG VER. 2

Q4/94

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

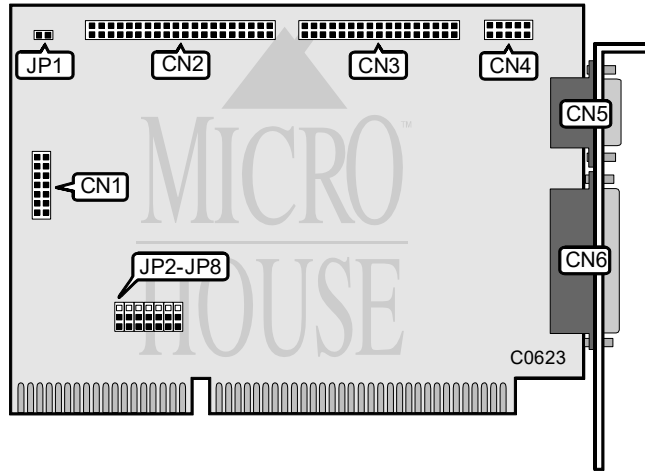

CONNECTIONS	
Function	Location
Game port	CN1
40-pin IDE (AT) Interface connector	CN2
34-pin control cable connector - floppy drive	CN3
10-pin serial port 2 -internal	CN4
9-pin serial port 1 - external	CN5
25-pin parallel port	CN6
2-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Serial port 1 enabled	JP2	Pins 1 & 2 closed
Serial port 1 disabled	JP2	Pins 2 & 3 closed
Game port enabled	JP3	Pins 1 & 2 closed
Game port disabled	JP3	Pins 2 & 3 closed
Primary floppy drive address selected	JP4	Pins 1 & 2 closed
Secondary floppy drive address selected	JP4	Pins 2 & 3 closed
Parallel port is LPT2	JP5	Pins 1 & 2 closed
Parallel port is LPT3	JP5	Pins 2 & 3 closed

Continued on next page . . .

LONGSHINE MICROSYSTEM, INC.
LCS-6624U, LCS-6624UG VER. 2

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í IDE port enabled	JP6	Pins 1 & 2 closed
IDE port disabled	JP6	Pins 2 & 3 closed
Serial port 2 enabled	JP7	Pins 1 & 2 closed
Serial port 2 disabled	JP7	Pins 2 & 3 closed
í Primary address for serial ports selected	JP8	Pins 1 & 2 closed
Secondary address for serial ports selected	JP8	Pins 2 & 3 closed