


# UNIDENTIFIED 640K SYSTEM BOARD

|                          |               |
|--------------------------|---------------|
| <b>Processor</b>         | 8088          |
| <b>Processor Speed</b>   | 10MHz         |
| <b>Chip Set</b>          | Unidentified  |
| <b>Max. Onboard DRAM</b> | 640KB         |
| <b>Cache</b>             | None          |
| <b>BIOS</b>              | Unidentified  |
| <b>Dimensions</b>        | 330mm x 218mm |
| <b>I/O Options</b>       | None          |
| <b>NPU Options</b>       | 8087          |

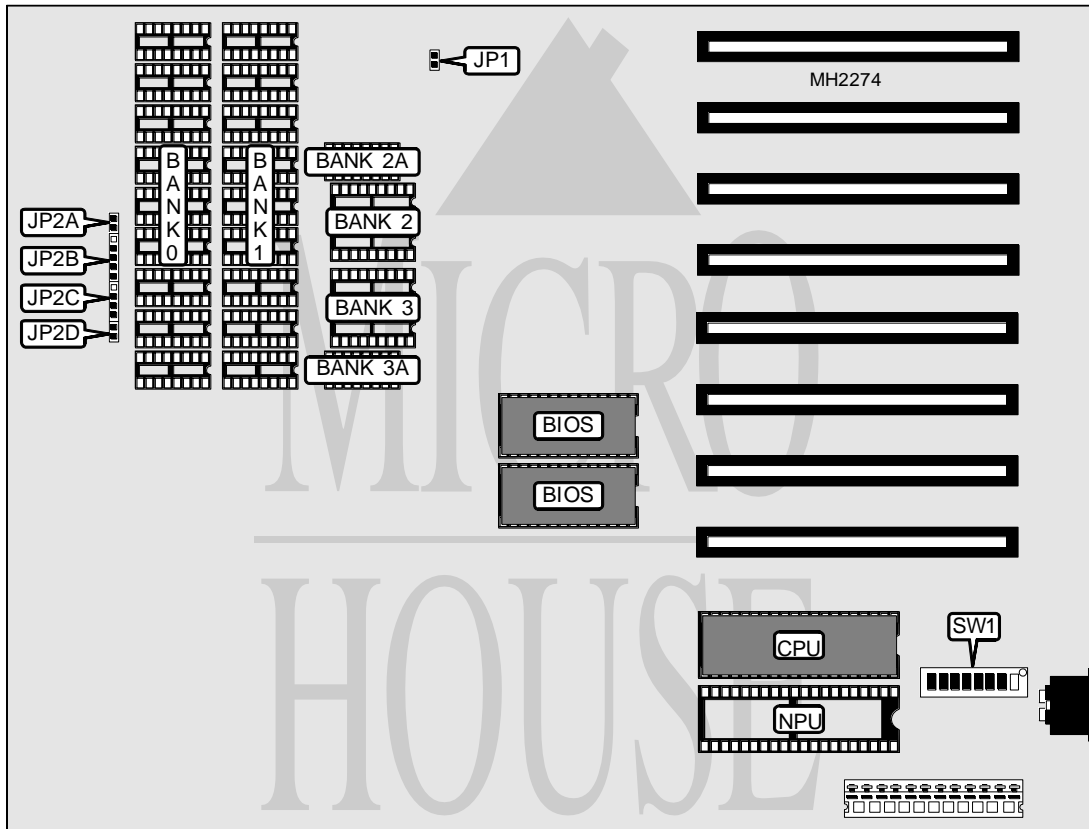

| CONNECTIONS         |          |              |          |
|---------------------|----------|--------------|----------|
| Purpose             | Location | Purpose      | Location |
| Turbo switch        | JP1      | Speaker      | JP2C     |
| Turbo LED           | JP2A     | Reset switch | JP2D     |
| Power LED & keylock | JP2B     |              |          |

*Continued on next page. . .*

# UNIDENTIFIED 640K SYSTEM BOARD

... continued from previous page

| USER CONFIGURABLE SETTINGS          |        |          |
|-------------------------------------|--------|----------|
| Function                            | Switch | Position |
| í Factory configured - do not alter | SW1/1  | Off      |
| í NPU disabled                      | SW1/2  | On       |
| NPU enabled                         | SW1/2  | Off      |
| í Factory configured - do not alter | SW1/3  | Off      |
| í Factory configured - do not alter | SW1/4  | Off      |

| DRAM CONFIGURATION |           |           |          |          |          |          |
|--------------------|-----------|-----------|----------|----------|----------|----------|
| Size               | Bank 0    | Bank 1    | Bank 2   | Bank 2A  | Bank 3   | Bank 3A  |
| 256KB              | (9) 41256 | NONE      | NONE     | NONE     | NONE     | NONE     |
| 512KB              | (9) 41256 | (9) 41256 | NONE     | NONE     | NONE     | NONE     |
| 576KB              | (9) 41256 | (9) 41256 | (2) 4464 | (1) 4164 | NONE     | NONE     |
| 640KB              | (9) 41256 | (9) 41256 | (2) 4464 | (1) 4164 | (2) 4464 | (1) 4164 |

| DISPLAY ADAPTER SWITCH CONFIGURATION |       |       |
|--------------------------------------|-------|-------|
| Size                                 | SW1/5 | SW1/6 |
| None installed                       | On    | On    |
| Color (40 x 20)                      | Off   | On    |
| Color (80 x 25)                      | On    | Off   |
| Monochrome                           | Off   | Off   |

| FLOPPY DRIVE SWITCH CONFIGURATION |       |       |
|-----------------------------------|-------|-------|
| Drives installed                  | SW1/7 | SW1/8 |
| 1                                 | On    | On    |
| 2                                 | Off   | On    |
| 3                                 | On    | Off   |
| 4                                 | Off   | Off   |