


AUVA COMPUTER, INC. JUKO BABY XT BXM/12

Processor 8088/V-20
Processor Speed 4.77/10/12MHz
Chip Set Unidentified
Max. Onboard DRAM 1MB
Cache None
BIOS Phoenix
Dimensions 220mm x 210mm
I/O Options None
NPU Options 8087

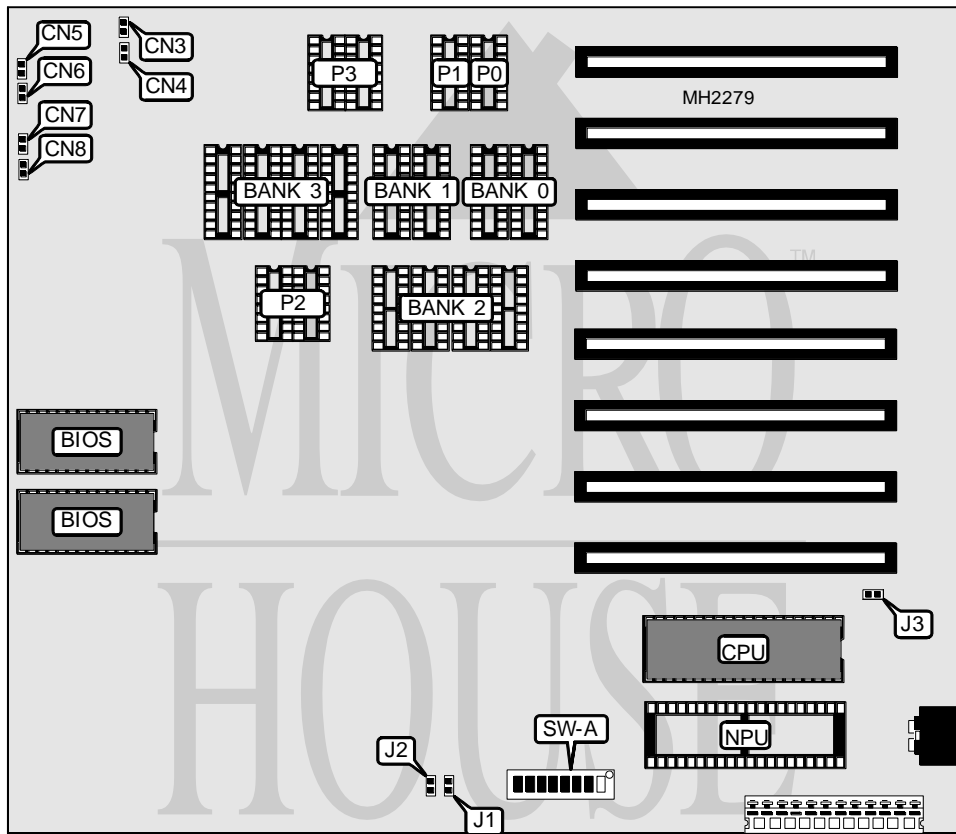

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED	CN3	Keylock	CN6
Reset switch	CN4	Turbo LED	CN7
Speaker	CN5	Turbo switch	CN8

Continued on next page. . .

AUVA COMPUTER, INC.
JUKO BABY XT BXM/12

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	J1	N/A
í Wait state select/0 wait	J2	Open
Wait state select/1 wait	J2	Closed
í Parity check enabled	SW-A/1	Off
Parity check disabled	SW-A/1	On
í NPU disabled	SW-A/2	On
NPU enabled	SW-A/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(2) 44256	NONE	NONE	NONE
512KB	(2) 44256	(2) 44256	NONE	NONE
640KB	(2) 44256	(2) 44256	(4) 4464	NONE
1MB	(2) 44256	(2) 44256	NONE	(4) 44256

DRAM PARITY CONFIGURATION				
Size	P0	P1	P2	P3
256KB	(1) 41256	NONE	NONE	NONE
512KB	(1) 41256	(1) 41256	NONE	NONE
640KB	(1) 41256	(1) 41256	(2) 4164	NONE
1MB	(1) 41256	(1) 41256	NONE	(2) 41256

DRAM SWITCH CONFIGURATION		
Size	SW-A/3	SW-A/4
256KB	Off	On/Off
512KB	N/A	N/A
640KB	On	Off
1MB	Off	Off

Note: Switch configuration for 512KB may be any setting except On/On.

CPU TYPE/SPEED CONFIGURATION		
Type	Speed	J3
8088	10MHz	Closed
V-20	12MHz	Open

VIDEO CONFIGURATION		
Display	SW-A/5	SW-A/6
MGA	Off	Off
CGA 40 x 25	Off	On
CGA 80 x 25	On	Off
None installed	On	On

Continued on next page. . .

AUVA COMPUTER, INC.
JUKO BABY XT BXM/12

... continued from previous page

FLOPPY DRIVE CONFIGURATION		
Number of drives	SW-A/7	SW-A/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off