


LONGSHINE MICROSYSTEM, INC.  
LCS-6620TX REV. 2

Q2/95

Data bus: 16-bit, ISA  
 Size: Full-length, full-height card  
 Hard drive supported: Two ST506/412 (MFM) drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

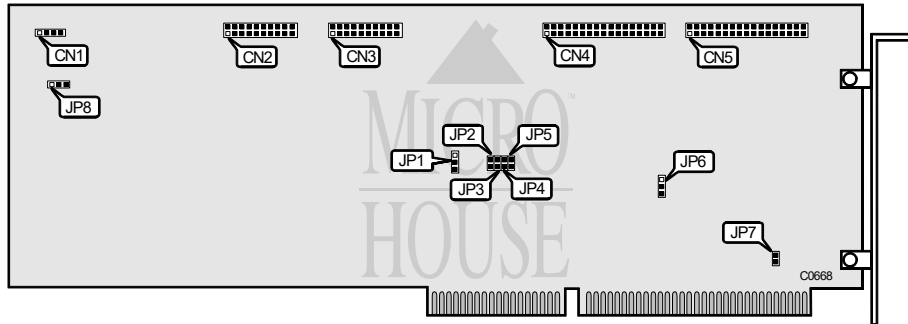

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	CN1
20-pin data cable connector - drive 0	CN2
20-pin data cable connector - drive 1	CN3
34-pin control cable connector - hard drive	CN4
34-pin control cable connector - floppy drive	CN5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured setting - do not alter	JP1	N/A
í Factory configured setting - do not alter	JP2	N/A
í Hard disk address - (1F0-1F7h) primary	JP3	open
Hard disk address - (170-177h) secondary	JP3	closed
í BIOS all others	JP5	closed
BIOS DTK	JP5	open
í Card ground not tied to system case	JP7	open
Card ground tied to system case	JP7	closed
í Factory configured setting	JP8	pins 2 & 3 closed
Fuji 3.5" hard disk drive	JP8	pins 1 & 2 closed

FLOPPY DRIVE ADDRESS SELECT		
Setting	JP4	JP6
í Primary (3F0-3F7h)	open	pins 2 & 3 closed
Secondary (370-377h)	closed	pins 1 & 2 closed