


BOCA RESEARCH, INC. IDE PLUS (VER. 3)

Q2/95

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

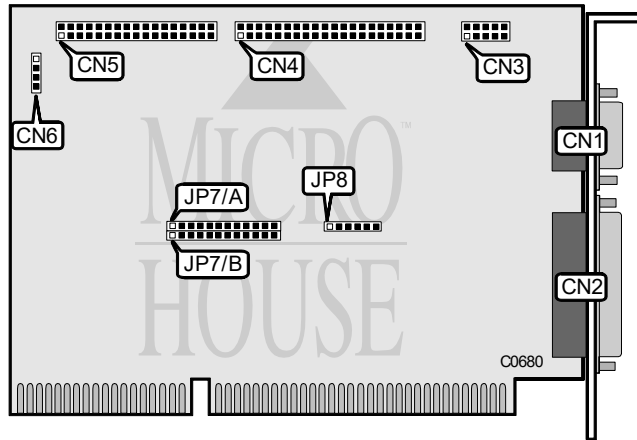

| CONNECTIONS | |
|---|----------|
| Function | Location |
| 9-pin serial port - external | CN1 |
| 25-pin parallel port (LPT1/2) - external | CN2 |
| 10-pin serial port (COM2/4) - internal | CN3 |
| 40-pin IDE (AT) Interface connector | CN4 |
| 34-pin control cable connector - floppy drive | CN5 |
| 4-pin connector - drive active LED | CN6 |

Continued on next page . . .

BOCA RESEARCH, INC.
IDE PLUS (VER. 3)

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|------------------------------|----------|---------------------|
| Function | Location | Setting |
| Serial port 1 - COM1 | JP7/B | pins 1 & 2 closed |
| Serial port 1 - COM2 | JP7/B | pins 2 & 3 closed |
| Serial port 1 - COM3 | JP7/B | pins 4 & 5 closed |
| Serial port 1 - COM4 | JP7/B | pins 5 & 6 closed |
| Serial port 1 - IRQ7 | JP7/B | pins 7 & 8 closed |
| Serial port 1 - IRQ5 | JP7/B | pins 8 & 9 closed |
| Serial port 1 - IRQ4 | JP7/B | pins 10 & 11 closed |
| Serial port 1 - IRQ3 | JP7/B | pins 11 & 12 closed |
| Serial port 2 - COM1 | JP7/A | pins 1 & 2 closed |
| Serial port 2 - COM2 | JP7/A | pins 2 & 3 closed |
| Serial port 2 - COM3 | JP7/A | pins 4 & 5 closed |
| Serial port 2 - COM4 | JP7/A | pins 5 & 6 closed |
| Serial port 1 - IRQ7 | JP7/A | pins 7 & 8 closed |
| Serial port 1 - IRQ5 | JP7/A | pins 8 & 9 closed |
| Serial port 1 - IRQ4 | JP7/A | pins 10 & 11 closed |
| Serial port 1 - IRQ3 | JP7/A | pins 11 & 12 closed |
| Parallel port address - 378h | JP8 | pins 1 & 2 closed |
| Parallel port address - 278h | JP8 | pins 2 & 3 closed |
| Parallel port IRQ7 | JP8 | pins 4 & 5 closed |
| Parallel port IRQ5 | JP8 | pins 5 & 6 closed |