


# FUJIKAMA USA, INC.

## PEAK/DM-386

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25/33/40MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	32/64/128KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX/3167

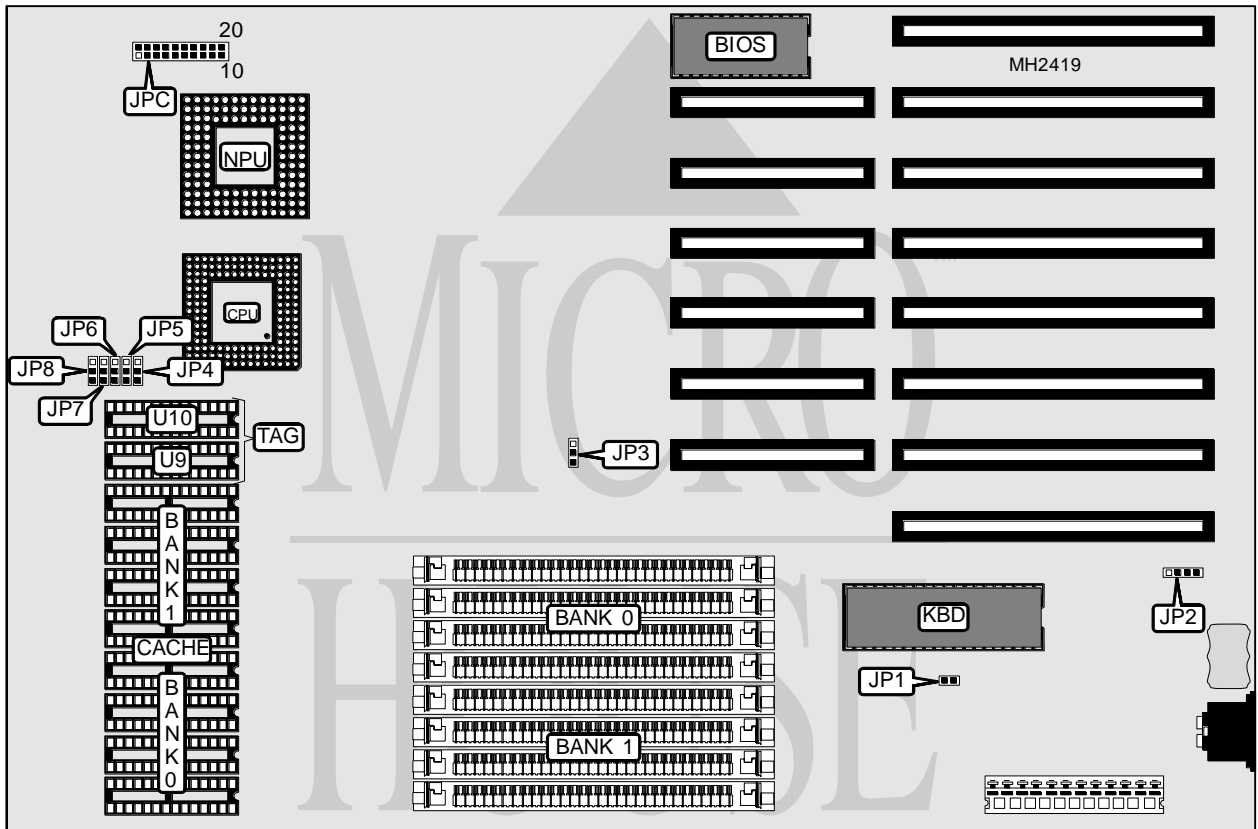

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	JPC (pins 1 - 5)	Turbo switch	JPC (pins 15 - 7)
Speaker	JPC (pins 6 - 10)	Reset switch	JPC (pins 19 - 20)
Turbo LED	JPC (pins 12 - 13)	External battery	JP2

Continued on next page. . .

**FUJIKAMA USA, INC.**  
**PEAK/DM-386**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í Memory type select same type in Bank 0 & Bank 1	JP3	pins 1 & 2 closed
Memory type select different type in Bank 0 & Bank 1	JP3	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG (U9)	TAG (U10)
32KB	(4) 8K x 8	NONE	NONE	(1) 8K x 8
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	NONE	(1) 32K x 8

CACHE JUMPER CONFIGURATION					
Size	JP4	JP5	JP6	JP7	JP8
32KB	2 & 3	2 & 3	2 & 3	1 & 2	1 & 2
64KB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
128KB	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.