


# FIRST INTERNATIONAL COMPUTER, INC. MIO-V (16-BIT VERSION)

Q1/95

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Two IDE (AT) interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

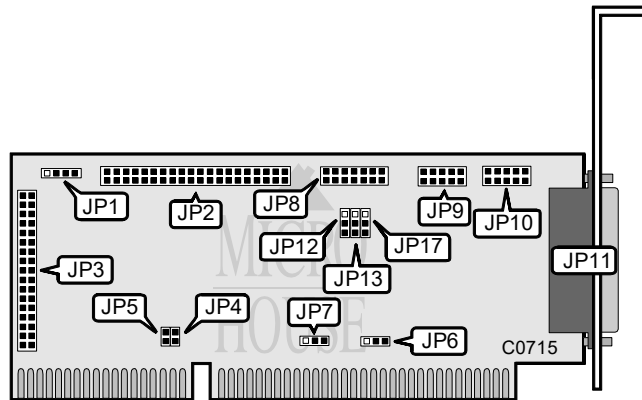

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	JP1
40-pin IDE (AT) Interface connector	JP2
34-pin control cable connector - floppy drive	JP3
Game port	JP8
10-pin serial port 2	JP9
10-pin serial port 1	JP10
25-pin parallel port	JP11

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
if Floppy drive enabled	JP17	pins 1 & 2 closed
Floppy drive disabled	JP17	pins 2 & 3 closed

IDE PORT		
Setting	JP4	JP5
if Enabled	losed	open
Disabled	open	open

Continued on next page . . .

FIRST INTERNATIONAL COMPUTER, INC.  
MIO-V (16-BIT VERSION)

... continued from previous page

SERIAL PORTS 1 & 2 CONFIGURATION			
Port 1	Port 2	JP6	JP7
i COM1	COM2	pins 1 & 2 closed	pins 1 & 2 closed
COM3	COM4	pins 1 & 2 closed	pins 2 & 3 closed
COM1	COM4	pins 2 & 3 closed	pins 1 & 2 closed
COM2	COM3	pins 2 & 3 closed	pins 2 & 3 closed

PARALLEL PORT CONFIGURATION		
LPT	JP12	JP13
i LPT1	pins 1 & 2 closed	pins 1 & 3 closed
LPT2	pins 1 & 2 closed	pins 1 & 2 closed
LPT3	pins 1 & 3 closed	pins 1 & 2 closed
Disabled	pins 1 & 3 closed	pins 1 & 3 closed