


LONGSHINE COMPUTERS, INC.
LCS-6617

Q1/95

Data bus: 16-bit, ISA
 Size: Full-length, full-height card
 Hard drive supported: Two RLL ST506/412 drives
 Floppy drives supported: None

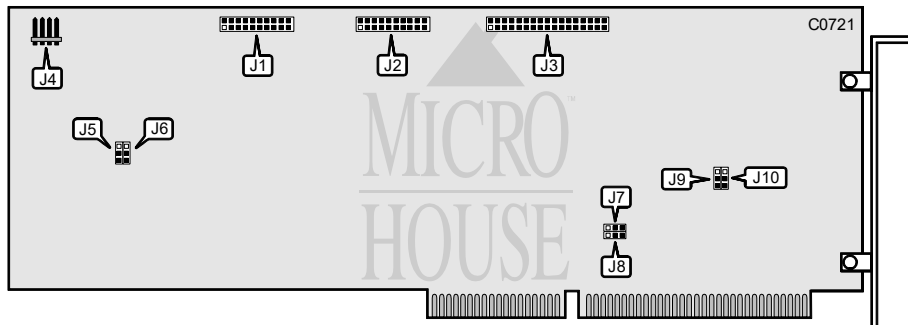

CONNECTIONS	
Function	Location
20-pin data cable connector - drive 1	J1
20-pin data cable connector - drive 2	J2
34-pin control cable connector - hard drive	J3
4-pin connector - drive active LED	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f 1:2 interleave ratio selected	J5	pins 1 & 2 closed
1:3 interleave ratio selected	J5	pins 2 & 3 closed
f DOS compatibility selected	J6	pins 2 & 3 closed
XENIX and DOS compatibility selected	J6	pins 1 & 2 closed
f C & T chipset installed	J7	pins 1 & 2 closed
Other chipset installed	J7	pins 2 & 3 closed
f HDD address = 1F0h	J8	pins 1 & 2 closed
HDD address = 170h	J8	pins 2 & 3 closed

BIOS CONFIGURATION		
Address	J9	J10
f C800h	pins 2 & 3 closed	pins 2 & 3 closed
D800h	pins 2 & 3 closed	pins 2 & 3 closed
Disabled	N/A	pins 2 & 3 closed