


## UNIDENTIFIED

## ACE - 386SX - AR1

<b>Processor</b>	80386SX (exact location unknown)
<b>Processor Speed</b>	16/20/25/33MHz
<b>Chip Set</b>	Acer
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX (exact location unknown)

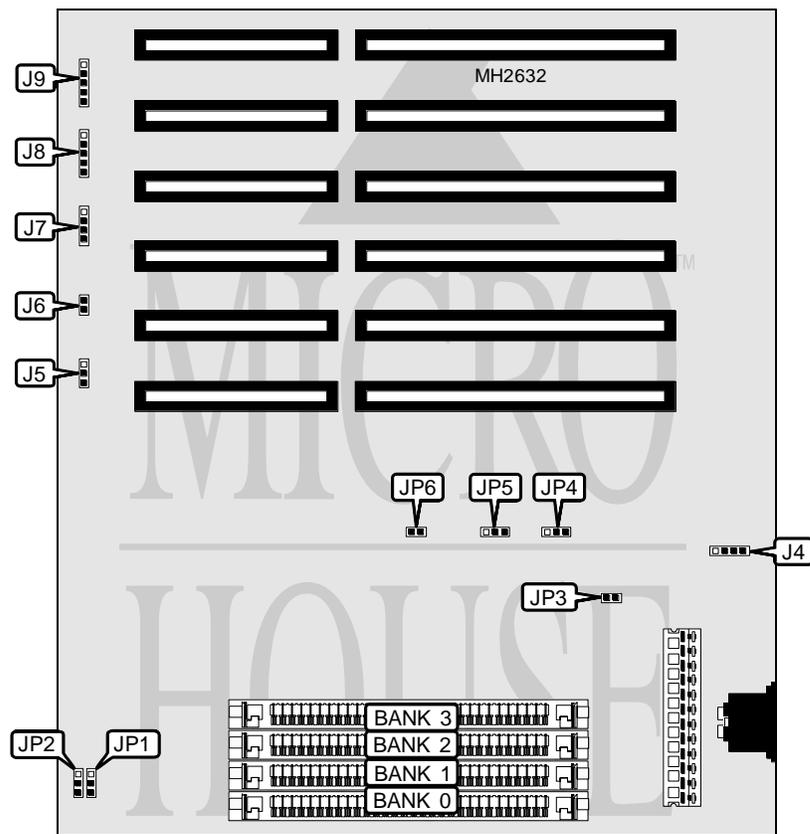

## CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J4	Turbo switch	J8 pins 1 - 3
Reset switch	J6	Turbo LED	J8 pins 4 - 5
Speaker	J7	Power LED & keylock	J9

Continued on next page. . .

## UNIDENTIFIED

## ACE - 386SX - AR1

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í ADS delay disabled	J5	pins 2 & 3 closed
ADS delay enabled	J5	pins 1 & 2 closed
í NPU synchronous with CPU	JP2	pins 1 & 2 closed
NPU asynchronous with CPU	JP2	pins 2 & 3 closed
í Factory configured - do not alter	JP3	N/A
í Monitor type select monochrome	JP4	pins 1 & 2 closed
Monitor type select color	JP4	pins 2 & 3 closed
í Parity check disabled	JP6	Open
Parity check enabled	JP6	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(1) 256K x 9	(1) 256K x 9	NONE	NONE
1MB	(1) 256K x 9			
2MB	(1) 1M x 9	(1) 1M x 9	NONE	NONE
4MB	(1) 1M x 9			
8MB	(1) 4M x 9	(1) 4M x 9	NONE	NONE
16MB	(1) 4M x 9			

CPU SPEED CONFIGURATION		
Speed	JP1	JP5
16MHz	pins 1 & 2 closed	pins 1 & 2 closed
20MHz	pins 2 & 3 closed	pins 1 & 2 closed
25MHz	pins 1 & 2 closed	pins 2 & 3 closed
33MHz	pins 2 & 3 closed	pins 2 & 3 closed