


MICRO EQUIPMENT CORPORATION UN-1063

Q2/95

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

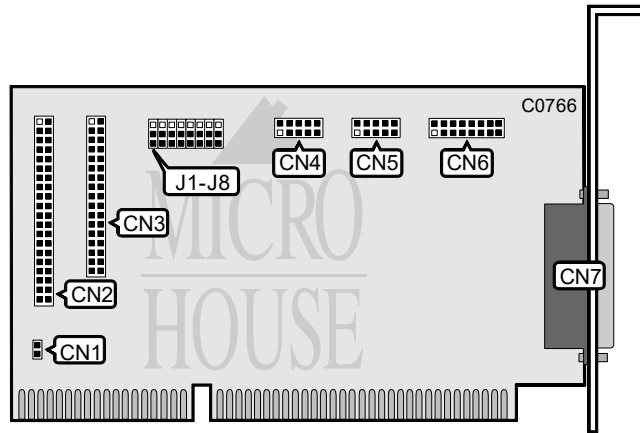

CONNECTIONS	
Function	Location
2-pin connector - drive active LED	CN1
40-pin IDE (AT) interface connector	CN2
34-pin control cable connector - floppy drive	CN3
10-pin serial port 1	CN4
10-pin serial port 2	CN5
Game port	CN6
25-pin parallel port	CN7

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Hard drive enabled	J1	pins 1 & 2 closed
	J1	pins 2 & 3 closed
i Floppy drive enabled	J2	pins 1 & 2 closed
	J2	pins 2 & 3 closed

SERIAL PORT 1 CONFIGURATION		
COM/Address	J5	J6
i COM1/3F8h	pins 1 & 2 closed	pins 1 & 2 closed
C COM3/3E8h	pins 1 & 2 closed	pins 1 & 3 closed
Disabled	pins 1 & 3 closed	n/a

Continued on next page . . .

MICRO EQUIPMENT CORPORATION
UN-1063

... continued from previous page

SERIAL PORT 2 CONFIGURATION		
COM/Address	J3	J4
COM2/2F8h	pins : & 2 closed	pins : & 2 closed
COM4/2E8h	pins : & 2 closed	pins : & 3 closed
Disabled	pins : & 3 closed	n/a

PARALLEL PORT CONFIGURATION		
LPT/Address	J7	J8
LPT1/378h	pins : & 2 closed	pins : & 2 closed
LPT2/278h	pins : & 2 closed	pins : & 3 closed
Disabled	pins : & 3 closed	n/a