


MICRO EQUIPMENT CORPORATION UN-1068

Q2/95

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE (AT) interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

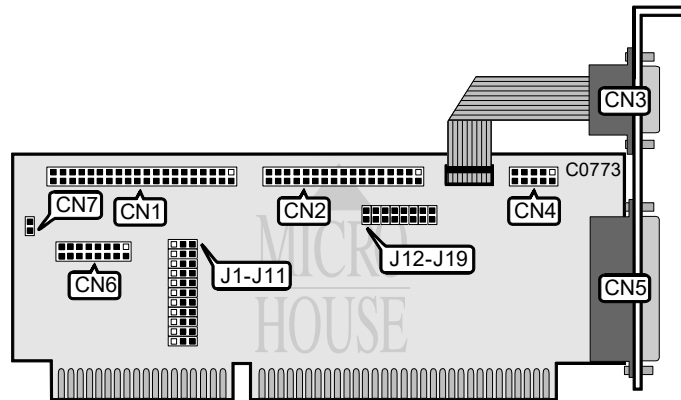

CONNECTIONS	
Function	Location
40-pin IDE (AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
9-pin serial port 1 - external	CN3
10-pin serial port 2 - internal	CN4
25-pin parallel port	CN5
Game port	CN6
2-pin connector - drive active LED	CN7

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Game port enabled	J11	pins 2 & 3 closed
Game port disabled	J11	pins 1 & 2 closed

FLOPPY DRIVE CONFIGURATION		
Address	J1	J2
i 3F0h	pins : & 3 closed	pins : & 3 closed
370h	pins : & 3 closed	pins & 2 closed
isabled	pins & 2 closed	n/a

Continued on next page . . .

MICRO EQUIPMENT CORPORATION
UN-1068

... continued from previous page

IDE PORT CONFIGURATION			
Address		J3	J4
í	3F6h	pins : & 3 closed	pins : & 3 closed
	376h	pins : & 3 closed	pins : & 2 closed
	Disabled	pins : & 2 closed	n/a

SERIAL PORT 1 CONFIGURATION			
COM/Address		J5	J6
í	C)M1/3F8h	pins : & 3 closed	pins : & 3 closed
	C)M3/3E8h	pins : & 3 closed	pins : & 2 closed
	Disabled	pins : & 2 closed	n/a

SERIAL PORT 1 INTERRUPT SELECT			
IRQ	J12	J13	J14
í	IRQ4	closed	open
	IRQ3	open	closed
	IRQ5	open	open
	Disabled	open	open

SERIAL PORT 2 CONFIGURATION			
COM/Address		J7	J8
í	C)M2/2F8h	pins : & 3 closed	pins : & 3 closed
	C)M4/2E8h	pins : & 3 closed	pins : & 2 closed
	Disabled	pins : & 2 closed	n/a

SERIAL PORT 2 INTERRUPT SELECT			
IRQ	J15	J16	J17
í	IRQ3	closed	open
	IRQ4	open	closed
	IRQ5	open	open
	Disabled	open	open

PARALLEL PORT CONFIGURATION			
LPT/Address		J9	J10
í	L)T1/378h	pins : & 3 closed	pins : & 3 closed
	L)T2/278h	pins : & 3 closed	pins : & 2 closed
	Disabled	pins : & 2 closed	n/a

PARALLEL PORT INTERRUPT SELECT			
IRQ	J18	J19	
í	IRQ7	losed	
	IRQ5	open	
	Disabled	open	