


# MICRO EQUIPMENT CORPORATION UN-105

Q3/95

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Two IDE (AT) Interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB drives

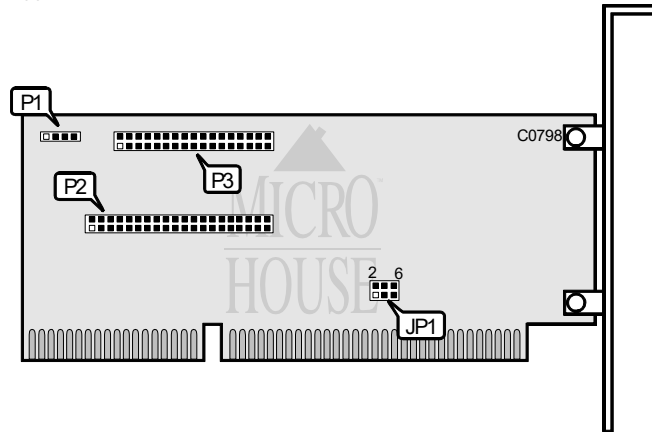

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	P1
40-pin IDE(AT) interface connector	P2
34-pin connector - floppy drive	P3

FLOPPY DRIVE/IDE INTERFACE CONFIGURATION		
Floppy Drive interface (P3)	IDE(AT) interface (P2)	JP1
Primary interface in system	Primary interface in system	pins 1 & 3, 2 & 4 closed
Primary interface in system	Secondary interface in system	pins 3 & 5, 4 & 6 closed
Secondary interface in system	Primary interface in system	pins 2 & 4, 3 & 5 closed
Secondary interface in system	Secondary interface in system	pins 1 & 3, 4 & 6 closed