


# SOFTSYS COMPUTER CENTERS, INC. TURBO - V4

**Processor** 8088 (exact location unknown)  
**Processor Speed** 8MHz  
**Chip Set** Unidentified  
**Max. Onboard DRAM** 640KB  
**Cache** None  
**BIOS** Unidentified  
**Dimensions** 330mm x 218mm  
**I/O Options** None  
**NPU Options** 8087 (exact location unknown)

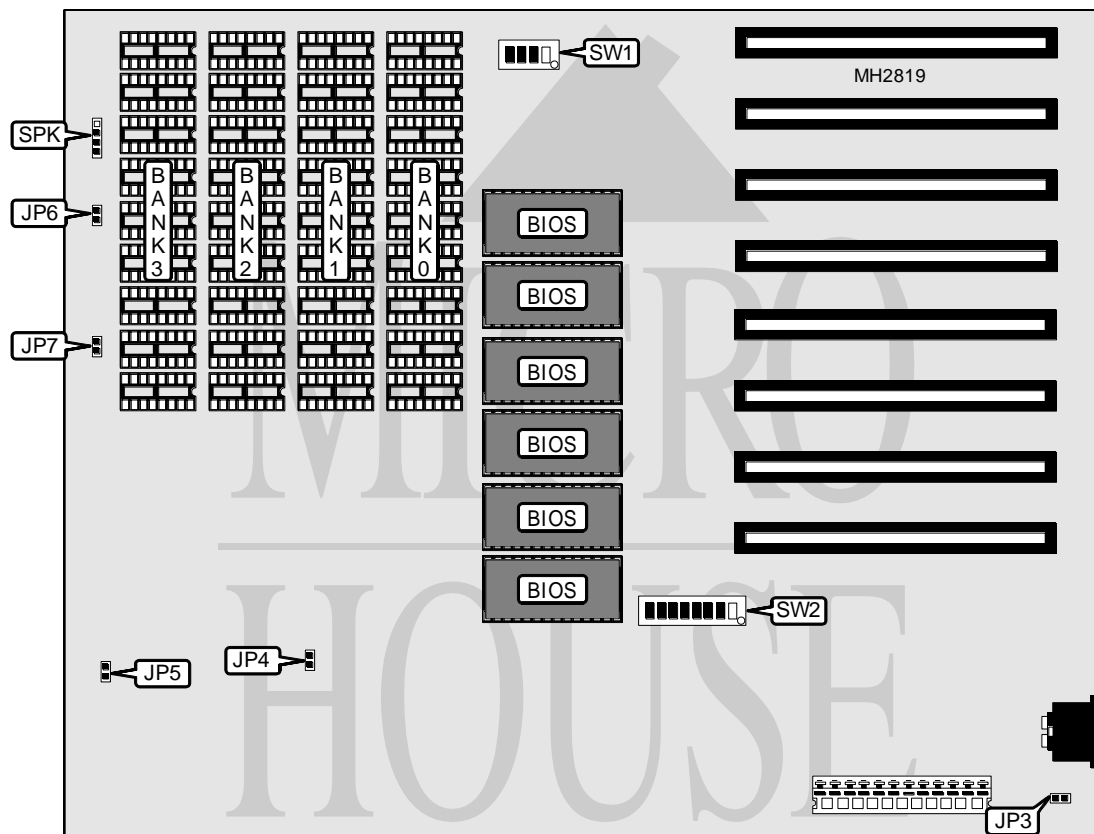

CONNECTIONS			
Purpose	Location	Purpose	Location
Keylock	JP3	Power LED	JP7
Turbo switch	JP5	Speaker	SPK
LED counter	JP6		

Continued on next page. . .

**SOFTSYS COMPUTER CENTERS, INC.**  
**TURBO - V4**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Softswitch enabled	JP4	Open
Softswitch disabled	JP4	Closed
í Factory configured - do not alter	SW1/3	N/A
í Factory configured - do not alter	SW1/4	N/A
í Self test disabled	SW2/1	On
Self test enabled	SW2/1	Off
í NPU disabled	SW2/2	On
NPU enabled	SW2/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64KB	(9) 4164	NONE	NONE	NONE
128KB	(9) 4164	(9) 4164	NONE	NONE
192KB	(9) 4164	(9) 4164	(9) 4164	NONE
256KB	(9) 4164	(9) 4164	(9) 4164	(9) 4164
448KB	(9) 41256	(9) 4164	(9) 4164	(9) 4164
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164
640KB	(9) 41256	(9) 41256	(9) 41256	NONE

DRAM SWITCH CONFIGURATION				
Size	SW1/1	SW1/2	SW2/3	SW2/4
64KB	N/A	N/A	On	On
128KB	N/A	N/A	Off	On
192KB	N/A	N/A	On	Off
256KB	On	On	Off	Off
448KB	On	Off	N/A	N/A
640KB	Off	On	N/A	N/A
640KB	Off	Off	N/A	N/A

VIDEO CONFIGURATION		
Type	SW2/5	SW2/6
None	On	On
Monochrome	Off	Off
40 x 25 color	Off	On
80 x 25 color	On	Off

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW2/7	SW2/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off