


DATA TECHNOLOGY CORPORATION DTC2183 (400XXX-89A)

Q4/95

Data bus: 16-bit ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE(AT) interface devices
 Floppy drives supported: None

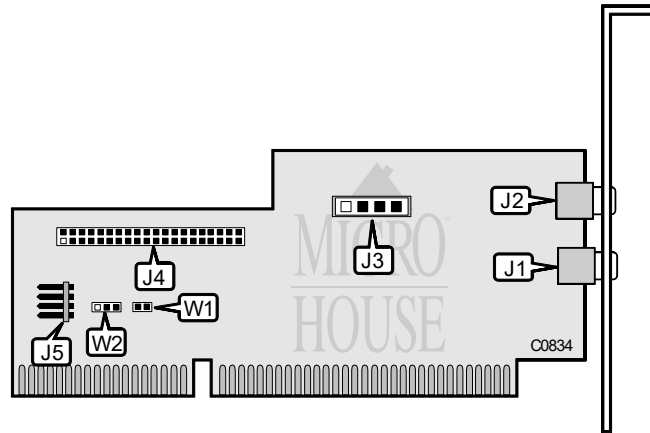

CONNECTIONS	
Function	Location
Right channel audio out	J1
Left channel audio out	J2
CD-ROM audio in	J3
40-pin IDE(AT) interface connector	J4
4-pin drive active LED	J5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
IDE(AT) interface secondary address is 170h	W1	closed
IDE(AT) interface primary address is 1F0h	W1	open
Hard drive interrupt IRQ15 select	W2	pins 2 & 3 closed
Hard drive interrupt IRQ14 select	W2	pins 1 & 2 closed

MISCELLANEOUS TECHNICAL NOTES
The DTC 2183 can coexist with ST506/412(MFM), ST506/412(RLL), ESDI, SCSI and IDE controllers. Supports ATAPI IDE CD-ROM drives.