


OGIVAR, INC.
286 9B-10

Processor	80286 (exact location unidentified)
Processor Speed	8/10MHz
Chip Set	Unidentified
Max. Onboard DRAM	1MB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

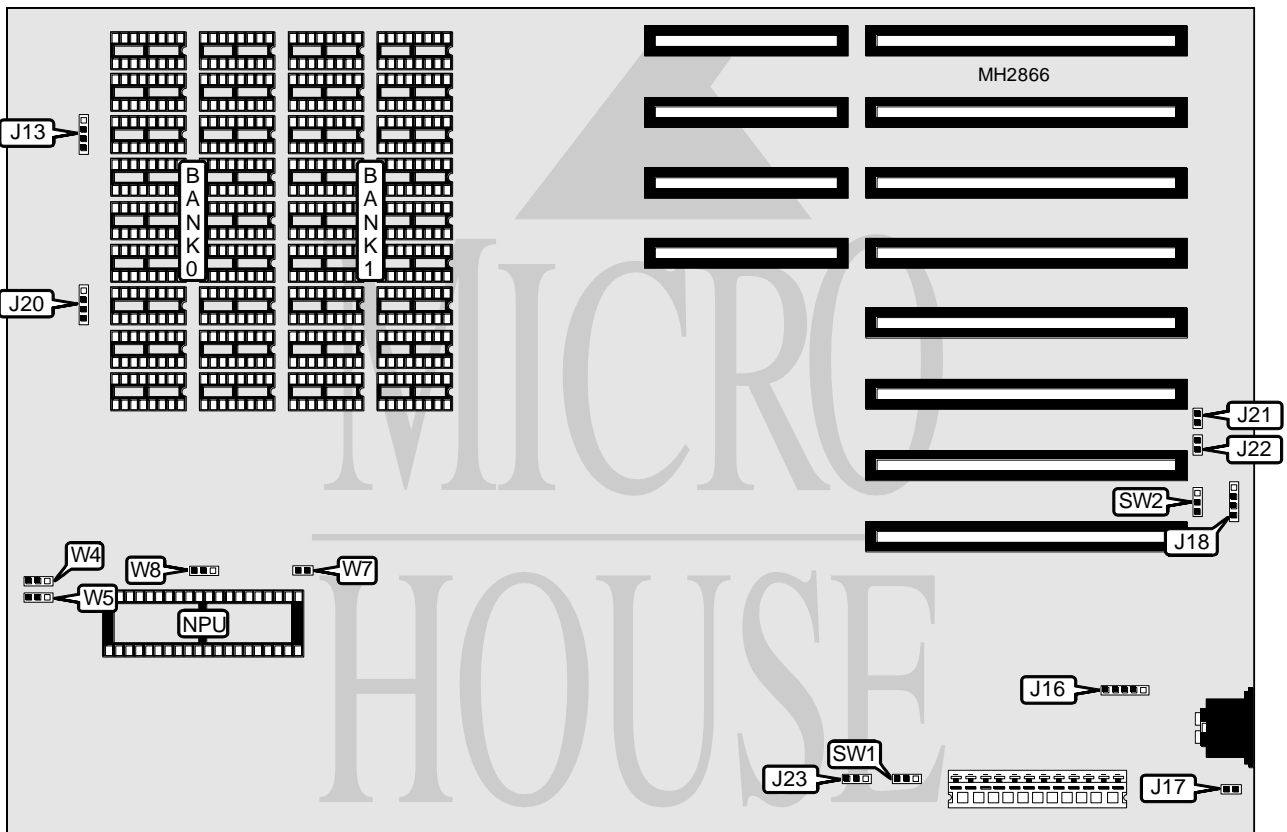

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J13	External battery	J18
External keyboard connector	J16	Turbo switch	J20
Reset switch	J17		

Continued on next page. . .

OGIVAR, INC.

286 9B - 10

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J23	pins 1 & 2 closed
CMOS memory clear	J23	pins 2 & 3 closed
í CPU speed select low	SW1	pins 1 & 2 closed
CPU speed select high	SW1	Open
CPU speed select logical	SW1	pins 2 & 3 closed
í Monitor type select color	SW2	pins 1 & 2 closed
Monitor type select monochrome	SW2	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(18) 4164	(18) 4164
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION		
Size	W4	W5
256KB	pins 1 & 2 closed	pins 1 & 2 closed
512KB	pins 2 & 3 closed	pins 1 & 2 closed
640KB	pins 1 & 2 closed	pins 2 & 3 closed
1MB	pins 2 & 3 closed	pins 2 & 3 closed

NPU SPEED CONFIGURATION		
Speed	W7	W8
8MHz	Closed	pins 1 & 2 closed
10MHz	Open	pins 2 & 3 closed

BATTERY TYPE CONFIGURATION		
Type	J21	J22
3v lithium	Closed	Open
6v lithium	Open	Closed
6v alkaline	Open	Open