


DATA TECHNOLOGY CORPORATION
DTC3150V (900142-89XX)

Q4/95

Data bus: 8-bit ISA
 Size: Half-length, half-height card
 Hard drive supported: Up to seven SCSI devices
 Floppy drives supported: None

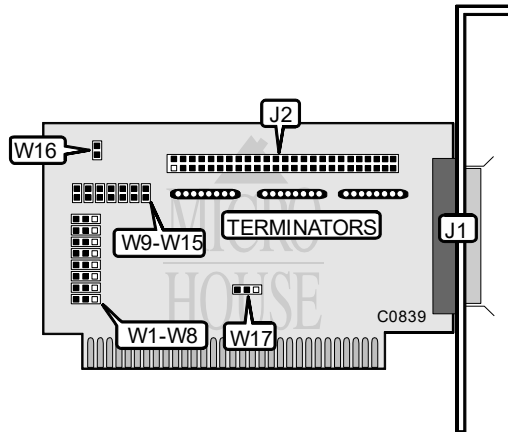

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	J1
50-pin SCSI connector - internal	J2

SCSI ID SELECTION			
SCSI ID	W6	W7	W8
7	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
0	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed
1	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed
2	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
3	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed
4	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed
5	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
6	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed

Continued on next page...

DATA TECHNOLOGY CORPORATION

DTC 3150V

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured - do not alter	W3/pins 1 & 2	closed
í Edge triggered interrupt enabled	W4/pins 2 & 3	closed
Level triggered interrupt enabled	W4/pins 1 & 2	closed
í SCSI parity enabled	W5/pins 2 & 3	closed
SCSI parity disabled	W5/pins 1 & 2	closed
í Factory configured - do not alter	W16	open
í Factory configured - do not alter	W17/pins 1 & 2	closed

BIOS ADDRESS SELECTION			
Address	W9	W10	W11
í D800-DBFFh	open	open	open
C800-CBFFh	open	open	closed
CC00-CFFFh	closed	open	closed
D000-D3FFh	open	closed	closed
D400-D7FFh	closed	closed	closed
DC00-DFFFh	closed	open	open
E000-E3FFh	open	closed	open
E400-E7FFh	closed	closed	open

INTERRUPT SELECTION						
IRQ	W1	W2	W12	W13	W14	W15
í 5	pins 1 & 2	pins 2 & 3	open	closed	open	open
4	pins 2 & 3	pins 2 & 3	closed	open	open	open
6	pins 2 & 3	pins 1 & 2	open	open	open	closed
7	pins 1 & 2	pins 1 & 2	open	open	closed	open
Disabled	pins 1 & 2	pins 1 & 2	open	open	open	open

MISCELLANEOUS TECHNICAL NOTES	
Remove terminators only when connecting both internal & external devices.	