


GIGA-BYTE TECHNOLOGY CO., LTD. GA-108

Q4/95

Data bus: 32-bit PCI
 Size: Half-length, full-height card
 Hard drive supported: Four IDE(AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

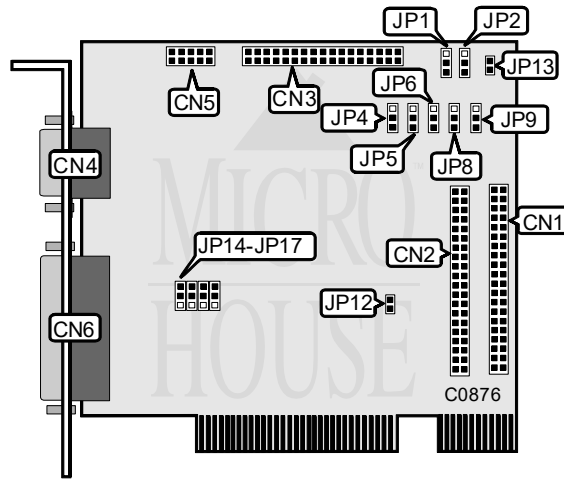

CONNECTIONS	
Function	Location
40-pin primary IDE(AT) connector	CN1
40-pin secondary IDE(AT) connector	CN2
34-pin cable connector - floppy drive	CN3
9-pin serial port 1 - external	CN4
10-pin serial port 2 - internal	CN5
25-pin parallel port - external	CN6
2-pin connector - drive active LED	JP13

Continued on next page. . .

GIGA-BYTE TECHNOLOGY CO., LTD.

GA-108

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Serial port 2 is COM2	JP1/pins 1 & 2	closed
Serial port 2 is COM4	JP1/pins 2 & 3	closed
Serial port 2 enabled	JP2/pins 1 & 2	closed
Serial port 2 disabled	JP2/pins 2 & 3	closed
Floppy drive interface enabled	JP4/pins 1 & 2	closed
Floppy drive interface disabled	JP4/pins 2 & 3	closed
Parallel port is LPT2	JP5/pins 1 & 2	closed
Parallel port is LPT3	JP5/pins 2 & 3	closed
Parallel port enabled	JP6/pins 1 & 2	closed
Parallel port disabled	JP6/pins 2 & 3	closed
Serial port 1 is COM1	JP8/pins 1 & 2	closed
Serial port 1 is COM3	JP8/pins 2 & 3	closed
Serial port 1 enabled	JP9/pins 1 & 2	closed
Serial port 1 disabled	JP9/pins 2 & 3	closed
IDE(AT) interface enabled	JP12	open
IDE(AT) interface disabled	JP12	closed

PCI INTERRUPT SELECTION FOR PRIMARY IDE				
INT	JP14 pins 2 & 3	JP15 pins 2 & 3	JP16 pins 2 & 3	JP17 pins 2 & 3
D	open	open	open	closed
A	closed	open	open	open
B	open	closed	open	open
C	open	open	closed	open

PCI INTERRUPT SELECTION FOR SECONDARY IDE				
INT	JP14 pins 1 & 2	JP15 pins 1 & 2	JP16 pins 1 & 2	JP17 pins 1 & 2
C	open	open	closed	open
A	closed	open	open	open
B	open	closed	open	open
D	open	open	open	closed